

TTA Standard

정보통신단체표준(영문표준)

TTAE.IE-802.3.1-2011

제정일: 2012년 12월 21일

이더넷 관리 정보 베이스(MIB)  
정의(IEEE802.3.1-2011)

Management Information Base (MIB)  
Definitions for Ethernet



이더넷 관리 정보 베이스(MIB) 정의  
(IEEE802.3.1-2011)

Management Information Base (MIB)  
Definitions for Ethernet



# 서 문

## 1. 표준의 목적

본 표준은 네트워크 관리 프로토콜을 사용하여 IEEE 802.3 표준 (이더넷) 기반의 장치를 제어하고, 감시하기 위한 계층적 관리 객체들의 집합인 이더넷 관리 정보 베이스 모듈에 대한 제반 사항을 제공한다.

## 2. 주요 내용 요약

본 표준은 IETF 에서 이미 정의한 관리 정보 구조 버전 2 (SMIPv2; Structure of Management Information Version 2) MIB 모듈 규격과 IEEE 802.3 에서 이미 정의한 관리 객체 정의 지침 (GDMO; Guidelines for the Definition of Managed Objects) MIB 모듈뿐만 아니라 IEEE 802.3 최신 개정으로 인한 확장 내용까지를 포함한다. SMIPv2 MIB 모듈은 이더넷을 관리하는데 일반적으로 사용하는 SNMP (Simple Network Management Protocol)을 위한 것이다. 본 표준은 이더넷 LLDP 확장 MIB, 이더넷 OAM MIB, 이더넷 리피터 장치 MIB, MDI 를 통한 이더넷 DTE 전원 MIB, EPON MIB, Ethernet-like 인터페이스 MIB, EFMCu 인터페이스 MIB, 이더넷 WIS MIB, 이더넷 MAUs MIB 등의 모듈을 정의한다.

## 3. 표준 적용 산업 분야 및 산업에 미치는 영향

본 표준은 IEEE 802.3 (이더넷) MIB 정의에 대한 규격을 제공함으로써 네트워크 사업자가 이더넷 기반 장치 (리피터/허브, 스위치 등)의 정보 (Information), 자원 (Resource) 등을 효율적으로 제어 및 감시 할 수 있도록 한다.

## 4. 참조 표준(권고)

### 4.1. 국외 표준(권고)

- IEEE 802.3.1-2011, "IEEE Standard for Management Information Base (MIB) Definitions for Ethernet", 2011.7.

본 TTA 표준은 IEEE 와의 라이선스 동의하에 IEEE 802.3.1-2011, "IEEE Standard for Management Information Base (MIB) Definitions for Ethernet", 2011.7 을 기반으로 재발행되었으며, 본 문서에 대한 저작권은 IEEE, 445 Hoes Lane Piscataway, NJ, USA 에 있습니다.

4.2. 국내 표준

- 해당 사항 없음

5. 참조 표준(권고)과의 비교

5.1. 참조 표준(권고)과의 관련성

본 표준은 참조 표준을 영문 그대로 완전히 수용하는 표준이다.

5.2. 참조한 표준(권고)과 본 표준의 비교표

TTAE.IE-802.3.1-2011	IEEE 802.3.1-2011	비고
1. 개요 1.1 범주 1.2 목적 1.3 인터넷-표준 관리 프레임워크 1.4 보안 고려 사항 1.5 적합성	1. Overview 1.1 Scope 1.2 Purpose 1.3 Internet-Standard Management Framework 1.4 Security considerations 1.5 Conformance	동일
2. 규정 참고문헌	2. Normative reference	동일
3. 정의	3. Definitions	동일
4. 약어	4. Abbreviations	동일
5. 이더넷 LLDP 확장 MIB 모듈 5.1 IEEE 802.3 LLDP 확장 MIB 구조 5.2 다른 MIB 모듈들과의 관계 5.3 IEEE 802.3 LLDP 확장 MIB 에 대한 보안 고려 사항 5.4 MIB 모듈 정의	5. Ethernet logical link discovery protocol (LLDP) extension MIB module 5.1 Structure of the IEEE 802.3 LLDP extension MIB 5.2 Relationship to other MIBs 5.3 Security considerations for IEEE 802.3 LLDP extension MIB module 5.4 MIB module definition	동일
6. 이더넷 OAM MIB 모듈 6.1 소개 6.2 개요 6.3 다른 MIB 모듈들과의 관계 6.4 MIB 구조	6. Ethernet operations, administrations, and maintenance (OAM) MIB module 6.1 Introduction 6.2 Overview 6.3 Relation to other MIB modules 6.4 MIB structure	동일

6.5 이더넷 OAM MIB 모듈에 대한 보안 고려 사항	6.5 Security considerations for Ethernet operations, administration, and maintenance (OAM) MIB module	
6.6 MIB 모듈 정의	6.6 MIB module definition	
7. 이더넷 리피터 장치 MIB 모듈	7. Ethernet repeater device MIB module	
7.1 개요	7.1 Overview	동일
7.2 토폴로지 매핑	7.2 Topology mapping	
7.3 MIB 모듈 정의	7.3 MIB module definition	
8. MDI 를 통한 이더넷 DTE 전원 MIB 모듈	8. Ethernet data terminal equipment (DTE) power via medium dependent interface (MDI) MIB module	
8.1 소개	8.1 Introduction	동일
8.2 개요	8.2 Overview	
8.3 MIB 구조	8.3 MIB structure	
8.4 MDI 를 통한 DTE 전력 MIB 모듈에 대한 보안 고려 사항	8.4 Security considerations for Ethernet data terminal equipment (DTE) power via medium dependent interface (MDI) MIB module	
8.5 MIB 모듈 정의	8.5 MIB module definition	
9. EPON MIB 모듈	9. Ethernet passive optical networks (EPON) MIB module	
9.1 소개	9.1 Overview	동일
9.2 MIB 구조	9.2 MIB structure	
9.3 다른 MIB 모듈들과의 관계	9.3 Relationship to other MIB modules	
9.4 IEEE 802.3 관리 객체들과의 매핑	9.4 Mapping of IEEE 802.3 managed objects	
9.5 EPON MIB 모듈에 대한 보안 고려 사항	9.5 Security considerations for Ethernet passive optical networks (EPON) MIB module	
9.6 MIB 모듈 정의	9.6 MIB module definition	
10. Ethernet-like 인터페이스 MIB 모듈	10. Ethernet-like interface MIB module	
10.1 소개	10.1 Introduction	동일
10.2 개요	10.2 Overview	
10.3 Ethernet-like MIB 모듈에 대한 보안 고려 사항	10.3 Security considerations for Ethernet-like interface MIB module	
10.4 MIB 모듈 정의	10.4 MIB module definition	

11. EFMCu 인터페이스 MIB 모듈 11.1 소개 11.2 다른 MIB 모듈들과의 관계 11.3 MIB 구조 11.4 EFMCu MIB 모듈에 대한 보안 고려 사항 11.5 MIB 모듈 정의	11. Ethernet in the First Mile copper (EFMCu) interface MIB module 11.1 Introduction 11.2 Relation to other MIB modules 11.3 MIB structure 11.4 Security considerations for Ethernet in the First Mile copper interfaces MIB module 11.5 MIB module definition	동일
12. 이더넷 WIS MIB 모듈 12.1 개요 12.2 이더넷 WIS MIB 모듈에 대한 보안 고려 사항	12. Ethernet wide area Network (WAN) interface sublayer (WIS) MIB module 12.1 Overview 12.2 Security considerations for Ethernet wide area network (WAN) interface sublayer (WIS) MIB module	동일
부속서 12A (정보) WIS MDIO 를 사용한 성능 데이터 수집	Annex 12A (informative) Collection of performance data using WIS MDIO	동일
13. 이더넷 MAUs MIB 모듈 13.1 소개 13.2 개요 13.3 이더넷 MAUs MIB 모듈에 대한 보안 고려 사항 13.4 IANA 고려 사항 13.5 MIB 모듈 정의	13. Ethernet medium attachment units (MAUs) MIB module 13.1 Introduction 13.2 Overview 13.3 Security considerations for Ethernet medium attachment units (MAUs) MIB module 13.4 IANA considerations 13.5 MIB module definition	동일
부속서 A (정보) 인용문헌	Annex A (informative) Bibliography	동일
부속서 B (규정) IEEE 802.3 관리 객체 클래스를 위한 GDMO 규격	Annex B (normative) GDMO specification of IEEE 802.3 managed object classes	동일
부속서 C (규정) 관리를 위한 GDMO 및 ASN.1 정의	Annex C (normative) GDMO and ASN.1 definitions for management	동일

## 6. 지적재산권 관련사항

본 표준의 ‘지적재산권 요약서’ 제출 현황은 TTA 웹사이트에서 확인할 수 있다.

※본 표준을 이용하는 자는 이용함에 있어 지적재산권이 포함되어 있을 수 있으므로, 확인 후 이용한다.

※ 본 표준과 관련하여 접수된 특허서 이외에도 지적재산권이 존재할 수 있다.

## 7. 시험 인증 관련 사항

### 7.1. 시험 인증 대상 여부

- 해당 사항 없음

### 7.2. 시험 표준 제정 현황

- 해당 사항 없음

## 8. 표준의 이력 정보

### 8.1. 표준의 이력

판수	제정.개정일	제정.개정 내역
제 1 판	2012.12.21	제정 TTAE.IE-802.3.1-2011

### 8.2. 주요 개정 사항

- 해당 사항 없음

# Preface

## 1. Purpose of Standard

This standard specifies Management Information Base (MIB) modules for IEEE 802.3 (Ethernet), includes set of hierarchically managed objects to control, observe Ethernet devices through network management protocol

## 2. Summary of Contents

This standard includes the Structure of Management Information Version 2 (SMIv2) MIB module specifications formerly produced and published by the Internet Engineering Task Force (IETF), and the Guidelines for the Definition of Managed Objects (GDMO) MIB modules formerly specified within IEEE Std 802.3, as well as extensions resulting from recent amendments to IEEE Std 802.3. The SMIv2 MIB modules are intended for use with the Simple Network Management Protocol (SNMP), commonly used to manage Ethernet. It specifies modules for Ethernet LLDP extension MIB, Ethernet OAM MIB, Ethernet repeater device MIB, Ethernet DTE via MDI MIB, EPON MIB, Ethernet-like interface MIB, EFMCu interface MIB, Ethernet WIS MIB, Ethernet MAUs MIB, etc..

## 3. Applicable Fields of Industry and its Effect

This standard enables service provider to control, observe information and resource of Ethernet devices effectively by providing MIB definition for IEEE 802.3 (Ethernet).

## 4. Reference Standards(Recommendations)

### 4.1. International Standards(Recommendations)

- IEEE 802.3.1-2011, "IEEE Standard for Management Information Base (MIB) Definitions for Ethernet", 2011.7.

This TTA Adoption is based on IEEE 802.3.1-2011, "IEEE Standard for Management Information Base (MIB) Definitions for Ethernet", 2011.7. Copyright IEEE, All rights reserved, 445 Hoes Lane Piscataway, NJ, USA. Reprinted pursuant to license agreement with IEEE.

## 4.2. Domestic Standards

– None

## 5. Relationship to Reference Standards(Recommendations)

### 5.1. Relationship of Reference Standards

This standard is fully equivalent to IEEE Std 802.3.1–2011.

### 5.2. Differences between Reference Standard(Recommendation) and this Standard

TTAE.IE-802.3.1-2011	IEEE 802.3.1-2011	Remarks
1. Overview 1.1 Scope 1.2 Purpose 1.3 Internet-Standard Management Framework 1.4 Security considerations 1.5 Conformance	1. Overview 1.1 Scope 1.2 Purpose 1.3 Internet-Standard Management Framework 1.4 Security considerations 1.5 Conformance	Equivalent
2. Normative reference	2. Normative reference	Equivalent
3. Definitions	3. Definitions	Equivalent
4. Abbreviations	4. Abbreviations	Equivalent
5. Ethernet logical link discovery protocol (LLDP) extension MIB module 5.1 Structure of the IEEE 802.3 LLDP extension MIB 5.2 Relationship to other MIBs 5.3 Security considerations for IEEE 802.3 LLDP extension MIB module 5.4 MIB module definition	5. Ethernet logical link discovery protocol (LLDP) extension MIB module 5.1 Structure of the IEEE 802.3 LLDP extension MIB 5.2 Relationship to other MIBs 5.3 Security considerations for IEEE 802.3 LLDP extension MIB module 5.4 MIB module definition	Equivalent
6. Ethernet operations, administrations, and maintenance (OAM) MIB module 6.1 Introduction 6.2 Overview 6.3 Relation to other MIB modules 6.4 MIB structure	6. Ethernet operations, administrations, and maintenance (OAM) MIB module 6.1 Introduction 6.2 Overview 6.3 Relation to other MIB modules 6.4 MIB structure	Equivalent

6.5 Security considerations for Ethernet operations, administration, and maintenance (OAM) MIB module 6.6 MIB module definition	6.5 Security considerations for Ethernet operations, administration, and maintenance (OAM) MIB module 6.6 MIB module definition	
7. Ethernet repeater device MIB module 7.1 Overview 7.2 Topology mapping 7.3 MIB module definition	7. Ethernet repeater device MIB module 7.1 Overview 7.2 Topology mapping 7.3 MIB module definition	Equivalent
8. Ethernet data terminal equipment (DTE) power via medium dependent interface (MDI) MIB module 8.1 Introduction 8.2 Overview 8.3 MIB structure 8.4 Security considerations for Ethernet data terminal equipment (DTE) power via medium dependent interface (MDI) MIB module 8.5 MIB module definition	8. Ethernet data terminal equipment (DTE) power via medium dependent interface (MDI) MIB module 8.1 Introduction 8.2 Overview 8.3 MIB structure 8.4 Security considerations for Ethernet data terminal equipment (DTE) power via medium dependent interface (MDI) MIB module 8.5 MIB module definition	Equivalent
9. Ethernet passive optical networks (EPON) MIB module 9.1 Overview 9.2 MIB structure 9.3 Relationship to other MIB modules 9.4 Mapping of IEEE 802.3 managed objects 9.5 Security considerations for Ethernet passive optical networks (EPON) MIB module 9.6 MIB module definition	9. Ethernet passive optical networks (EPON) MIB module 9.1 Overview 9.2 MIB structure 9.3 Relationship to other MIB modules 9.4 Mapping of IEEE 802.3 managed objects 9.5 Security considerations for Ethernet passive optical networks (EPON) MIB module 9.6 MIB module definition	Equivalent
10. Ethernet-like interface MIB module 10.1 Introduction 10.2 Overview 10.3 Security considerations for Ethernet-like interface MIB module 10.4 MIB module definition	10. Ethernet-like interface MIB module 10.1 Introduction 10.2 Overview 10.3 Security considerations for Ethernet-like interface MIB module 10.4 MIB module definition	Equivalent

11. Ethernet in the First Mile copper (EFMCu) interface MIB module 11.1 Introduction 11.2 Relation to other MIB modules 11.3 MIB structure 11.4 Security considerations for Ethernet in the First Mile copper interfaces MIB module 11.5 MIB module definition	11. Ethernet in the First Mile copper (EFMCu) interface MIB module 11.1 Introduction 11.2 Relation to other MIB modules 11.3 MIB structure 11.4 Security considerations for Ethernet in the First Mile copper interfaces MIB module 11.5 MIB module definition	Equivalent
12. Ethernet wide area Network (WAN) interface sublayer (WIS) MIB module 12.1 Overview 12.2 Security considerations for Ethernet wide area network (WAN) interface sublayer (WIS) MIB module	12. Ethernet wide area Network (WAN) interface sublayer (WIS) MIB module 12.1 Overview 12.2 Security considerations for Ethernet wide area network (WAN) interface sublayer (WIS) MIB module	Equivalent
Annex 12A (informative) Collection of performance data using WIS MDIO	Annex 12A (informative) Collection of performance data using WIS MDIO	Equivalent
13. Ethernet medium attachment units (MAUs) MIB module 13.1 Introduction 13.2 Overview 13.3 Security considerations for Ethernet medium attachment units (MAUs) MIB module 13.4 IANA considerations 13.5 MIB module definition	13. Ethernet medium attachment units (MAUs) MIB module 13.1 Introduction 13.2 Overview 13.3 Security considerations for Ethernet medium attachment units (MAUs) MIB module 13.4 IANA considerations 13.5 MIB module definition	Equivalent
Annex A (informative) Bibliography	Annex A (informative) Bibliography	Equivalent
Annex B (normative) GDMO specification of IEEE 802.3 managed object classes	Annex B (normative) GDMO specification of IEEE 802.3 managed object classes	Equivalent
Annex C (normative) GDMO and ASN.1 definitions for management	Annex C (normative) GDMO and ASN.1 definitions for management	Equivalent

## 6. Statement of Intellectual Property Rights

IPRs related to the present document may have been declared to TTA. The information pertaining to these IPRs, if any, is available on the TTA Website.

No guarantee can be given as to the existence of other IPRs not referenced on the

TTA website.

And, please make sure to check before applying the standard.

## 7. Statement of Testing and Certification

### 7.1. Object of Testing and Certification

- None

### 7.2. Standards of Testing and Certification

- None

## 8. History of Standard

### 8.1. Change History

Edition	Issued date	Outline
The 1st edition	2012.12.21	Established TTAE.IE-802.3.1-2011

### 8.2. The Revisions

- None

## 목 차

1. 개요 .....	1
1.1 범주 .....	2
1.2 목적 .....	2
1.3 인터넷-표준 관리 프레임워크 .....	2
1.4 보안 고려 사항 .....	2
1.5 적합성 .....	3
2. 규정 참고문헌 .....	5
3. 정의 .....	7
4. 약어 .....	9
5. 이더넷 LLDP (Logical Link Discovery Protocol) 확장 MIB 모듈 .....	11
5.1 IEEE 802.3 LLDP 확장 MIB 구조 .....	11
5.2 다른 MIB 모듈들과의 관계 .....	11
5.3 IEEE 802.3 LLDP 확장 MIB 에 대한 보안 고려 사항 .....	14
5.4 MIB 모듈 정의 .....	15
6. 이더넷 OAM (Operations, Administration, Maintenance) MIB 모듈 .....	31
6.1 소개 .....	31
6.2 개요 .....	31
6.3 다른 MIB 모듈들과의 관계 .....	32
6.4 MIB 구조 .....	35

6.5 이더넷 OAM MIB 모듈에 대한 보안 고려 사항 .....	35
6.6 MIB 모듈 정의 .....	36
7. 이더넷 리피터 장치 MIB 모듈.....	73
7.1 개요 .....	73
7.2 토폴로지 매핑.....	74
7.3 MIB 모듈 정의 .....	74
8. MDI (Media Dependent Interface)를 통한 이더넷 DTE (Data Terminal Equipment) 전원 MIB 모듈 .....	119
8.1 소개 .....	119
8.2 개요 .....	119
8.3 MIB 구조 .....	119
8.4 MDI 를 통한 DTE 전력 MIB 모듈에 대한 보안 고려 사항 .....	119
8.5 MIB 모듈 정의 .....	120
9. EPON (Ethernet Passive Optical Network) MIB 모듈.....	133
9.1 소개 .....	133
9.2 MIB 구조 .....	140
9.3 다른 MIB 모듈들과의 관계 .....	144
9.4 IEEE 802.3 관리 객체들과의 매핑 .....	150
9.5 EPON MIB 모듈에 대한 보안 고려 사항.....	153
9.6 MIB 모듈 정의 .....	154

10. Ethernet-like 인터페이스 MIB 모듈 .....	197
10.1 소개 .....	197
10.2 개요 .....	197
10.3 Ethernet-like MIB 모듈에 대한 보안 고려 사항 .....	197
10.4 MIB 모듈 정의 .....	197
11. EFMCu (Ethernet in the First Mile copper) 인터페이스 MIB 모듈 .....	233
11.1 소개 .....	233
11.2 다른 MIB 모듈들과의 관계 .....	233
11.3 MIB 구조 .....	240
11.4 EFMCu MIB 모듈에 대한 보안 고려 사항 .....	242
11.5 MIB 모듈 정의 .....	243
12. 이더넷 WIS (WAN Interface Sublayer) MIB 모듈 .....	299
12.1 개요 .....	299
12.2 이더넷 WIS MIB 모듈에 대한 보안 고려 사항 .....	309
부속서 12A (정보) WIS MDIO 를 사용한 성능 데이터 수집 .....	321
13. 이더넷 MAUs (Media Attachment Units) MIB 모듈 .....	323
13.1 소개 .....	323
13.2 개요 .....	323
13.3 이더넷 MAUs MIB 모듈에 대한 보안 고려 사항 .....	327
13.4 IANA 고려 사항 .....	327

13.5 MIB 모듈 정의..... 327

부속서 A (정보) 인용문헌..... 355

부속서 B (규정) IEEE 802.3 관리 객체 클래스를 위한 관리 객체 정의 지침 (GDMO) 규격..... 359

부속서 C (규정) 관리를 위한 GDMO 및 ASN.1 정의..... 445



# Contents

1. Overview.....	1
1.1 Scope.....	2
1.2 Purpose.....	2
1.3 Internet-Standard Management Framework.....	2
1.4 Security Considerations.....	2
1.5 Conformance.....	3
2. Normative References.....	5
3. Definitions.....	7
4. Abbreviations.....	9
5. Ethernet Logical Link Discovery Protocol (LLDP) Extension MIB Module.....	11
5.1 Structure of the IEEE 802.3 LLDP Extension MIB.....	11
5.2 Relationship to Other MIBs.....	11
5.3 Security Considerations for IEEE 802.3 LLDP Extension MIB Module.....	14
5.4 MIB Module Definition.....	15
6. Ethernet Operations, Administration, and Maintenance (OAM) MIB Module.....	31
6.1 Introduction.....	31
6.2 Overview.....	31
6.3 Relation to other MIB Modules.....	32
6.4 MIB Structure.....	35

6.5 Security Considerations for Ethernet Operations, Administration, and Maintenance (OAM) MIB Module .....	35
6.6 MIB Module Definition .....	36
7. Ethernet Repeater Device MIB Module .....	73
7.1 Overview .....	73
7.2 Topology Mapping.....	74
7.3 MIB Module Definition .....	74
8. Ethernet Data Terminal Equipment (DTE) Power via Medium Dependent Interface (MDI) MIB Module .....	119
8.1 Introduction .....	119
8.2 Overview .....	119
8.3 MIB Structure .....	119
8.4 Security Considerations for Ethernet Data Terminal Equipment (DTE) Power via Medium Dependent Interface (MDI) MIB Module .....	119
8.5 MIB Module Definition .....	120
9. Ethernet Passive Optical Networks (EPON) MIB Module .....	133
9.1 Overview .....	133
9.2 MIB Structure .....	140
9.3 Relationship to other MIB Modules.....	144
9.4 Mapping of IEEE 802.3 Managed Objects.....	150
9.5 Security Considerations for Ethernet Passive Optical Networks (EPON) MIB Module .....	153

9.6 MIB Module Definition .....	154
10. Ethernet-like Interface MIB Module .....	197
10.1 Introduction .....	197
10.2 Overview .....	197
10.3 Security Considerations for Ethernet-like Interface MIB Module .....	205
10.4 MIB Module Definition .....	205
11. Ethernet in the First Mile Copper (EFMCu) Interfaces MIB Module .....	233
11.1 Introduction .....	233
11.2 Relation to other MIB Modules .....	233
11.3 MIB Structure .....	240
11.4 Security Considerations for Ethernet in the First Mile Copper Interfaces MIB Module .....	242
11.5 MIB Module Definition .....	243
12. Ethernet Wide Area Network (WAN) Interface Sublayer (WIS) MIB Module .....	299
12.1 Overview .....	299
12.2 Security Considerations for Ethernet Wide Area Network (WAN) Interface Sublayer (WIS) MIB Module .....	309
Annex 12A (informative) Collection of Performance Data using WIS MDIO Registers .....	321
13. Ethernet Medium Attachment Units (MAUs) MIB Module .....	323
13.1 Introduction .....	323
13.2 Overview .....	323

13.3 Security Considerations for Ethernet Medium Attachment Units (MAUs) MIB Module ..... 327

13.4 IANA Considerations ..... 327

13.5 MIB Module Definition ..... 327

Annex A (informative) Bibliography ..... 355

Annex B (normative) GDMO Specification of IEEE 802.3 Managed Object Classes.. 359

Annex C (normative) GDMO and ASN.1 Definitions for Management ..... 445



# IEEE Standard for Management Information Base (MIB) Definitions for Ethernet

*IMPORTANT NOTICE: This standard is not intended to ensure safety, security, health, or environmental protection. Implementers of the standard are responsible for determining appropriate safety, security, environmental, and health practices or regulatory requirements.*

*This IEEE document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading “Important Notice” or “Important Notices and Disclaimers Concerning IEEE Documents.” They can also be obtained on request from IEEE or viewed at <http://standards.ieee.org/IPR/disclaimers.html>.*

## 1. Overview

This document supersedes and makes obsolete IEEE Std 802.3<sup>TM</sup>-2008 Annex 30A and Annex 30B, IEEE Std 802.1AB<sup>TM</sup>-2009 Annex F, IETF RFC 2108, IETF RFC 3621, IETF RFC 3635, IETF RFC 3637, IETF RFC 4836, IETF RFC 4837, IETF RFC 4878, and IETF RFC 5066.<sup>1</sup>

Ethernet technology, as defined by the IEEE 802.3 Working Group of the IEEE, continues to evolve, with scalable increases in speed, new types of cabling and interfaces, and new features. This evolution may require changes in the managed objects in order to reflect this new functionality. This document, as with other documents issued by this working group, reflects a certain stage in the evolution of Ethernet technology. In the future, this document might be revised, or new documents might be issued, in order to reflect the evolution of Ethernet technology.

The term “Ethernet-like interfaces” was historically used because the interfaces defined by the IEEE 802.3 Working Group were not considered “Ethernet” per se, but “Ethernet-like”, because “Ethernet” was taken to mean “Ethernet version 2” according to the (DEC, Intel, Xerox) DIX “blue book”. Today and in the context of SNMP management and SMIv2 MIB modules, “Ethernet,” “Ethernet-like,” and “IEEE 802.3” are synonymous and interchangeable in the marketplace. The term “Ethernet-like” is retained in this document because of its common usage in the SNMP-based network management community.

---

<sup>1</sup>Information on references can be found in Clause 2.

## 1.1 Scope

This standard contains the Management Information Base (MIB) module specifications for IEEE Std 802.3, also known as Ethernet. It includes the Structure of Management Information Version 2 (SMIv2) MIB module specifications formerly produced and published by the Internet Engineering Task Force (IETF), and the Guidelines for the Definition of Managed Objects (GDMO) MIB modules formerly specified within IEEE Std 802.3, as well as extensions resulting from recent amendments to IEEE Std 802.3. The SMIv2 MIB modules are intended for use with the Simple Network Management Protocol (SNMP), commonly used to manage Ethernet.

## 1.2 Purpose

The purpose of the standard is to publish the SMIv2 and GDMO MIB module specifications in a single document that is separate from IEEE Std 802.3, and that can be published in a machine-readable format. Future amendments and revisions to IEEE Std 802.3.1 will be performed to update the MIB specifications as required to track future amendments and revisions to IEEE Std 802.3.

## 1.3 Internet-Standard Management Framework

For a detailed overview of the documents that describe the current Internet-Standard Management Framework, please refer to section 7 of IETF RFC 3410.

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. MIB objects are generally accessed through the Simple Network Management Protocol (SNMP).

Objects in the MIB are defined using the mechanisms defined in the Structure of Management Information (SMI). This standard specifies MIB modules that are compliant to the SMIv2, which is described in IETF STD 58 (RFC 2578), IETF STD 58 (RFC 2579), and IETF STD 58 (RFC 2580).

## 1.4 Security considerations

SNMP versions prior to SNMPv3 did not include adequate security. Even if the network itself is secure (for example by using IPSec), there is no control as to who on the secure network is allowed to access and GET/SET (read/change/create/delete) the objects in a MIB module.

Implementers should consider the security features as provided by the SNMPv3 framework (see IETF RFC 3410, section 8), including full support for the SNMPv3 cryptographic mechanisms (for authentication and privacy).

SNMPv3 should be deployed, rather than previous versions of SNMP, and cryptographic security should be enabled. It is then a customer/operator responsibility to ensure that the SNMP entity giving access to an instance of this MIB module is properly configured to give access to the objects only to those principals (users) that have legitimate rights to indeed GET or SET (change/create/delete) them.

Throughout this standard, there are a number of accessible management objects that may be considered sensitive or vulnerable in some network environments. The support for some operations in a non-secure environment without proper protection can have a negative effect on network operations. Such management objects are detailed in the clauses that define them.

The user of these MIB modules should therefore be aware that support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations.

The readable objects in these MIB modules (i.e., those with MAX-ACCESS other than not-accessible) may be considered sensitive in some environments since, collectively, they provide information about the performance of network interfaces and can reveal some aspects of their configuration. In such environments it is important to control GET and NOTIFY access to these objects and possibly encrypt their values when sending them over the network via SNMP.

## **1.5 Conformance**

Specific conformance statements and compliance statements, written in accordance with IETF STD 58, RFC 2580, are included in each MIB module. They can be found by searching for the text strings “Conformance statements” and “Compliance statements”.



## 2. Normative references

The following referenced documents are indispensable for the application of this document (i.e., they must be understood and used, so each referenced document is cited in text and its relationship to this document is explained). For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments or corrigenda) applies.

ANSI T1.231-1997, Layer 1 In-Service Digital Transmission Performance Monitoring.<sup>2</sup>

ANSI T1.424-2004, Interface Between Networks and Customer Installation—Very-high-bit-rate Digital Subscriber Lines (VDSL) Metallic Interface (DMT Based).

ETSI TS1 101 270-1, (1999) Transmission and Multiplexing (TM); Access transmission systems on metallic access cables; Very high speed Digital Subscriber Line (VDSL); Part 1: Functional requirements.<sup>3</sup>

IEEE Std 802<sup>®</sup>, IEEE Standard for Local and Metropolitan Area Networks: Architecture and Overview.<sup>4, 5</sup>

IEEE Std 802.1D<sup>™</sup>, IEEE Standard for Local and metropolitan area networks Media Access Control (MAC) Bridges.

IEEE Std 802.1AB-2009 Station and Media Access Control Discovery.

IEEE Std 802.3, IEEE Standard for Information technology—Telecommunications and information exchange between systems—Local and metropolitan area networks—Specific requirements—Part 3: Carrier sense multiple access with collision detection (CSMA/CD) access method and physical layer specifications.

IETF RFC 1213, *Management Information Base for Network Management of TCP/IP-based internets: MIB-II*, McCloghrie, K., and M. Rose, March 1991.<sup>6</sup>

IETF RFC 1516, *Definitions of Managed Objects for IEEE 802.3 Repeater Devices*, McMaster, D., and K. McCloghrie, September 1993.

IETF RFC 2119, *Keywords for use in RFCs to Indicate Requirement Levels*, Bradner, S., March 1997.

IETF RFC 2434, *Guidelines for Writing an IANA Considerations Section in RFCs*, Narten, T. and H. Alvestrand, October 1998.

IETF STD 58 (RFC 2578), *Structure of Management Information Version 2 (SMIPv2)*, McCloghrie, K., Perkins, D., and J. Schoenwaelder, April 1999.

IETF STD 58 (RFC 2579), *Textual Conventions for SMIPv2*, McCloghrie, K., Perkins, D., and J. Schoenwaelder, April 1999.

<sup>2</sup>ANSI publications are available from the Sales Department, American National Standards Institute, 25 West 43rd Street, 4th Floor, New York, NY 10036, USA (<http://www.ansi.org>).

<sup>3</sup>ETSI standards are available from the European Telecommunications Standards Institute at 650, Route des Lucioles, 06921 Sophia-Antipolis Cedex, France (<http://www.etsi.org/>).

<sup>4</sup>IEEE publications are available from the Institute of Electrical and Electronics Engineers, Inc., 445 Hoes Lane, Piscataway, NJ 08854, USA (<http://standards.ieee.org/>).

<sup>5</sup>The IEEE standards or products referred to in this clause are trademarks of the Institute of Electrical and Electronics Engineers, Inc.

<sup>6</sup>Internet Requests for Comments (RFCs) are available on the World Wide Web at the following ftp site: venera.isi.edu; logon: anonymous; password: user's e-mail address; directory: in-inotes.

IETF STD 58 (RFC 2580), *Conformance Statements for SMIv2*, McCloghrie, K., Perkins, D., and J. Schoenwaelder, April 1999.

IETF RFC 2856, *Textual Conventions for Additional High Capacity Data Types*, Bierman, A., McCloghrie, K., and R. Presuhn, June 2000.

IETF RFC 2863, *The Interfaces Group MIB*, McCloghrie, K. and F. Kastenholz, June 2000.

IETF RFC 2864, *The Inverted Stack Table Extension to the Interfaces Group MIB*, McCloghrie, K. and G. Hanson, June 2000.

IETF RFC 3410, *Introduction and Applicability Statements for Internet Standard Management Framework*, Case, J., Mundy R., Partain, D. and B. Stewart, December 2002.

IETF RFC 3411, *An Architecture for Describing Simple Network Management Protocol (SNMP) Management Frameworks*, Harrington, D., Presuhn, R. and B. Wijnen, December 2002.

IETF RFC 3592, *Definitions of Managed Objects for the Synchronous Optical Network/Synchronous Digital Hierarchy (SONET/SDH) Interface Type*, Tesink, K., September 2003.

ITU-T Recommendation G.983.1, 1998—Optical line systems for local and access networks—Broadband optical access systems based on Passive Optical Networks (PON).<sup>7</sup>

ITU-T Recommendation G.991.2, 2003—Single-pair High-speed Digital Subscriber Line (SHDSL) transceivers.

ITU-T Recommendation G.993.1, 2004—Very High speed Digital Subscriber Line transceivers.

---

<sup>7</sup>ITU-T publications are available from the International Telecommunications Union, Place des Nations, CH-1211, Geneva 20, Switzerland/Suisse (<http://www.itu.int/>).

### 3. Definitions

For the purposes of this document, the following terms and definitions apply. The *IEEE Standards Dictionary: Glossary of Terms & Definitions* [B6] should be consulted for terms not defined in this clause.<sup>8</sup>

**3.1 agent:** An entity, typically implemented in software, which provides remote access to management instrumentation, via the Simple Network Management Protocol (SNMP).

**3.2 group:** Within the context of the repeater management MIB module defined in Clause 7: A recommended, but optional, entity defined in IEEE Std 802.3, Clause 30, in order to support a modular numbering scheme. The classical example allows an implementor to represent field-replaceable units as groups of ports, with the port numbering matching the modular hardware implementation.

**3.3 jack type:** The jack connector type, as it appears on the outside of the system. The type of mechanical interface to the transmission medium.

**3.4 Loss of Codegroup Delineation:** See IEEE Std 802.3 50.3.5.3.

**3.5 managed object:** an abstract representation of network resources that are managed. A managed object is defined according to the *Structure of Management Information version 2* (SMIv2) defined in IETF STD 58, RFC 2578.

**3.6 managed repeater:** A repeater as defined by IEEE Std 802.3 incorporating a management entity that complies with the MIB module definition contained in Clause 7 of this document.

**3.7 module:** A building block in a modular system. In the context of the MIB definitions, a specification of management capabilities related to the system. In the context of a chassis, it typically maps into one 'slot'; however, the range of configurations may be very large, with several modules entering one slot, or one module covering several slots.

**3.8 non-trivial repeater:** A repeater as defined by IEEE Std 802.3 having multiple ports.

**3.9 Path Coding violations:** In IEEE Std 802.3 the path layer coding violations count is based on block errors and not BIP-8 errors, i.e., it is incremented only once for each B3 byte that indicates incorrect parity, regardless of the number of bits in error. Note that Section 8.4.5.1 of ANSI T1.231-1997 allows either path BIP-8 errors or path block errors to be used for the path layer error count.

**3.10 repeater system:** A managed entity compliant with this standard, and incorporating at least one managed IEEE Std 802.3 repeater.

**3.11 repeater-unit:** The portion of a repeater that is inboard of its Physical Medium Attachment (PMA)/Physical Signaling Sublayer (PLS), or PMA/Physical Coding Sublayer (PCS).

**3.12 Signal Label Mismatch:** This defect is called Payload Label Mismatch (PLM) in IEEE Std 802.3. It is reported by setting both the sonetPathSignalLabelMismatch bit in the appropriate instance of sonetPathCurrentStatus (defined in IETF RFC 3592) and the etherWisPathPLM bit in the corresponding instance of etherWisPathCurrentStatus.

**3.13 stack:** A scalable system in which modularity is achieved by interconnecting a number of different systems.

---

<sup>8</sup>The numbers in brackets correspond to those of the bibliography in Annex A.

**3.14 STS-Path Remote Defect Indication:** IEEE Std 802.3 mandates the use of ERDI-P (Enhanced Remote Defect Indication-Path) defined in ANSI T1.231-1997 to signal remote server defects (triggered by path AIS or path LOP) and remote payload defects (triggered by Payload Label Mismatch or Loss of Code-group Delineation). IETF RFC 3592 defines the one-bit RDI-P (Remote Defect Indication-Path), which signals remote server detects (i.e., path AIS and path LOP) only. An implementation of the MIB module defined in Clause 12 sets the sonetPathSTSRDI bit in the appropriate instance of sonetPathCurrentStatus when it receives an ERDI-P server defect indication from the remote end. Both ERDI-P payload defects and ERDI-P server defects are reported in the object etherWisFarEndPathCurrentStatus.

**3.15 system:** An entity compliant with one or more MIB modules of this standard.

**3.16 system interconnect segment:** An internal segment allowing interconnection of ports belonging to different physical entities into the same logical managed repeater, bridge, or other system. Examples of implementation might be backplane busses in modular hubs, or chaining cables in stacks of bridges/switches. It is not uncommon for such segments to be a proprietary implementation.

**3.17 trivial repeater-unit:** An isolated port that can gather statistics.

## 4. Abbreviations

ACK	acknowledge
AIS	Alarm Indication Signal
ARP	address resolution protocol
ASCII	American Standard Code for Information Interchange
Atn	attenuation
BER	bit error ratio
BIP	bit interleaved parity
BW	bandwidth
CO	central office
CPE	customer premises equipment
CRC	cyclic redundancy check
DTE	data terminal equipment
EFM	Ethernet in the First Mile
EFMCu	EFM copper
ELTE	Ethernet line termination equipment
EPON	Ethernet passive optical network
ERDI-P	enhanced remote defect indication - path
FCS	frame check sequence
FEC	forward error correction
GDMO	Guidelines for Definition of Managed Objects
GMII	gigabit media independent interface
IANA	Internet Assigned Numbers Authority
IETF	Internet Engineering Task Force
IFG	inter-frame gap
ITU	International Telecommunication Union
LAN	local area network
LCD	Loss of Codegroup Deliniation
LLC	logical link control
LLDP	logical link discovery protocol
LLDPDU	logical link discovery protocol data unit
LLID	logical link identifier
LOP	Loss of Pointer
MAC	media access control
MAU	medium attachment unit
Mb/s	megabit per second
MDI	medium dependent interface
MDIO	management data input/output
MII	media independent interface
MP2PE	multipoint-to-point emulation
MPCP	multipoint control protocol
MPCPDU	multipoint control protocol data unit
MTU	maximum transmission unit
NMS	network management system
OAM	operations, administration and maintenance

OAMPDU	operations, administration, and maintenance protocol data unit
OID	object identifier
OLT	optical line terminal
OMP	optical multipoint
ONU	optical network unit
OSI	Open Systems Interconnection
P2MP	point-to-multipoint
P2PE	point-to-point emulation
PAF	PME aggregation function
PBO	power back-off
PCS	physical coding sublayer
PD	powered device
PDU	protocol data unit
PHY	Physical Layer entity
PLM	Payload Label Mismatch
PMA	physical medium attachment
PMD	physical medium dependent
PME	physical medium entity
PON	passive optical network
PSD	power spectral density
PSE	power sourcing equipment
RFC	Request for Comments
ROM	read-only-memory
RS	reconciliation sublayer
RTT	round-trip time
SDH	Synchronous Digital Hierarchy
SLA	service level agreement
SLD	start of LLID delimiter
SMIPv2	structure of management information version 2
SNMP	simple network management protocol
SNR	signal to noise ratio
SONET	Synchronous Optical Network
TCPAM	trellis coded pulse amplitude modulation
TDM	time division multiplexing
TDMA	time division multiple access
TLV	type/length/value
TQ	time quanta
WAN	wide area network
WDM	wavelength division multiplexing
WIS	WAN interface sublayer

## 5. Ethernet logical link discovery protocol (LLDP) extension MIB module

The logical link discovery protocol (LLDP) is defined in IEEE Std 802.1AB-2009 Station and Media Access Control Discovery. Extensions to this protocol for Ethernet are defined in Clause 79 of IEEE Std 802.3.

### 5.1 Structure of the IEEE 802.3 LLDP extension MIB

Table 5–1 summarizes the particular object groups that are required for each operating mode. The implemented MIB shall comply with the MIB conformance section for the particular operating mode being supported.

**Table 5–1—IEEE 802.3 LLDP extension MIB object group conformance requirements**

MIB group	Rx mode	Tx mode	Tx/Rx mode
lldpV2Xdot3ConfigGroup	M <sup>a</sup>	M	M
lldpV2Xdot1LocSysGroup	M	—	M
lldpV2Xdot1RemSysGroup	—	M	M
ifGeneralInformationGroup	M	M	M

<sup>a</sup>M = Mandatory

Table 5–2 shows the structure of the MIB and the relationship of the MIB objects to the LLDP operational status/control variables, LLDP statistics variables, and TLV variables.

### 5.2 Relationship to other MIBs

Version 1 of the IEEE 802.3 LLDP extension MIB module is deprecated.

**Table 5–2—IEEE 802.3/LLDP extension MIB cross reference**

MIB table	MIB object	LLDP reference
<i>Configuration group</i>		
lldpV2Xdot3PortConfigTable		Augments lldpV2PortConfigEntry
	lldpV2Xdot3PortConfigTLVsTxEnable	Normal LLDPDUs
<i>Local devices information group</i>		
lldpV2Xdot3LocPortTable		
	lldpV2LocPortIfIndex	(Table index)
	lldpV2Xdot3LocPortAutoNegSupported	Auto-Negotiation support/status
	lldpV2Xdot3LocPortAutoNegEnabled	Auto-Negotiation support/status
	lldpV2Xdot3LocPortAutoNegAdvertisedCap	Auto-Negotiation advertised
	lldpV2Xdot3LocPortOperMauType	Operational MAU type
lldpV2Xdot3LocPowerTable		
	lldpV2LocPortIfIndex	(Table index)
	lldpV2Xdot3LocPowerPortClass	MDI power support
	lldpV2Xdot3LocPowerMDISupported	MDI power support
	lldpV2Xdot3LocPowerMDIEnabled	MDI power support
	lldpV2Xdot3LocPowerPairControlable	MDI power support
	lldpV2Xdot3LocPowerPairs	PSE power pair
	lldpV2Xdot3LocPowerClass	Power class
lldpV2Xdot3LocMaxFrameSizeTable		
	lldpV2LocPortIfIndex	(Table index)
	lldpV2Xdot3LocMaxFrameSize	Maximum frame size
<i>Remote devices information group</i>		
lldpV2Xdot3RemPortTable		
	lldpV2RemTimeMark	(Table index)
	lldpV2RemLocalIfIndex	(Table index)
	lldpV2RemLocalDestMACAddress	(Table index)
	lldpV2RemIndex	(Table index)
	lldpV2Xdot3RemPortAutoNegSupported	Auto-Negotiation support/status
	lldpV2Xdot3RemPortAutoNegEnabled	Auto-Negotiation support/status
	lldpV2Xdot3RemPortAutoNegAdvertisedCap	Auto-Negotiation advertised
	lldpV2Xdot3RemPortOperMauType	Operational MAU type

**Table 5–2—IEEE 802.3/LLDP extension MIB cross reference (continued)**

MIB table	MIB object	LLDP reference
lldpV2Xdot3RemPowerTable		
	lldpV2RemTimeMark	(Table index)
	lldpV2RemLocalIfIndex	(Table index)
	lldpV2RemLocalDestMACAddress	(Table index)
	lldpV2RemIndex	(Table index)
	lldpV2Xdot3RemPowerPortClass	MDI power support
	lldpV2Xdot3RemPowerMDISupported	MDI power support
	lldpV2Xdot3RemPowerMDIEnabled	MDI power support
	lldpV2Xdot3RemPowerPairControlable	MDI power support
	lldpV2Xdot3RemPowerPairs	PSE power pair
	lldpV2Xdot3RemPowerClass	Power class
lldpV2Xdot3RemMaxFrameSizeTable		
	lldpV2RemTimeMark	(Table index)
	lldpV2RemLocalIfIndex	(Table index)
	lldpV2RemLocalDestMACAddress	(Table index)
	lldpV2RemIndex	(Table index)
	lldpV2Xdot3RemMaxFrameSize	Maximum frame size

### 5.3 Security considerations for IEEE 802.3 LLDP extension MIB module

There are a number of management objects defined in this MIB module with a MAX-ACCESS clause of read-write.<sup>9</sup> Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations.

Setting the object, `lldpXdot3PortConfigTLVsTxEnable`, to incorrect values can result in improper operation of LLDP.

The following readable objects in this MIB module may be considered to be sensitive or vulnerable in some network environments:

- a) Objects that are associated with the transmit mode are as follows:
  - 1) `lldpV2Xdot3LocPortAutoNegSupported`
  - 2) `lldpV2Xdot3LocPortAutoNegEnabled`
  - 3) `lldpV2Xdot3LocPortAutoNegAdvertisedCap`
  - 4) `lldpV2Xdot3LocPortOperMauType`
  - 5) `lldpV2Xdot3LocPowerPortClass`
  - 6) `lldpV2Xdot3LocPowerMDISupported`
  - 7) `lldpV2Xdot3LocPowerMDIEnabled`
  - 8) `lldpV2Xdot3LocPowerPairControlable`
  - 9) `lldpV2Xdot3LocPowerPairs`
  - 10) `lldpV2Xdot3LocPowerClass`
  - 11) `lldpV2Xdot3LocMaxFrameSize`
- b) Objects that are associated with the receive mode are as follows:
  - 1) `lldpV2Xdot3RemPortAutoNegSupported`
  - 2) `lldpV2Xdot3RemPortAutoNegEnabled`
  - 3) `lldpV2Xdot3RemPortAutoNegAdvertisedCap`
  - 4) `lldpV2Xdot3RemPortOperMauType`
  - 5) `lldpV2Xdot3RemPowerPortClass`
  - 6) `lldpV2Xdot3RemPowerMDISupported`
  - 7) `lldpV2Xdot3RemPowerMDIEnabled`
  - 8) `lldpV2Xdot3RemPowerPairControlable`
  - 9) `lldpV2Xdot3RemPowerPairs`
  - 10) `lldpV2Xdot3RemPowerClass`
  - 11) `lldpV2Xdot3RemMaxFrameSize`

This concern applies both to objects that describe the configuration of the local host, as well as for objects that describe information from the remote hosts, acquired via LLDP and displayed by the objects in this MIB module. It is thus also important to control GET and/or NOTIFY access to these objects and possibly to encrypt the values of these objects when sending them over the network via SNMP.

<sup>9</sup>In IETF MIB definitions, the MAX-ACCESS clause defines the type of access that is allowed for particular data elements in the MIB. An explanation of the MAX-ACCESS mapping is given in section 7.3 of IETF STD 58, RFC 2578.

## 5.4 MIB module definition

In the following MIB definition, should any discrepancy between the DESCRIPTION text and the corresponding definition in 5.2 through 5.3 of this clause occur, the definitions in 5.2 through 5.3 shall take precedence.

An ASCII text version of the MIB definition can be found at the following URL:<sup>10</sup>

[http://www.ieee802.org/3/be/public/mib\\_modules/20110202/802dot3dot1C5mib.txt](http://www.ieee802.org/3/be/public/mib_modules/20110202/802dot3dot1C5mib.txt)

Two additional modules must be imported when compiling the IEEE 802.3 LLDP extension MIB module, and they can be found at the following URLs:

<http://www.ieee802.org/1/files/public/MIBs/LLDP-V2-MIB-200906080000Z.txt>

<http://www.ieee802.org/1/files/public/MIBs/LLDP-V2-TC-MIB-200906080000Z.txt>

---

<sup>10</sup>Copyright release for MIB modules: Users of this standard may freely reproduce the MIB module contained in this subclause so that it can be used for its intended purpose.



```

IEEE8023-DOT3-LLDP-EXT-V2-MIB DEFINITIONS ::= BEGIN

IMPORTS
    MODULE-IDENTITY,
    OBJECT-TYPE,
    Unsigned32,
    org
        FROM SNMPv2-SMI
    TruthValue
        FROM SNMPv2-TC
    MODULE-COMPLIANCE,
    OBJECT-GROUP
        FROM SNMPv2-CONF
    ifGeneralInformationGroup
        FROM IF-MIB
    lldpV2Extensions,
    lldpV2LocPortIfIndex,
    lldpV2RemTimeMark,
    lldpV2RemLocalIfIndex,
    lldpV2RemLocalDestMACAddress,
    lldpV2RemIndex,
    lldpV2PortConfigEntry
        FROM LLDP-V2-MIB
-- http://www.ieee802.org/1/files/public/MIBs/LLDP-V2-MIB-200906080000Z.txt
    LldpV2PowerPortClass
        FROM LLDP-V2-TC-MIB
-- http://www.ieee802.org/1/files/public/MIBs/LLDP-V2-TC-MIB-200906080000Z.txt
;

ieee8023lldpV2Xdot3MIB MODULE-IDENTITY
    LAST-UPDATED "201102020000Z" -- February 2, 2011
    ORGANIZATION "IEEE 802.3 Working Group"
    CONTACT-INFO
        "WG-URL: http://www.ieee802.org/3/index.html
        WG-EMail: STDS-802-3-MIB@LISTSERV.IEEE.ORG

        Contact: Howard Frazier
        Postal: 3151 Zanker Road
                San Jose, CA 95134
                USA
        Tel: +1.408.922.8164
        E-mail: hfrazier@broadcom.com"
    DESCRIPTION
        "The LLDP Management Information Base extension module for
        IEEE 802.3 organizationally defined discovery information.

        In order to assure the uniqueness of the LLDP-MIB,
        ieee8023lldpV2Xdot3MIB is branched from lldpV2Extensions using
        OUI/'company_id' is a 24-bit
        globally unique assigned number referenced by various standards."

    REVISION "201102020000Z" -- February 2, 2011

    DESCRIPTION
        "This revision incorporated changes to the MIB to
        support the use of LLDP with multiple destination MAC
        addresses, and to deprecate the Link Aggregation TLV
        (now moved to the 802.1 extension MIB)."
```

```

 ::= { org ieee(111)
       standards-association-numbers-series-standards(2)
       lan-man-stds(802)ieee802dot3(3) ieee802dot3dot1mibs(1) 5 }

-----
-----
--
-- Organizationaly Defined Information Extension - IEEE 802.3
--
-----
-----

lldpV2Xdot3Objects    OBJECT IDENTIFIER ::= { ieee8023lldpV2Xdot3MIB 1 }

-- LLDP IEEE 802.3 extension MIB groups
lldpV2Xdot3Config    OBJECT IDENTIFIER ::= { lldpV2Xdot3Objects 1 }
lldpV2Xdot3LocalData OBJECT IDENTIFIER ::= { lldpV2Xdot3Objects 2 }
lldpV2Xdot3RemoteData OBJECT IDENTIFIER ::= { lldpV2Xdot3Objects 3 }

-----
-----

-- IEEE 802.3 - Configuration
-----
-----

--
-- Version 2 of lldpV2Xdot3PortConfigTable
-- supports use of multiple destination MAC addresses
--

lldpV2Xdot3PortConfigTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot3PortConfigEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table that controls selection of LLDP TLVs to be transmitted
         on individual ports."
    ::= { lldpV2Xdot3Config 1 }

lldpV2Xdot3PortConfigEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot3PortConfigEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "LLDP configuration information that controls the
         transmission of IEEE 802.3 organizationally defined TLVs on
         LLDP transmission capable ports.

        This configuration object augments the lldpV2PortConfigEntry of
        the LLDP-MIB, therefore it is only present along with the port
        configuration defined by the associated lldpV2PortConfigEntry
        entry.

        Each active lldpV2Xdot3PortConfigEntry is restored from non-volatile
        storage (along with the corresponding lldpV2PortConfigEntry)
        after a re-initialization of the management system."

```

```

AUGMENTS { lldpV2PortConfigEntry }
 ::= { lldpV2Xdot3PortConfigTable 1 }

LldpV2Xdot3PortConfigEntry ::= SEQUENCE {
    lldpV2Xdot3PortConfigTLVsTxEnable BITS
}

lldpV2Xdot3PortConfigTLVsTxEnable OBJECT-TYPE
    SYNTAX      BITS {
        macPhyConfigStatus(0),
        powerViaMDI(1),
        unused(2), --avoids re-use of the old link agg bit number
        maxFrameSize(3)
    }
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The lldpV2Xdot3PortConfigTLVsTxEnable, defined as a bitmap,
        includes the IEEE 802.3 organizationally defined set of LLDP
        TLVs whose transmission is allowed by the local LLDP agent by
        the network management. Each bit in the bitmap corresponds
        to an IEEE 802.3 subtype associated with a specific IEEE
        802.3 optional TLV. The bit 0 is not used since there is
        no corresponding subtype.

        The bit 'macPhyConfigStatus(0)' indicates that the LLDP agent
        should transmit 'MAC/PHY configuration/status TLV'.

        The bit 'powerViaMDI(1)' indicates that the LLDP agent should
        transmit 'Power via MDI TLV'.

        The bit 'unused(2)' is no longer used; this was used for
        the 'Link Aggregation TLV' in the previous version.

        The bit 'maxFrameSize(3)' indicates that the LLDP agent should
        transmit 'Maximum-frame-size TLV'.

        The default value for lldpV2Xdot3PortConfigTLVsTxEnable object
        is an empty set, which means no enumerated values are set.

        The value of this object is restored from non-volatile
        storage after a re-initialization of the management system."
    REFERENCE
        "IEEE Std 802.3 30.12.1.1.1"
    DEFVAL      { { } }
 ::= { lldpV2Xdot3PortConfigEntry 1 }

```

```

-----
-- IEEE 802.3 - Local Device Information
-----

```

```

---
--- lldpV2Xdot3LocPortTable: Ethernet Port AutoNeg/Speed/Duplex
---                               Information Table
--- V2 modified to be indexed by ifIndex.
---

```

```

lldpV2Xdot3LocPortTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot3LocPortEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one row per port of Ethernet port
        information (as a part of the LLDP 802.3 organizational
        extension) on the local system known to this agent."
    ::= { lldpV2Xdot3LocalData 1 }

lldpV2Xdot3LocPortEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot3LocPortEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Information about a particular port component."
    INDEX       { lldpV2LocPortIfIndex }
    ::= { lldpV2Xdot3LocPortTable 1 }

LldpV2Xdot3LocPortEntry ::= SEQUENCE {
    lldpV2Xdot3LocPortAutoNegSupported      TruthValue,
    lldpV2Xdot3LocPortAutoNegEnabled        TruthValue,
    lldpV2Xdot3LocPortAutoNegAdvertisedCap OCTET STRING,
    lldpV2Xdot3LocPortOperMauType           Unsigned32
}

lldpV2Xdot3LocPortAutoNegSupported OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The truth value used to indicate whether the given port
        (associated with the local system) supports Auto-negotiation."
    REFERENCE
        "IEEE Std 802.3 30.12.2.1.1"
    ::= { lldpV2Xdot3LocPortEntry 1 }

lldpV2Xdot3LocPortAutoNegEnabled OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The truth value used to indicate whether port
        Auto-negotiation is enabled on the given port associated
        with the local system."
    REFERENCE
        "IEEE Std 802.3 30.12.2.1.2"
    ::= { lldpV2Xdot3LocPortEntry 2 }

lldpV2Xdot3LocPortAutoNegAdvertisedCap OBJECT-TYPE
    SYNTAX      OCTET STRING(SIZE(2))
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object contains the value (bitmap) of the
        ifMauAutoNegCapAdvertisedBits object (defined in IETF RFC
        3636) which is associated with the given port on the
        local system."
    REFERENCE

```

```

        "IEEE Std 802.3 30.12.2.1.3"
 ::= { lldpV2Xdot3LocPortEntry 3 }

lldpV2Xdot3LocPortOperMauType OBJECT-TYPE
    SYNTAX      Unsigned32(0..2147483647)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "An integer value that indicates the operational MAU type
        of the given port on the local system.

        This object contains the integer value derived from the
        list position of the corresponding dot3MauType as listed
        in Clause 13 and is equal to the last number in the
        respective dot3MauType OID.

        For example, if the ifMauType object is dot3MauType1000BaseTHD
        which corresponds to {dot3MauType 29}, the numerical value of
        this field is 29. For MAU types not listed in Clause 13,
        the value of this field shall be set to zero."
    REFERENCE
        "IEEE Std 802.3 30.12.2.1.4"
 ::= { lldpV2Xdot3LocPortEntry 4 }

---
---
--- lldpV2Xdot3LocPowerTable: Power Ethernet Information Table
--- V2 modified to be indexed by ifIndex.
---
---

lldpV2Xdot3LocPowerTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot3LocPowerEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains one row per port of power ethernet
        information (as a part of the LLDP 802.3 organizational
        extension) on the local system known to this agent."
 ::= { lldpV2Xdot3LocalData 2 }

lldpV2Xdot3LocPowerEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot3LocPowerEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Information about a particular port component."
    INDEX      { lldpV2LocPortIfIndex }
 ::= { lldpV2Xdot3LocPowerTable 1 }

LldpV2Xdot3LocPowerEntry ::= SEQUENCE {
    lldpV2Xdot3LocPowerPortClass      LldpV2PowerPortClass,
    lldpV2Xdot3LocPowerMDISupported  TruthValue,
    lldpV2Xdot3LocPowerMDIEnabled    TruthValue,
    lldpV2Xdot3LocPowerPairControlable TruthValue,
    lldpV2Xdot3LocPowerPairs         Unsigned32,
    lldpV2Xdot3LocPowerClass         Unsigned32
}

```

```
}

```

```
lldpV2Xdot3LocPowerPortClass OBJECT-TYPE

```

```
SYNTAX      LldpV2PowerPortClass

```

```
MAX-ACCESS  read-only

```

```
STATUS      current

```

```
DESCRIPTION

```

```
    "The value that identifies the port Class of the given port
    associated with the local system."

```

```
REFERENCE

```

```
    "IEEE Std 802.3 30.12.2.1.5"

```

```
::= { lldpV2Xdot3LocPowerEntry 1 }

```

```
lldpV2Xdot3LocPowerMDISupported OBJECT-TYPE

```

```
SYNTAX      TruthValue

```

```
MAX-ACCESS  read-only

```

```
STATUS      current

```

```
DESCRIPTION

```

```
    "The truth value used to indicate whether the MDI power is
    supported on the given port associated with the local system."

```

```
REFERENCE

```

```
    "IEEE Std 802.3 30.12.2.1.6"

```

```
::= { lldpV2Xdot3LocPowerEntry 2 }

```

```
lldpV2Xdot3LocPowerMDIEnabled OBJECT-TYPE

```

```
SYNTAX      TruthValue

```

```
MAX-ACCESS  read-only

```

```
STATUS      current

```

```
DESCRIPTION

```

```
    "The truth value used to identify whether MDI power is
    enabled on the given port associated with the local system."

```

```
REFERENCE

```

```
    "IEEE Std 802.3 30.12.2.1.7"

```

```
::= { lldpV2Xdot3LocPowerEntry 3 }

```

```
lldpV2Xdot3LocPowerPairControlable OBJECT-TYPE

```

```
SYNTAX      TruthValue

```

```
MAX-ACCESS  read-only

```

```
STATUS      current

```

```
DESCRIPTION

```

```
    "The truth value is derived from the value of
    pethPsePortPowerPairsControlAbility object (defined in IETF
    RFC 3621) and is used to indicate whether the pair selection
    can be controlled on the given port associated with the
    local system."

```

```
REFERENCE

```

```
    "IEEE Std 802.3 30.12.2.1.8"

```

```
::= { lldpV2Xdot3LocPowerEntry 4 }

```

```
lldpV2Xdot3LocPowerPairs OBJECT-TYPE

```

```
SYNTAX      Unsigned32(1|2)

```

```
MAX-ACCESS  read-only

```

```
STATUS      current

```

```
DESCRIPTION

```

```
    "This object contains the value of the pethPsePortPowerPairs
    object (defined in IETF RFC 3621) which is associated with
    the given port on the local system."

```

```
REFERENCE

```

```

        "IEEE Std 802.3 30.12.2.1.9"
 ::= { lldpV2Xdot3LocPowerEntry 5 }

lldpV2Xdot3LocPowerClass OBJECT-TYPE
SYNTAX      Unsigned32(1|2|3|4|5)
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object contains the value of the
    pethPsePortPowerClassifications object (defined in IETF
    RFC 3621) which is associated with the given port on the
    local system."
REFERENCE
    "IEEE Std 802.3 30.12.2.1.10"
 ::= { lldpV2Xdot3LocPowerEntry 6 }

---
---
--- lldpV2Xdot3LocMaxFrameSizeTable: Maximum Frame Size information
--- V2 modified to be indexed by ifIndex.
---
---
lldpV2Xdot3LocMaxFrameSizeTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpV2Xdot3LocMaxFrameSizeEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one row per port of maximum frame
    size information (as a part of the LLDP 802.3 organizational
    extension) on the local system known to this agent."
 ::= { lldpV2Xdot3LocalData 3 }

lldpV2Xdot3LocMaxFrameSizeEntry OBJECT-TYPE
SYNTAX      LldpV2Xdot3LocMaxFrameSizeEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Maximum Frame Size information about a particular port
    component."
INDEX       { lldpV2LocPortIfIndex }
 ::= { lldpV2Xdot3LocMaxFrameSizeTable 1 }

LldpV2Xdot3LocMaxFrameSizeEntry ::= SEQUENCE {
    lldpV2Xdot3LocMaxFrameSize      Unsigned32
}

lldpV2Xdot3LocMaxFrameSize OBJECT-TYPE
SYNTAX      Unsigned32(0..65535)
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "An integer value indicating the maximum supported frame
    size in octets on the given port of the local system."
REFERENCE
    "IEEE Std 802.3 30.12.2.1.13"
 ::= { lldpV2Xdot3LocMaxFrameSizeEntry 1 }

```

```

-----
-- IEEE 802.3 - Remote Devices Information
-----

---
---
--- lldpV2Xdot3RemPortTable: Ethernet Information Table
--- V2 modified to be indexed by ifIndex and destination MAC address.
---
---

lldpV2Xdot3RemPortTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF LldpV2Xdot3RemPortEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table contains Ethernet port information (as a part
         of the LLDP 802.3 organizational extension) of the remote
         system."
    ::= { lldpV2Xdot3RemoteData 1 }

lldpV2Xdot3RemPortEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot3RemPortEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Information about a particular physical network connection."
    INDEX      { lldpV2RemTimeMark,
                 lldpV2RemLocalIfIndex,
                 lldpV2RemLocalDestMACAddress,
                 lldpV2RemIndex }
    ::= { lldpV2Xdot3RemPortTable 1 }

LldpV2Xdot3RemPortEntry ::= SEQUENCE {
    lldpV2Xdot3RemPortAutoNegSupported      TruthValue,
    lldpV2Xdot3RemPortAutoNegEnabled       TruthValue,
    lldpV2Xdot3RemPortAutoNegAdvertisedCap OCTET STRING,
    lldpV2Xdot3RemPortOperMauType          Unsigned32
}

lldpV2Xdot3RemPortAutoNegSupported OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The truth value used to indicate whether the given port
         (associated with remote system) supports Auto-negotiation."
    REFERENCE
        "IEEE Std 802.3 30.12.3.1.1"
    ::= { lldpV2Xdot3RemPortEntry 1 }

lldpV2Xdot3RemPortAutoNegEnabled OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION

```

```

        "The truth value used to indicate whether port
        Auto-negotiation is enabled on the given port associated
        with the remote system."
REFERENCE
    "IEEE Std 802.3 30.12.3.1.2"
 ::= { lldpV2Xdot3RemPortEntry 2 }

lldpV2Xdot3RemPortAutoNegAdvertisedCap OBJECT-TYPE
SYNTAX      OCTET STRING(SIZE(2))
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object contains the value (bitmap) of the
    ifMauAutoNegCapAdvertisedBits object (defined in IETF RFC
    3636) which is associated with the given port on the
    remote system."
REFERENCE
    "IEEE Std 802.3 30.12.3.1.3"
 ::= { lldpV2Xdot3RemPortEntry 3 }

lldpV2Xdot3RemPortOperMauType OBJECT-TYPE
SYNTAX      Unsigned32(0..2147483647)
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "An integer value that indicates the operational MAU type
    of the sending device.

    This object contains the integer value derived from the
    list position of the corresponding dot3MauType as listed in
    in Clause 13 and is equal to the last number in
    the respective dot3MauType OID.

    For example, if the ifMauType object is dot3MauType1000BaseTHD
    which corresponds to {dot3MauType 29}, the numerical value of
    this field is 29. For MAU types not listed in Clause 13,
    the value of this field shall be set to zero."
REFERENCE
    "IEEE Std 802.3 30.12.3.1.4"
 ::= { lldpV2Xdot3RemPortEntry 4 }

---
---
--- lldpV2Xdot3RemPowerTable: Power Ethernet Information Table
--- V2 modified to be indexed by ifIndex and destination MAC address.
---
---

lldpV2Xdot3RemPowerTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpV2Xdot3RemPowerEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains Ethernet power information (as a part
    of the LLDP 802.3 organizational extension) of the remote
    system."
 ::= { lldpV2Xdot3RemoteData 2 }

```

```

lldpV2Xdot3RemPowerEntry OBJECT-TYPE
    SYNTAX      LldpV2Xdot3RemPowerEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Information about a particular physical network connection."
    INDEX       { lldpV2RemTimeMark,
                  lldpV2RemLocalIfIndex,
                  lldpV2RemLocalDestMACAddress,
                  lldpV2RemIndex }
    ::= { lldpV2Xdot3RemPowerTable 1 }

LldpV2Xdot3RemPowerEntry ::= SEQUENCE {
    lldpV2Xdot3RemPowerPortClass      LldpV2PowerPortClass,
    lldpV2Xdot3RemPowerMDISupported   TruthValue,
    lldpV2Xdot3RemPowerMDIEnabled     TruthValue,
    lldpV2Xdot3RemPowerPairControlable TruthValue,
    lldpV2Xdot3RemPowerPairs          Unsigned32,
    lldpV2Xdot3RemPowerClass          Unsigned32
}

lldpV2Xdot3RemPowerPortClass OBJECT-TYPE
    SYNTAX      LldpV2PowerPortClass
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The value that identifies the port Class of the given port
        associated with the remote system."
    REFERENCE
        "IEEE Std 802.3 30.12.3.1.5"
    ::= { lldpV2Xdot3RemPowerEntry 1 }

lldpV2Xdot3RemPowerMDISupported OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The truth value used to indicate whether the MDI power
        is supported on the given port associated with the remote
        system."
    REFERENCE
        "IEEE Std 802.3 30.12.3.1.6"
    ::= { lldpV2Xdot3RemPowerEntry 2 }

lldpV2Xdot3RemPowerMDIEnabled OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The truth value used to identify whether MDI power is
        enabled on the given port associated with the remote system."
    REFERENCE
        "IEEE Std 802.3 30.12.3.1.7"
    ::= { lldpV2Xdot3RemPowerEntry 3 }

lldpV2Xdot3RemPowerPairControlable OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only

```

```

STATUS      current
DESCRIPTION
    "The truth value is derived from the value of
    pethPsePortPowerPairsControlAbility object (defined in IETF
    RFC 3621) and is used to indicate whether the pair selection
    can be controlled on the given port associated with the
    remote system."
REFERENCE
    "IEEE Std 802.3 30.12.3.1.8"
 ::= { lldpV2Xdot3RemPowerEntry 4 }

lldpV2Xdot3RemPowerPairs OBJECT-TYPE
SYNTAX      Unsigned32(1|2)
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object contains the value of the pethPsePortPowerPairs
    object (defined in IETF RFC 3621) which is associated with
    the given port on the remote system."
REFERENCE
    "IEEE Std 802.3 30.12.3.1.9"
 ::= { lldpV2Xdot3RemPowerEntry 5 }

lldpV2Xdot3RemPowerClass OBJECT-TYPE
SYNTAX      Unsigned32(1|2|3|4|5)
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This object contains the value of the
    pethPsePortPowerClassifications object (defined in IETF
    RFC 3621) which is associated with the given port on the
    remote system."
REFERENCE
    "IEEE Std 802.3 30.12.3.1.10"
 ::= { lldpV2Xdot3RemPowerEntry 6 }

---
--- lldpV2Xdot3RemMaxFrameSizeTable: Maximum Frame Size information
--- V2 modified to be indexed by ifIndex and destination MAC address.
---
---

lldpV2Xdot3RemMaxFrameSizeTable OBJECT-TYPE
SYNTAX      SEQUENCE OF LldpV2Xdot3RemMaxFrameSizeEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains one row per port/destination
    address pair of maximum frame
    size information (as a part of the LLDP IEEE 802.3
    organizational extension) of the remote system."
 ::= { lldpV2Xdot3RemoteData 3 }

lldpV2Xdot3RemMaxFrameSizeEntry OBJECT-TYPE
SYNTAX      LldpV2Xdot3RemMaxFrameSizeEntry
MAX-ACCESS  not-accessible
STATUS      current

```

```

DESCRIPTION
    "Maximum Frame Size information about a particular port
    component."
INDEX    { lldpV2RemTimeMark,
           lldpV2RemLocalIfIndex,
           lldpV2RemLocalDestMACAddress,
           lldpV2RemIndex }
 ::= { lldpV2Xdot3RemMaxFrameSizeTable 1 }

lldpV2Xdot3RemMaxFrameSizeEntry ::= SEQUENCE {
    lldpV2Xdot3RemMaxFrameSize  Unsigned32
}

lldpV2Xdot3RemMaxFrameSize OBJECT-TYPE
    SYNTAX      Unsigned32(0..65535)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "An integer value indicating the maximum supported frame
        size in octets on the port component associated with the
        remote system."
    REFERENCE
        "IEEE Std 802.3 30.12.3.1.13"
    ::= { lldpV2Xdot3RemMaxFrameSizeEntry 1 }

-----
-- Conformance statements
-----
lldpV2Xdot3Conformance OBJECT IDENTIFIER ::= { ieee8023lldpV2Xdot3MIB 2 }
lldpV2Xdot3Compliances OBJECT IDENTIFIER ::= { lldpV2Xdot3Conformance 1 }
lldpV2Xdot3Groups      OBJECT IDENTIFIER ::= { lldpV2Xdot3Conformance 2 }

-- Compliance statements

lldpV2Xdot3TxRxCompliance MODULE-COMPLIANCE
    STATUS      current
    DESCRIPTION
        "A compliance statement for SNMP entities that implement
        the LLDP 802.3 organizational extension MIB.

        This group is mandatory for all agents that implement the
        LLDP 802.3 organizational extension in TX and/or RX mode.

        This version defines compliance requirements for
        V2 of the LLDP MIB."
    MODULE -- this module
        MANDATORY-GROUPS { lldpV2Xdot3ConfigGroup,
                           ifGeneralInformationGroup
        }
    ::= { lldpV2Xdot3Compliances 1 }

lldpV2Xdot3TxCompliance MODULE-COMPLIANCE
    STATUS      current
    DESCRIPTION
        "The compliance statement for SNMP entities which implement
        the LLDP 802.3 organizational extension MIB.

```

This group is mandatory for agents which implement the LLDP 802.3 organizational extension in the TX mode.

This version defines compliance requirements for V2 of the LLDP MIB."

```
MODULE -- this module
    MANDATORY-GROUPS { lldpV2Xdot3LocSysGroup }
 ::= { lldpV2Xdot3Compliances 2 }
```

```
lldpV2Xdot3RxCompliance MODULE-COMPLIANCE
```

```
STATUS current
```

```
DESCRIPTION
```

"The compliance statement for SNMP entities which implement the LLDP 802.3 organizational extension MIB.

This group is mandatory for agents which implement the LLDP 802.3 organizational extension in the RX mode.

This version defines compliance requirements for V2 of the LLDP MIB."

```
MODULE -- this module
    MANDATORY-GROUPS { lldpV2Xdot3RemSysGroup }
 ::= { lldpV2Xdot3Compliances 3 }
```

```
-- MIB groupings
```

```
lldpV2Xdot3ConfigGroup OBJECT-GROUP
```

```
OBJECTS {
```

```
    lldpV2Xdot3PortConfigTLVsTxEnable
```

```
}
```

```
STATUS current
```

```
DESCRIPTION
```

"The collection of objects which are used to configure the LLDP 802.3 organizational extension implementation behavior. "

```
::= { lldpV2Xdot3Groups 1 }
```

```
lldpV2Xdot3LocSysGroup OBJECT-GROUP
```

```
OBJECTS {
```

```
    lldpV2Xdot3LocPortAutoNegSupported,
    lldpV2Xdot3LocPortAutoNegEnabled,
    lldpV2Xdot3LocPortAutoNegAdvertisedCap,
    lldpV2Xdot3LocPortOperMauType,
    lldpV2Xdot3LocPowerPortClass,
    lldpV2Xdot3LocPowerMDISupported,
    lldpV2Xdot3LocPowerMDIEnabled,
    lldpV2Xdot3LocPowerPairControlable,
    lldpV2Xdot3LocPowerPairs,
    lldpV2Xdot3LocPowerClass,
    lldpV2Xdot3LocMaxFrameSize
```

```
}
```

```
STATUS current
```

```
DESCRIPTION
```

"The collection of objects which are used to represent LLDP 802.3 organizational extension Local Device Information."

```
::= { lldpV2Xdot3Groups 2 }
```

```
lldpV2Xdot3RemSysGroup OBJECT-GROUP
```

```
OBJECTS {
  lldpV2Xdot3RemPortAutoNegSupported,
  lldpV2Xdot3RemPortAutoNegEnabled,
  lldpV2Xdot3RemPortAutoNegAdvertisedCap,
  lldpV2Xdot3RemPortOperMauType,
  lldpV2Xdot3RemPowerPortClass,
  lldpV2Xdot3RemPowerMDISupported,
  lldpV2Xdot3RemPowerMDIEnabled,
  lldpV2Xdot3RemPowerPairControlable,
  lldpV2Xdot3RemPowerPairs,
  lldpV2Xdot3RemPowerClass,
  lldpV2Xdot3RemMaxFrameSize
}
STATUS current
DESCRIPTION
  "The collection of objects which are used to represent LLDP
  802.3 organizational extension Local Device Information."
 ::= { lldpV2Xdot3Groups 3 }
```

END

## 6. Ethernet operations, administration, and maintenance (OAM) MIB module

### 6.1 Introduction

The IEEE 802.3ah Ethernet in the First Mile (EFM) Task Force added management capabilities to Ethernet-like interfaces to provide some basic operations, administration and maintenance (OAM) functions. The defined functionality includes discovery, error signaling, loopback, and link monitoring.

This clause defines a MIB module for use with SNMP to manage these Ethernet-like interface capabilities.

### 6.2 Overview

Ethernet OAM is composed of a core set of functions and a set of optional functional groups as described in IEEE Std 802.3 Clause 57. The core functions include discovery operations (determining if the other end of the link is OAM capable and what OAM functions it supports), state machine implementation, and some critical event flows. The optional functional groups are for (a) link events, (b) remote loopback, and (c) variable retrieval and response. Each optional functional group is controlled by a separate MIB table(s).

Ethernet OAM is complementary with SNMP management in that it provides some basic management functions at layer 2, rather than using layer 3 and above as required by SNMP over an IP infrastructure. Ethernet OAM provides single-hop functionality in that it works only between two directly-connected Ethernet stations. SNMP can be used to manage the Ethernet OAM interactions of one Ethernet station with another.

Ethernet OAM has three functional objectives, which are detailed in the next three subclauses. The definition of a basic Ethernet OAM protocol data unit is given in 6.2.4.

#### 6.2.1 Remote fault indication

Remote fault indication provides a mechanism for one end of an Ethernet link to signal the other end that the receive path is non-operational. Some Ethernet physical layers offer mechanisms to signal this condition at the physical layer. Ethernet OAM added a mechanism so that some Ethernet physical layers can operate in unidirectional mode, allowing frames to be transmitted in one direction even when the other direction is non-operational. Traditionally, Ethernet PHYs do not allow frame transmission in one direction if the other direction is not operational. Using this mode, Ethernet OAM allows frame-based signaling of remote fault conditions while still not allowing higher-layer applications to be aware of the unidirectional capability. This clause includes mechanisms for capturing that fault information and reflecting such information in objects and notifications within the SNMP management framework.

#### 6.2.2 Link monitoring

Ethernet OAM includes event signaling capability so that one end of an Ethernet link can indicate the occurrence of certain important events to the other end of the link. This happens via layer 2 protocols. This clause defines methods for incorporating the occurrence of these layer 2 events, both at the local end and far end of the link, into the SNMP management framework.

Ethernet OAM also includes mechanisms for one Ethernet station to query another directly connected Ethernet station about the status of its Ethernet interface variables and status. This clause does not include mechanisms for controlling how one Ethernet endpoint may use this functionality to query the status or statistics of a peer Ethernet entity.

### 6.2.3 Remote loopback

Remote loopback is a link state where the peer Ethernet entity echoes every received packet (without modifications) back onto the link. Remote loopback is intrusive in that the other end of the link is not forwarding traffic from higher layers out over the link. This clause defines objects controlling loopback operation and reading the status of the loopback state.

### 6.2.4 Ethernet OAM protocol data units

An Ethernet OAM protocol data unit is a valid Ethernet frame with a destination Media Access Control (MAC) address equal to the reserved MAC address for Slow Protocols (see Annex 57A of IEEE Std 802.3), a lengthOrType field equal to the reserved type for Slow Protocols, and a Slow Protocols subtype equal to that of the subtype reserved for Ethernet OAM.

OAMPDU is used throughout this clause as an abbreviation for Ethernet OAM protocol data unit. OAMPDUs are the mechanism by which two directly connected Ethernet interfaces exchange OAM information.

## 6.3 Relation to other MIB modules

The definitions presented here are based on Clause 30 and Clause 57 of IEEE Std 802.3. Note that these clauses describe many of these variables and their effects on the MAC sublayer. In some cases, there is a one-to-one relationship between an object in this clause and an object in the Clause 30 MIB. In other cases, the objects of this clause reflect a more complex entity and are reflected by more than one object in the Clause 30 MIB.

The objects defined in this clause manage OAM functionality introduced as part of the 802.3ah project. These objects do not overlap with the Interfaces Group MIB module defined in IETF RFC 2863, the Ethernet-like interface MIB module defined in Clause 10, or any other MIB module currently used to manage various aspects of an Ethernet interface. The objects defined here are defined for Ethernet-like interfaces only and use the same ifIndex as the associated Ethernet interface. Ethernet OAM can be implemented on any Ethernet-like interface.

### 6.3.1 Relation to other EFM MIB modules

The Ethernet OAM functionality and MIB module is independent of the other functionality and MIB modules derived from IEEE Std 802.3 for copper and EPON. Ethernet OAM may be implemented (or not) on the new EFM interface types, just as it can on any other Ethernet interface.

### 6.3.2 Mapping of IEEE 802.3 managed objects

Table 6–1 contains the mapping between managed objects defined in IEEE Std 802.3 Clause 30, and managed objects defined in this clause.

All IEEE 802.3 OAM managed objects are reflected in this MIB module.

**Table 6–1—Mapping between IEEE 802.3 managed objects and SNMP objects**

IEEE 802.3 managed object	Corresponding SNMP object
oOAM	
.aOAMID	IF-MIB ifIndex
.aOAMAdminState	dot3OamAdminState
.aOAMMode	dot3OamMode
.aOAMDiscoveryState	dot3OamOperStatus
.aOAMRemoteMACAddress	dot3OamPeerMacAddress
.aOAMLocalConfiguration	dot3OamFunctionsSupported
.aOAMRemoteConfiguration	dot3OamPeerFunctionsSupported, dot3OamPeerMode
.aOAMLocalPDUConfiguration	dot3OamMaxOamPduSize
.aOAMRemotePDUConfiguration	dot3OamPeerMaxOamPduSize
.aOAMLocalFlagsField	dot3OamOperStatus, dot3OamEventLogEntry
.aOAMRemoteFlagsField	dot3OamOperStatus, dot3OamEventLogEntry
.aOAMLocalRevision	dot3OamConfigRevision
.aOAMRemoteRevision	dot3OamPeerConfigRevision
.aOAMLocalState	dot3OamLoopbackStatus
.aOAMRemoteState	dot3OamLoopbackStatus
.aOAMRemoteVendorOUI	dot3OamPeerVendorOui
.aOAMRemoteVendorSpecificInfo	dot3OamPeerVendorInfo
.aOAMUnsupportedCodesTx	dot3OamUnsupportedCodesTx
.aOAMUnsupportedCodesRx	dot3OamUnsupportedCodesRx
.aOAMInformationTx	dot3OamInformationTx
.aOAMInformationRx	dot3OamInformationRx
.aOAMUniqueEventNotificationTx	dot3OamUniqueEventNotificationTx
.aOAMUniqueEventNotificationRx	dot3OamUniqueEventNotificationRx
.aOAMDuplicateEventNotificationTx	dot3OamDuplicateEventNotificationTx
.aOAMDuplicateEventNotificationRx	dot3OamDuplicateEventNotificationRx
.aOAMLoopbackControlTx	dot3OamLoopbackControlTx

**Table 6–1—Mapping between IEEE 802.3 managed objects and SNMP objects (continued)**

IEEE 802.3 managed object	Corresponding SNMP object
.aOAMLoopbackControlRx	dot3OamLoopbackControlRx
.aOAMVariableRequestTx	dot3OamVariableRequestTx
.aOAMVariableRequestRx	dot3OamVariableRequestRx
.aOAMVariableResponseTx	dot3OamVariableResponseTx
.aOAMVariableResponseRx	dot3OamVariableResponseRx
.aOAMOrganizationSpecificTx	dot3OamOrgSpecificTx
.aOAMOrganizationSpecificRx	dot3OamOrgSpecificTx
.aOAMLocalErrSymPeriodConfig	dot3OamErrSymPeriodWindow, dot3OamErrSymPeriodThreshold
.aOAMLocalErrSymPeriodEvent	dot3OamEventLogEntry
.aOAMLocalErrFrameConfig	dot3OamErrFrameWindow, dot3OamErrFrameThreshold
.aOAMLocalErrFrameEvent	dot3OamEventLogEntry
.aOAMLocalErrFramePeriodConfig	dot3OamErrFramePeriodWindow, dot3OamErrFramePeriodThreshold
.aOAMLocalErrFramePeriodEvent	dot3OamEventLogEntry
.aOAMLocalErrFrameSecsSummaryConfig	dot3OamErrFrameSecsSummaryWindow, dot3OamErrFrameSecsummaryThreshold
.aOAMLocalErrFrameSecsSummaryEvent	dot3OamEventLogEntry
.aOAMRemoteErrSymPeriodEvent	dot3OamEventLogEntry
.aOAMRemoteErrFrameEvent	dot3OamEventLogEntry
.aOAMRemoteErrFramePeriodEvent	dot3OamEventLogEntry
.aOAMRemoteErrFrameSecsSummaryEvent	dot3OamEventLogEntry
.aFramesLostDueToOamError	dot3OamFramesLostDueToOam
.acOAMAdminControl	dot3OamAdminState

## 6.4 MIB structure

The Ethernet OAM MIB objects of this clause focus on the OAM capabilities introduced in IEEE Std 802.3. The MIB objects are partitioned into six different MIB groups.

The dot3OamTable group manages the primary OAM objects of the Ethernet interface. This group controls the state and status of OAM as well as the mode in which it operates. The dot3OamPeerTable maintains the current information on the status and configuration of the peer OAM entity on the Ethernet interface. Managed information includes the capabilities and function available on the peer OAM entity.

The dot3OamLoopbackTable manages the loopback function introduced in IEEE Std 802.3. This table controls enabling and disabling loopback, as well as indicating the loopback status of Ethernet OAM on this interface.

The dot3OamStatsTable maintains statistics on the number and type of Ethernet OAM frames being transmitted and received on the Ethernet interface.

The dot3OamEventConfigTable defines the objects for managing the event notification capability available in Ethernet OAM. With Ethernet OAM, one device may send notifications to its peer devices whenever an important event happens on the local device. This table provides management of which events result in notifications via Ethernet OAM notifications and/or via SNMP notifications.

The dot3OamEventLogTable manages the current status of local and remote events detected via Ethernet OAM. This table is updated whenever local events are detected by Ethernet OAM or whenever Ethernet OAM Event Notifications are received from the peer OAM entity.

There are two notifications defined to report Ethernet OAM events (one for threshold crossing events, one for non-threshold crossing events). Both notifications are contained within the same conformance group.

## 6.5 Security considerations for Ethernet operations, administration, and maintenance (OAM) MIB module

The readable objects in this module can provide information about network traffic, and therefore may be considered sensitive. In particular, OAM provides mechanisms for reading the IEEE Std 802.3 Clause 30 MIB attributes from a link partner via a specialized layer two protocol. Unlike SNMP, IEEE 802.3 OAM does not include encryption or authentication mechanisms. It should not be used in environments where this interface information is considered sensitive, and where the facility terminations are unprotected. By default, OAM is disabled on Ethernet-like interfaces and is therefore not a risk.

IEEE 802.3 OAM is designed to support deployment in access and enterprise networks. In access networks, one end of a link is the CO-side, and the other is the CPE-side, and the facilities are often protected in wiring cages or closets. In such deployments, it is often the case that the CO-side is protected from access from the CPE-side. Within IEEE 802.3 OAM, this protection from remote access is accomplished by configuring the CPE-side in passive mode using the dot3OamMode attribute. This prevents the CPE from accessing functions and information at the CO-side of the connection. In enterprise networks, read-only interface information is often considered non-sensitive.

The frequency of OAM PDUs on an Ethernet interface does not adversely affect data traffic, as OAM is a slow protocol with very limited bandwidth potential, and it is not required for normal link operation. Although there are a number of objects in this module with read-write or read-create MAX-ACCESS, they have limited effects on user data.

The loopback capability of OAM can have potentially disruptive effects; when remote loopback is enabled, the remote station automatically transmits all received traffic back to the local station except for OAM traffic. This completely disrupts all higher layer protocols such as bridging, IP, and SNMP. Therefore, an attribute (`dot3OamLoopbackIgnoreRx`) was introduced to control whether the local station processes or ignores received loopback commands.

The administrative state and mode are also read-write objects. Disabling OAM can interrupt management activities between peer devices, potentially causing serious problems. Setting the `dot3OamMode` to an undesired value can allow access to Ethernet monitoring, events, and functions that may not be acceptable in a particular deployment scenario. In addition to loopback functionality, Ethernet interface statistics and events can be accessed via the OAM protocol, which may not be desired in some circumstances.

OAM event configuration also contains read-write objects. These objects control whether events are sent, and at what thresholds. Note that the frequency of event communication is limited by the frequency limits of Slow Protocols on Ethernet interfaces. Also, the information available via OAM events is also available via OAM Variable Requests. Access to this information via either OAM events or Variable Requests is controlled by the `dot3OamAdminState` and `dot3OamMode` objects. As mentioned previously, inadequate protection of these variables can result in access to link information and functions.

## 6.6 MIB module definition

An ASCII text version of the MIB definition can be found at the following URL:<sup>11</sup>

[http://www.ieee802.org/3/be/public/mib\\_modules/20110202/802dot3dot1C6mib.txt](http://www.ieee802.org/3/be/public/mib_modules/20110202/802dot3dot1C6mib.txt)

---

<sup>11</sup>Copyright release for MIB modules: Users of this standard may freely reproduce the MIB module contained in this subclause so that it can be used for its intended purpose.

```

IEEE8023-DOT3-OAM-MIB DEFINITIONS ::= BEGIN
IMPORTS
    MODULE-IDENTITY, OBJECT-TYPE, Counter32, Unsigned32,
        Integer32, NOTIFICATION-TYPE, org
    FROM SNMPv2-SMI
        -- from [RFC2578]
    TEXTUAL-CONVENTION, MacAddress, TimeStamp, TruthValue
    FROM SNMPv2-TC
        -- from [RFC2579]
    CounterBasedGauge64
    FROM HCNM-TC
        -- from [RFC2856]
    ifIndex
    FROM IF-MIB
        -- from [RFC2863]
    MODULE-COMPLIANCE, OBJECT-GROUP, NOTIFICATION-GROUP
    FROM SNMPv2-CONF;
        -- from [RFC2580]
ieee8023Dot3OamMIB MODULE-IDENTITY
    LAST-UPDATED "201102020000Z" -- February 2, 2011
    ORGANIZATION
        "IEEE 802.3 working group"
    CONTACT-INFO
        "WG-URL: http://www.ieee802.org/3/index.html
        WG-EMail: STDS-802-3-MIB@LISTSERV.IEEE.ORG

        Contact: Howard Frazier
        Postal: 3151 Zanker Road
                San Jose, CA 95134
                USA
        Tel:      +1.408.922.8164
        E-mail:   hfrazier@broadcom.com"
    DESCRIPTION
        "The MIB module for managing the new Ethernet OAM features
        introduced by the Ethernet in the First Mile Task Force (IEEE
        802.3ah). The functionality presented here is based on IEEE
        Std 802.3ah, released in October, 2004, which was prepared as
        an addendum to IEEE Std 802.3. Since then, IEEE Std 802.3ah
        has been merged into the base IEEE 802.3 standard.

        In particular, this MIB focuses on the new OAM functions
        introduced in Clause 57 of IEEE Std 802.3. The OAM functionality
        of Clause 57 is controlled by new management attributes
        introduced in Clause 30 of IEEE Std 802.3. The OAM functions are
        not specific to any particular Ethernet physical layer, and
        can be generically applied to any Ethernet interface.

        An Ethernet OAM protocol data unit is a valid Ethernet frame
        with a destination MAC address equal to the reserved MAC
        address for Slow Protocols (See 57A of IEEE Std 802.3), a
        lengthOrType field equal to the reserved type for Slow
        Protocols, and a Slow Protocols subtype equal to that of the
        subtype reserved for Ethernet OAM. OAMPDU is used throughout
        this document as an abbreviation for Ethernet OAM protocol
        data unit."

    REVISION      "201102020000Z" -- February 2, 2011
    DESCRIPTION    "Initial version, based on an earlier version in RFC 4878."

```

```

 ::= { org ieee(111)
       standards-association-numbers-series-standards(2)
       lan-man-stds(802) ieee802dot3(3) ieee802dot3dot1mibs(1) 6 }

--
-- Sections of the Ethernet OAM MIB
--
dot3OamNotifications OBJECT IDENTIFIER ::= { ieee8023Dot3OamMIB 0 }
dot3OamObjects       OBJECT IDENTIFIER ::= { ieee8023Dot3OamMIB 1 }
dot3OamConformance  OBJECT IDENTIFIER ::= { ieee8023Dot3OamMIB 2 }

--
-- Textual conventions for the OAM MIB
--
EightOTwoOui ::= TEXTUAL-CONVENTION
  DISPLAY-HINT "3x:"
  STATUS      current
  DESCRIPTION
    "24-bit Organizationally Unique Identifier. Information on
    OUIs can be found in IEEE 802-2001 [802-2001], Clause 9."
  SYNTAX      OCTET STRING(SIZE(3))

-- *****
--
-- Ethernet OAM Control group
--

dot3OamTable OBJECT-TYPE
  SYNTAX      SEQUENCE OF Dot3OamEntry
  MAX-ACCESS  not-accessible
  STATUS      current
  DESCRIPTION
    "This table contains the primary controls and status for the
    OAM capabilities of an Ethernet-like interface. There will be
    one row in this table for each Ethernet-like interface in the
    system that supports the OAM functions defined in IEEE Std 802.3."
  ::= { dot3OamObjects 1 }

dot3OamEntry OBJECT-TYPE
  SYNTAX      Dot3OamEntry
  MAX-ACCESS  not-accessible
  STATUS      current
  DESCRIPTION
    "An entry in the table that contains information on the
    Ethernet OAM function for a single Ethernet like interface.
    Entries in the table are created automatically for each
    interface supporting Ethernet OAM. The status of the row
    entry can be determined from dot3OamOperStatus.

    A dot3OamEntry is indexed in the dot3OamTable by the ifIndex
    object of the Interfaces Group MIB.
    "
  INDEX       { ifIndex }
  ::= { dot3OamTable 1 }

Dot3OamEntry ::=
  SEQUENCE {
    dot3OamAdminState      INTEGER,
    dot3OamOperStatus     INTEGER,

```

```

dot3OamMode                INTEGER,
dot3OamMaxOamPduSize       Unsigned32,
dot3OamConfigRevision      Unsigned32,
dot3OamFunctionsSupported  BITS
}

dot3OamAdminState OBJECT-TYPE
SYNTAX      INTEGER {
                enabled(1),
                disabled(2)
            }
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
    "This object is used to provision the default administrative
    OAM mode for this interface. This object represents the
    desired state of OAM for this interface.

    The dot3OamAdminState always starts in the disabled(2) state
    until an explicit management action or configuration
    information retained by the system causes a transition to the
    enabled(1) state. When enabled(1), Ethernet OAM will attempt
    to operate over this interface.
    "
REFERENCE   "IEEE Std 802.3, 30.3.6.1.2"
 ::= { dot3OamEntry 1 }

dot3OamOperStatus OBJECT-TYPE
SYNTAX      INTEGER {
                disabled(1),
                linkFault(2),
                passiveWait(3),
                activeSendLocal(4),
                sendLocalAndRemote(5),
                sendLocalAndRemoteOk(6),
                oamPeeringLocallyRejected(7),
                oamPeeringRemotelyRejected(8),
                operational(9),
                nonOperHalfDuplex(10)
            }
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "At initialization and failure conditions, two OAM entities on
    the same full-duplex Ethernet link begin a discovery phase to
    determine what OAM capabilities may be used on that link. The
    progress of this initialization is controlled by the OAM
    sublayer.

    This value is always disabled(1) if OAM is disabled on this
    interface via the dot3OamAdminState.

    If the link has detected a fault and is transmitting OAMPDUs
    with a link fault indication, the value is linkFault(2).
    Also, if the interface is not operational (ifOperStatus is
    not up(1)), linkFault(2) is returned. Note that the object
    ifOperStatus may not be up(1) as a result of link failure or
    administrative action (ifAdminState being down(2) or
    testing(3)).
    "

```

The `passiveWait(3)` state is returned only by OAM entities in passive mode (`dot3OamMode`) and reflects the state in which the OAM entity is waiting to see if the peer device is OAM capable. The `activeSendLocal(4)` value is used by active mode devices (`dot3OamMode`) and reflects the OAM entity actively trying to discover whether the peer has OAM capability but has not yet made that determination.

The state `sendLocalAndRemote(5)` reflects that the local OAM entity has discovered the peer but has not yet accepted or rejected the configuration of the peer. The local device can, for whatever reason, decide that the peer device is unacceptable and decline OAM peering. If the local OAM entity rejects the peer OAM entity, the state becomes `oamPeeringLocallyRejected(7)`. If the OAM peering is allowed by the local device, the state moves to `sendLocalAndRemoteOk(6)`. Note that both the `sendLocalAndRemote(5)` and `oamPeeringLocallyRejected(7)` states fall within the state `SEND_LOCAL_REMOTE` of the Discovery state diagram (see IEEE Std 802.3, Figure 57-5), with the difference being whether the local OAM client has actively rejected the peering or has just not indicated any decision yet. Whether a peering decision has been made is indicated via the local flags field in the OAMPDU (reflected in the `aOAMLocalFlagsField` of 30.3.6.1.10).

If the remote OAM entity rejects the peering, the state becomes `oamPeeringRemotelyRejected(8)`. Note that both the `sendLocalAndRemoteOk(6)` and `oamPeeringRemotelyRejected(8)` states fall within the state `SEND_LOCAL_REMOTE_OK` of the Discovery state diagram (see IEEE Std 802.3, Figure 57-5), with the difference being whether the remote OAM client has rejected the peering or has just not yet decided. This is indicated via the remote flags field in the OAMPDU (reflected in the `aOAMRemoteFlagsField` of 30.3.6.1.11).

When the local OAM entity learns that both it and the remote OAM entity have accepted the peering, the state moves to `operational(9)` corresponding to the `SEND_ANY` state of the Discovery state diagram (see IEEE Std 802.3, Figure 57-5).

Since Ethernet OAM functions are not designed to work completely over half-duplex interfaces, the value `nonOperHalfDuplex(10)` is returned whenever Ethernet OAM is enabled (`dot3OamAdminState` is `enabled(1)`), but the interface is in half-duplex operation.

```
"
REFERENCE "IEEE Std 802.3, 30.3.6.1.4, 30.3.6.1.10, 30.3.6.1.11"
::= { dot3OamEntry 2 }
```

```
dot3OamMode OBJECT-TYPE
  SYNTAX      INTEGER {
                passive(1),
                active(2)
              }
  MAX-ACCESS  read-write
  STATUS      current
  DESCRIPTION
```

"This object configures the mode of OAM operation for this Ethernet-like interface. OAM on Ethernet interfaces may be in 'active' mode or 'passive' mode. These two modes differ in that active mode provides additional capabilities to initiate monitoring activities with the remote OAM peer entity, while passive mode generally waits for the peer to initiate OAM actions with it. As an example, an active OAM entity can put the remote OAM entity in a loopback state, where a passive OAM entity cannot.

The default value of dot3OamMode is dependent on the type of system on which this Ethernet-like interface resides. The default value should be 'active(2)' unless it is known that this system should take on a subservient role to the other device connected over this interface.

Changing this value results in incrementing the configuration revision field of locally generated OAMPDUs (30.3.6.1.12) and potentially re-doing the OAM discovery process if the dot3OamOperStatus was already operational(9).

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.3"  
 ::= { dot3OamEntry 3 }

dot3OamMaxOamPduSize OBJECT-TYPE

SYNTAX Unsigned32 (64..1518)

UNITS "octets"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The largest OAMPDU that the OAM entity supports. OAM entities exchange maximum OAMPDU sizes and negotiate to use the smaller of the two maximum OAMPDU sizes between the peers. This value is determined by the local implementation.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.8"  
 ::= { dot3OamEntry 4 }

dot3OamConfigRevision OBJECT-TYPE

SYNTAX Unsigned32(0..65535)

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The configuration revision of the OAM entity as reflected in the latest OAMPDU sent by the OAM entity. The config revision is used by OAM entities to indicate that configuration changes have occurred, which might require the peer OAM entity to re-evaluate whether OAM peering is allowed.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.12"  
 ::= { dot3OamEntry 5 }

dot3OamFunctionsSupported OBJECT-TYPE

SYNTAX BITS {  
     unidirectionalSupport (0),  
     loopbackSupport (1),  
     eventSupport (2),  
     variableSupport (3)  
 }

```

MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "The OAM functions supported on this Ethernet-like interface.
  OAM consists of separate functional sets beyond the basic
  discovery process that is always required. These functional
  groups can be supported independently by any implementation.
  These values are communicated to the peer via the local
  configuration field of Information OAMPDUs.

  Setting 'unidirectionalSupport(0)' indicates that the OAM
  entity supports the transmission of OAMPDUs on links that are
  operating in unidirectional mode (traffic flowing in one
  direction only). Setting 'loopbackSupport(1)' indicates that
  the OAM entity can initiate and respond to loopback commands.
  Setting 'eventSupport(2)' indicates that the OAM entity can
  send and receive Event Notification OAMPDUs. Setting
  'variableSupport(3)' indicates that the OAM entity can send
  and receive Variable Request and Response OAMPDUs.
  "
REFERENCE   "IEEE Std 802.3, 30.3.6.1.6"
 ::= { dot3OamEntry 6 }

-- *****
--
-- Ethernet OAM Peer group
--

dot3OamPeerTable OBJECT-TYPE
SYNTAX      SEQUENCE OF Dot3OamPeerEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
  "This table contains information about the OAM peer for a
  particular Ethernet-like interface. OAM entities communicate
  with a single OAM peer entity on Ethernet links on which OAM
  is enabled and operating properly. There is one entry in this
  table for each entry in the dot3OamTable for which information
  on the peer OAM entity is available.
  "
 ::= { dot3OamObjects 2 }

dot3OamPeerEntry OBJECT-TYPE
SYNTAX      Dot3OamPeerEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
  "An entry in the table containing information on the peer OAM
  entity for a single Ethernet-like interface.

  Note that there is at most one OAM peer for each Ethernet-like
  interface. Entries are automatically created when information
  about the OAM peer entity becomes available, and automatically
  deleted when the OAM peer entity is no longer in
  communication. Peer information is not available when
  dot3OamOperStatus is disabled(1), linkFault(2),
  passiveWait(3), activeSendLocal(4), or nonOperHalfDuplex(10).
  "
INDEX       { ifIndex }

```

```

 ::= { dot3OamPeerTable 1 }

Dot3OamPeerEntry ::=
 SEQUENCE {
   dot3OamPeerMacAddress      MacAddress,
   dot3OamPeerVendorOui      EightOTwoOui,
   dot3OamPeerVendorInfo     Unsigned32,
   dot3OamPeerMode           INTEGER,
   dot3OamPeerMaxOamPduSize  Unsigned32,
   dot3OamPeerConfigRevision Unsigned32,
   dot3OamPeerFunctionsSupported BITS
 }

dot3OamPeerMacAddress OBJECT-TYPE
 SYNTAX      MacAddress
 MAX-ACCESS  read-only
 STATUS      current
 DESCRIPTION
  "The MAC address of the peer OAM entity. The MAC address is
  derived from the most recently received OAMPDU.
  "
 REFERENCE  "IEEE Std 802.3, 30.3.6.1.5."
 ::= { dot3OamPeerEntry 1 }

dot3OamPeerVendorOui OBJECT-TYPE
 SYNTAX      EightOTwoOui
 MAX-ACCESS  read-only
 STATUS      current
 DESCRIPTION
  "The OUI of the OAM peer as reflected in the latest
  Information OAMPDU received with a Local Information TLV. The
  OUI can be used to identify the vendor of the remote OAM
  entity. This value is initialized to three octets of zero
  before any Local Information TLV is received.
  "
 REFERENCE  "IEEE Std 802.3, 30.3.6.1.16."
 ::= { dot3OamPeerEntry 2 }

dot3OamPeerVendorInfo OBJECT-TYPE
 SYNTAX      Unsigned32
 MAX-ACCESS  read-only
 STATUS      current
 DESCRIPTION
  "The Vendor Info of the OAM peer as reflected in the latest
  Information OAMPDU received with a Local Information TLV.
  The semantics of the Vendor Information field is proprietary
  and specific to the vendor (identified by the
  dot3OamPeerVendorOui). This information could, for example,
  be used to identify a specific product or product family.
  This value is initialized to zero before any Local
  Information TLV is received.
  "
 REFERENCE  "IEEE Std 802.3, 30.3.6.1.17."
 ::= { dot3OamPeerEntry 3 }

dot3OamPeerMode OBJECT-TYPE
 SYNTAX      INTEGER {
                passive(1),
                active(2),
              }

```

```

        unknown(3)
    }
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The mode of the OAM peer as reflected in the latest
    Information OAMPDU received with a Local Information TLV. The
    mode of the peer can be determined from the Configuration
    field in the Local Information TLV of the last Information
    OAMPDU received from the peer. The value is unknown(3)
    whenever no Local Information TLV has been received. The
    values of active(2) and passive(1) are returned when a Local
    Information TLV has been received indicating that the peer is
    in active or passive mode, respectively.
    "
REFERENCE "IEEE Std 802.3, 30.3.6.1.7."
::= { dot3OamPeerEntry 4 }

dot3OamPeerMaxOamPduSize OBJECT-TYPE
SYNTAX Unsigned32 (0 | 64..1518)
UNITS "octets"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The maximum size of OAMPDU supported by the peer as reflected
    in the latest Information OAMPDU received with a Local
    Information TLV. Ethernet OAM on this interface shall not use
    OAMPDUs that exceed this size. The maximum OAMPDU size can be
    determined from the PDU Configuration field of the Local
    Information TLV of the last Information OAMPDU received from
    the peer. A value of zero is returned if no Local Information
    TLV has been received. Otherwise, the value of the OAM peer's
    maximum OAMPDU size is returned in this value.
    "
REFERENCE "IEEE Std 802.3, 30.3.6.1.9."
::= { dot3OamPeerEntry 5 }

dot3OamPeerConfigRevision OBJECT-TYPE
SYNTAX Unsigned32(0..65535)
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The configuration revision of the OAM peer as reflected in
    the latest OAMPDU. This attribute is changed by the peer
    whenever it has a local configuration change for Ethernet OAM
    on this interface. The configuration revision can be
    determined from the Revision field of the Local Information
    TLV of the most recently received Information OAMPDU with
    a Local Information TLV. A value of zero is returned if
    no Local Information TLV has been received.
    "
REFERENCE "IEEE Std 802.3, 30.3.6.1.13."
::= { dot3OamPeerEntry 6 }

dot3OamPeerFunctionsSupported OBJECT-TYPE
SYNTAX BITS {
    unidirectionalSupport (0),
    loopbackSupport(1),
    eventSupport(2),
    variableSupport(3)

```

```

    }
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The OAM functions supported on this Ethernet-like interface.
    OAM consists of separate functionality sets above the basic
    discovery process. This value indicates the capabilities of
    the peer OAM entity with respect to these functions. This
    value is initialized so all bits are clear.

    If unidirectionalSupport(0) is set, then the peer OAM entity
    supports sending OAM frames on Ethernet interfaces when the
    receive path is known to be inoperable. If
    loopbackSupport(1) is set, then the peer OAM entity can send
    and receive OAM loopback commands. If eventSupport(2) is set,
    then the peer OAM entity can send and receive event OAMPDUs to
    signal various error conditions. If variableSupport(3) is
    set, then the peer OAM entity can send and receive variable
    requests to monitor the attribute value as described in Clause
    57 of IEEE Std 802.3.

    The capabilities of the OAM peer can be determined from the
    configuration field of the Local Information TLV of the most
    recently received Information OAMPDU with a Local Information
    TLV. All zeros are returned if no Local Information TLV has
    yet been received.
    "
REFERENCE "IEEE Std 802.3, REFERENCE 30.3.6.1.7."
 ::= { dot3OamPeerEntry 7 }

-- *****
--
-- Ethernet OAM Loopback group
--

dot3OamLoopbackTable OBJECT-TYPE
    SYNTAX SEQUENCE OF Dot3OamLoopbackEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "This table contains controls for the loopback state of the
        local link as well as indicates the status of the loopback
        function. There is one entry in this table for each entry in
        dot3OamTable that supports loopback functionality (where
        dot3OamFunctionsSupported includes the loopbackSupport bit
        set).

        Loopback can be used to place the remote OAM entity in a state
        where every received frame (except OAMPDUs) is echoed back
        over the same interface on which they were received. In this
        state, at the remote entity, 'normal' traffic is disabled as
        only the looped back frames are transmitted on the interface.
        Loopback is thus an intrusive operation that prohibits normal
        data flow and should be used accordingly.
        "
 ::= { dot3OamObjects 3 }

dot3OamLoopbackEntry OBJECT-TYPE
    SYNTAX Dot3OamLoopbackEntry

```

```

MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
  "An entry in the table, containing information on the loopback
  status for a single Ethernet-like interface. Entries in the
  table are automatically created whenever the local OAM entity
  supports loopback capabilities. The loopback status on the
  interface can be determined from the dot3OamLoopbackStatus
  object.
  "
INDEX { ifIndex }
 ::= { dot3OamLoopbackTable 1 }

Dot3OamLoopbackEntry ::=
  SEQUENCE {
    dot3OamLoopbackStatus INTEGER,
    dot3OamLoopbackIgnoreRx INTEGER
  }

dot3OamLoopbackStatus OBJECT-TYPE
  SYNTAX INTEGER {
    -- all values, except where noted, can be read
    -- but cannot be written
    noLoopback (1),

    -- initiatingLoopback can be read or written
    initiatingLoopback (2),
    remoteLoopback (3),

    -- terminatingLoopback can be read or written
    terminatingLoopback (4),
    localLoopback (5),
    unknown (6)
  }
  MAX-ACCESS read-write
  STATUS current
  DESCRIPTION
    "The loopback status of the OAM entity. This status is
    determined by a combination of the local parser and
    multiplexer states, the remote parser and multiplexer states,
    as well as by the actions of the local OAM client. When
    operating in normal mode with no loopback in progress, the
    status reads noLoopback(1).

    The values initiatingLoopback(2) and terminatingLoopback(4)
    can be read or written. The other values can only be read -
    they can never be written. Writing initiatingLoopback causes
    the local OAM entity to start the loopback process with its
    peer. This value can only be written when the status is
    noLoopback(1). Writing the value initiatingLoopback(2) in any
    other state has no effect. When in remoteLoopback(3), writing
    terminatingLoopback(4) causes the local OAM entity to initiate
    the termination of the loopback state. Writing
    terminatingLoopback(4) in any other state has no effect.

    If the OAM client initiates a loopback and has sent a
    Loopback OAMPDU and is waiting for a response, where the local
    parser and multiplexer states are DISCARD (see IEEE Std 802.3,
    57.2.11.1), the status is 'initiatingLoopback'. In this
  "

```

case, the local OAM entity has yet to receive any acknowledgment that the remote OAM entity has received its loopback command request.

If the local OAM client knows that the remote OAM entity is in loopback mode (via the remote state information as described in IEEE Std 802.3, 57.2.11.1, 30.3.6.1.15), the status is remoteLoopback(3). If the local OAM client is in the process of terminating the remote loopback (see IEEE Std 802.3, 57.2.11.3, 30.3.6.1.14) with its local multiplexer and parser states in DISCARD, the status is terminatingLoopback(4). If the remote OAM client has put the local OAM entity in loopback mode as indicated by its local parser state, the status is localLoopback(5).

The unknown(6) status indicates that the parser and multiplexer combination is unexpected. This status may be returned if the OAM loopback is in a transition state but should not persist.

The values of this attribute correspond to the following values of the local and remote parser and multiplexer states.

value	LclPrsr	LclMux	RmtPrsr	RmtMux
noLoopback	FWD	FWD	FWD	FWD
initLoopback	DISCARD	DISCARD	FWD	FWD
rmtLoopback	DISCARD	FWD	LPBK	DISCARD
tmtngLoopback	DISCARD	DISCARD	LPBK	DISCARD
lclLoopback	LPBK	DISCARD	DISCARD	FWD
unknown	***	any other combination	***	***

REFERENCE "IEEE Std 802.3, 57.2.11, 30.3.6.1.14, 30.3.6.1.15"  
 ::= { dot3OamLoopbackEntry 1 }

```
dot3OamLoopbackIgnoreRx OBJECT-TYPE
SYNTAX      INTEGER { ignore(1), process(2) }
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
    "Since OAM loopback is a disruptive operation (user traffic
    does not pass), this attribute provides a mechanism to provide
    controls over whether received OAM loopback commands are
    processed or ignored. When the value is ignore(1), received
    loopback commands are ignored. When the value is process(2),
    OAM loopback commands are processed. The default value is to
    ignore loopback commands (ignore(1))."
REFERENCE   "IEEE Std 802.3, 57.2.11, 30.3.6.1.14, 30.3.6.1.15"
::= { dot3OamLoopbackEntry 2 }
-- *****
--
-- Ethernet OAM Statistics group
--
```

```
dot3OamStatsTable OBJECT-TYPE
SYNTAX      SEQUENCE OF Dot3OamStatsEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table contains statistics for the OAM function on a
```

particular Ethernet-like interface. There is an entry in the table for every entry in the dot3OamTable.

The counters in this table are defined as 32-bit entries to match the counter size as defined in IEEE Std 802.3. Given that the OAM protocol is a slow protocol, the counters increment at a slow rate.

```

"
 ::= { dot3OamObjects 4 }

dot3OamStatsEntry OBJECT-TYPE
    SYNTAX      Dot3OamStatsEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An entry in the table containing statistics information on
        the Ethernet OAM function for a single Ethernet-like
        interface. Entries are automatically created for every entry
        in the dot3OamTable. Counters are maintained across
        transitions in dot3OamOperStatus.
        "
    INDEX       { ifIndex }
    ::= { dot3OamStatsTable 1 }

Dot3OamStatsEntry ::=
    SEQUENCE {
        dot3OamInformationTx          Counter32,
        dot3OamInformationRx          Counter32,
        dot3OamUniqueEventNotificationTx Counter32,
        dot3OamUniqueEventNotificationRx Counter32,
        dot3OamDuplicateEventNotificationTx Counter32,
        dot3OamDuplicateEventNotificationRx Counter32,
        dot3OamLoopbackControlTx      Counter32,
        dot3OamLoopbackControlRx      Counter32,
        dot3OamVariableRequestTx      Counter32,
        dot3OamVariableRequestRx      Counter32,
        dot3OamVariableResponseTx     Counter32,
        dot3OamVariableResponseRx     Counter32,
        dot3OamOrgSpecificTx          Counter32,
        dot3OamOrgSpecificRx          Counter32,
        dot3OamUnsupportedCodesTx     Counter32,
        dot3OamUnsupportedCodesRx     Counter32,
        dot3OamFramesLostDueToOam     Counter32
    }

dot3OamInformationTx OBJECT-TYPE
    SYNTAX      Counter32
    UNITS       "frames"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "A count of the number of Information OAMPDUs transmitted on
        this interface.

        Discontinuities of this counter can occur at re-initialization
        of the management system, and at other times as indicated by
        the value of the ifCounterDiscontinuityTime. "
    REFERENCE  "IEEE Std 802.3, 30.3.6.1.20."
    ::= { dot3OamStatsEntry 1 }

```

## dot3OamInformationRx OBJECT-TYPE

SYNTAX Counter32  
UNITS "frames"  
MAX-ACCESS read-only  
STATUS current

## DESCRIPTION

"A count of the number of Information OAMPDUs received on this interface.

Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.21."

::= { dot3OamStatsEntry 2 }

## dot3OamUniqueEventNotificationTx OBJECT-TYPE

SYNTAX Counter32  
UNITS "frames"  
MAX-ACCESS read-only  
STATUS current

## DESCRIPTION

"A count of the number of unique Event OAMPDUs transmitted on this interface. Event Notifications may be sent in duplicate to increase the probability of successfully being received, given the possibility that a frame may be lost in transit. Duplicate Event Notification transmissions are counted by dot3OamDuplicateEventNotificationTx.

A unique Event Notification OAMPDU is indicated as an Event Notification OAMPDU with a Sequence Number field that is distinct from the previously transmitted Event Notification OAMPDU Sequence Number.

Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.22."

::= { dot3OamStatsEntry 3 }

## dot3OamUniqueEventNotificationRx OBJECT-TYPE

SYNTAX Counter32  
UNITS "frames"  
MAX-ACCESS read-only  
STATUS current

## DESCRIPTION

"A count of the number of unique Event OAMPDUs received on this interface. Event Notification OAMPDUs may be sent in duplicate to increase the probability of successfully being received, given the possibility that a frame may be lost in transit. Duplicate Event Notification receptions are counted by dot3OamDuplicateEventNotificationRx.

A unique Event Notification OAMPDU is indicated as an Event Notification OAMPDU with a Sequence Number field that is distinct from the previously received Event Notification OAMPDU Sequence Number.

Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.24."  
 ::= { dot3OamStatsEntry 4 }

dot3OamDuplicateEventNotificationTx OBJECT-TYPE

SYNTAX Counter32

UNITS "frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of the number of duplicate Event OAMPDUs transmitted on this interface. Event Notification OAMPDUs may be sent in duplicate to increase the probability of successfully being received, given the possibility that a frame may be lost in transit.

A duplicate Event Notification OAMPDU is indicated as an Event Notification OAMPDU with a Sequence Number field that is identical to the previously transmitted Event Notification OAMPDU Sequence Number.

Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.23."  
 ::= { dot3OamStatsEntry 5 }

dot3OamDuplicateEventNotificationRx OBJECT-TYPE

SYNTAX Counter32

UNITS "frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of the number of duplicate Event OAMPDUs received on this interface. Event Notification OAMPDUs may be sent in duplicate to increase the probability of successfully being received, given the possibility that a frame may be lost in transit.

A duplicate Event Notification OAMPDU is indicated as an Event Notification OAMPDU with a Sequence Number field that is identical to the previously received Event Notification OAMPDU Sequence Number.

Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.25."  
 ::= { dot3OamStatsEntry 6 }

dot3OamLoopbackControlTx OBJECT-TYPE

SYNTAX Counter32

UNITS "frames"

```

MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "A count of the number of Loopback Control OAMPDUs transmitted
  on this interface.

  Discontinuities of this counter can occur at re-initialization
  of the management system, and at other times as indicated by
  the value of the ifCounterDiscontinuityTime.
  "
REFERENCE   "IEEE Std 802.3, 30.3.6.1.26."
 ::= { dot3OamStatsEntry 7 }

```

## dot3OamLoopbackControlRx OBJECT-TYPE

```

SYNTAX      Counter32
UNITS       "frames"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "A count of the number of Loopback Control OAMPDUs received
  on this interface.

  Discontinuities of this counter can occur at re-initialization
  of the management system, and at other times as indicated by
  the value of the ifCounterDiscontinuityTime.
  "
REFERENCE   "IEEE Std 802.3, 30.3.6.1.27."
 ::= { dot3OamStatsEntry 8 }

```

## dot3OamVariableRequestTx OBJECT-TYPE

```

SYNTAX      Counter32
UNITS       "frames"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "A count of the number of Variable Request OAMPDUs transmitted
  on this interface.

  Discontinuities of this counter can occur at re-initialization
  of the management system, and at other times as indicated by
  the value of the ifCounterDiscontinuityTime.
  "
REFERENCE   "IEEE Std 802.3, 30.3.6.1.28."
 ::= { dot3OamStatsEntry 9 }

```

## dot3OamVariableRequestRx OBJECT-TYPE

```

SYNTAX      Counter32
UNITS       "frames"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "A count of the number of Variable Request OAMPDUs received on
  this interface.

  Discontinuities of this counter can occur at re-initialization
  of the management system, and at other times as indicated by
  the value of the ifCounterDiscontinuityTime.
  "
REFERENCE   "IEEE Std 802.3, 30.3.6.1.29."

```

```
::= { dot3OamStatsEntry 10 }
```

dot3OamVariableResponseTx OBJECT-TYPE

```
SYNTAX      Counter32
UNITS       "frames"
MAX-ACCESS  read-only
STATUS      current
```

DESCRIPTION

"A count of the number of Variable Response OAMPDUs transmitted on this interface.

Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime.

"

```
REFERENCE   "IEEE Std 802.3, 30.3.6.1.30."
```

```
::= { dot3OamStatsEntry 11 }
```

dot3OamVariableResponseRx OBJECT-TYPE

```
SYNTAX      Counter32
UNITS       "frames"
MAX-ACCESS  read-only
STATUS      current
```

DESCRIPTION

"A count of the number of Variable Response OAMPDUs received on this interface.

Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime.

"

```
REFERENCE   "IEEE Std 802.3, 30.3.6.1.31."
```

```
::= { dot3OamStatsEntry 12 }
```

dot3OamOrgSpecificTx OBJECT-TYPE

```
SYNTAX      Counter32
UNITS       "frames"
MAX-ACCESS  read-only
STATUS      current
```

DESCRIPTION

"A count of the number of Organization Specific OAMPDUs transmitted on this interface.

Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime.

"

```
REFERENCE   "IEEE Std 802.3, 30.3.6.1.32."
```

```
::= { dot3OamStatsEntry 13 }
```

dot3OamOrgSpecificRx OBJECT-TYPE

```
SYNTAX      Counter32
UNITS       "frames"
MAX-ACCESS  read-only
STATUS      current
```

DESCRIPTION

"A count of the number of Organization Specific OAMPDUs received on this interface.

Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.33."  
 ::= { dot3OamStatsEntry 14 }

dot3OamUnsupportedCodesTx OBJECT-TYPE

SYNTAX Counter32  
 UNITS "frames"  
 MAX-ACCESS read-only  
 STATUS current

DESCRIPTION

"A count of the number of OAMPDUs transmitted on this interface with an unsupported op-code.

Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.18."  
 ::= { dot3OamStatsEntry 15 }

dot3OamUnsupportedCodesRx OBJECT-TYPE

SYNTAX Counter32  
 UNITS "frames"  
 MAX-ACCESS read-only  
 STATUS current

DESCRIPTION

"A count of the number of OAMPDUs received on this interface with an unsupported op-code.

Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.19."  
 ::= { dot3OamStatsEntry 16 }

dot3OamFramesLostDueToOam OBJECT-TYPE

SYNTAX Counter32  
 UNITS "frames"  
 MAX-ACCESS read-only  
 STATUS current

DESCRIPTION

"A count of the number of frames that were dropped by the OAM multiplexer. Since the OAM multiplexer has multiple inputs and a single output, there may be cases where frames are dropped due to transmit resource contention. This counter is incremented whenever a frame is dropped by the OAM layer. Note that any Ethernet frame, not just OAMPDUs, may be dropped by the OAM layer. This can occur when an OAMPDU takes precedence over a 'normal' frame resulting in the 'normal' frame being dropped.

When this counter is incremented, no other counters in this MIB are incremented.

Discontinuities of this counter can occur at re-initialization

```

    of the management system, and at other times as indicated by
    the value of the ifCounterDiscontinuityTime.
    "
REFERENCE    "IEEE Std 802.3, 30.3.6.1.46."
 ::= { dot3OamStatsEntry 17 }

-- *****
--
-- Ethernet OAM Event Configuration group
--

dot3OamEventConfigTable OBJECT-TYPE
SYNTAX      SEQUENCE OF Dot3OamEventConfigEntry
MAX-ACCESS not-accessible
STATUS      current
DESCRIPTION
    "Ethernet OAM includes the ability to generate and receive
    Event Notification OAMPDUs to indicate various link problems.
    This table contains the mechanisms to enable Event
    Notifications and configure the thresholds to generate the
    standard Ethernet OAM events. There is one entry in the table
    for every entry in dot3OamTable that supports OAM events
    (where dot3OamFunctionsSupported includes the eventSupport
    bit set). The values in the table are maintained across
    changes to dot3OamOperStatus.

    The standard threshold crossing events are:
    - Errored Symbol Period Event. Generated when the number of
      symbol errors exceeds a threshold within a given window
      defined by a number of symbols (for example, 1,000 symbols
      out of 1,000,000 had errors).
    - Errored Frame Period Event. Generated when the number of
      frame errors exceeds a threshold within a given window
      defined by a number of frames (for example, 10 frames out
      of 1000 had errors).
    - Errored Frame Event. Generated when the number of frame
      errors exceeds a threshold within a given window defined
      by a period of time (for example, 10 frames in 1 second
      had errors).
    - Errored Frame Seconds Summary Event. Generated when the
      number of errored frame seconds exceeds a threshold within
      a given time period (for example, 10 errored frame seconds
      within the last 100 seconds). An errored frame second is
      defined as a 1 second interval which had >0 frame errors.
    There are other events (dying gasp, critical events) that are
    not threshold crossing events but which can be
    enabled/disabled via this table.
    "
 ::= { dot3OamObjects 5 }

dot3OamEventConfigEntry OBJECT-TYPE
SYNTAX      Dot3OamEventConfigEntry
MAX-ACCESS not-accessible
STATUS      current
DESCRIPTION
    "Entries are automatically created and deleted from this
    table, and exist whenever the OAM entity supports Ethernet OAM
    events (as indicated by the eventSupport bit in
    dot3OamFunctionsSupported). Values in the table are

```

maintained across changes to the value of dot3OamOperStatus.

Event configuration controls when the local management entity sends Event Notification OAMPDUs to its OAM peer, and when certain event flags are set or cleared in OAMPDUs.

```

"
INDEX          { ifIndex }
 ::= { dot3OamEventConfigTable 1 }
Dot3OamEventConfigEntry ::=
SEQUENCE {
    dot3OamErrSymPeriodWindowHi      Unsigned32,
    dot3OamErrSymPeriodWindowLo     Unsigned32,
    dot3OamErrSymPeriodThresholdHi  Unsigned32,
    dot3OamErrSymPeriodThresholdLo  Unsigned32,
    dot3OamErrSymPeriodEvNotifEnable TruthValue,
    dot3OamErrFramePeriodWindow     Unsigned32,
    dot3OamErrFramePeriodThreshold  Unsigned32,
    dot3OamErrFramePeriodEvNotifEnable TruthValue,
    dot3OamErrFrameWindow            Unsigned32,
    dot3OamErrFrameThreshold         Unsigned32,
    dot3OamErrFrameEvNotifEnable     TruthValue,
    dot3OamErrFrameSecsSummaryWindow Integer32,
    dot3OamErrFrameSecsSummaryThreshold Integer32,
    dot3OamErrFrameSecsEvNotifEnable TruthValue,
    dot3OamDyingGaspEnable           TruthValue,
    dot3OamCriticalEventEnable       TruthValue
}

```

dot3OamErrSymPeriodWindowHi OBJECT-TYPE

SYNTAX Unsigned32

UNITS "2<sup>32</sup> symbols"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The two objects dot3OamErrSymPeriodWindowHi and dot3OamErrSymPeriodLo together form an unsigned 64-bit integer representing the number of symbols over which this threshold event is defined. This is defined as

$$\text{dot3OamErrSymPeriodWindow} = ((2^{32}) * \text{dot3OamErrSymPeriodWindowHi}) + \text{dot3OamErrSymPeriodWindowLo}$$

If dot3OamErrSymPeriodThreshold symbol errors occur within a window of dot3OamErrSymPeriodWindow symbols, an Event Notification OAMPDU should be generated with an Errored Symbol Period Event TLV indicating that the threshold has been crossed in this window.

The default value for dot3OamErrSymPeriodWindow is the number of symbols in one second for the underlying physical layer.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.34"

::= { dot3OamEventConfigEntry 1 }

dot3OamErrSymPeriodWindowLo OBJECT-TYPE

SYNTAX Unsigned32

UNITS "symbols"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The two objects dot3OamErrSymPeriodWindowHi and dot3OamErrSymPeriodWindowLo together form an unsigned 64-bit integer representing the number of symbols over which this threshold event is defined. This is defined as

$$\text{dot3OamErrSymPeriodWindow} = ((2^{32}) * \text{dot3OamErrSymPeriodWindowHi}) + \text{dot3OamErrSymPeriodWindowLo}$$

If dot3OamErrSymPeriodThreshold symbol errors occur within a window of dot3OamErrSymPeriodWindow symbols, an Event Notification OAMPDU should be generated with an Errored Symbol Period Event TLV indicating that the threshold has been crossed in this window.

The default value for dot3OamErrSymPeriodWindow is the number of symbols in one second for the underlying physical layer.

REFERENCE "IEEE Std 802.3, 30.3.6.1.34"  
 ::= { dot3OamEventConfigEntry 2 }

dot3OamErrSymPeriodThresholdHi OBJECT-TYPE

SYNTAX Unsigned32  
 UNITS "2<sup>32</sup> symbols"  
 MAX-ACCESS read-write  
 STATUS current

DESCRIPTION

"The two objects dot3OamErrSymPeriodThresholdHi and dot3OamErrSymPeriodThresholdLo together form an unsigned 64-bit integer representing the minimum number of symbol errors occurring within a given window to cause an Errored Symbol Period Event.

This is defined as

$$\text{dot3OamErrSymPeriodThreshold} = ((2^{32}) * \text{dot3OamErrSymPeriodThresholdHi}) + \text{dot3OamErrSymPeriodThresholdLo}$$

If dot3OamErrSymPeriodThreshold symbol errors occur within a window of dot3OamErrSymPeriodWindow symbols, an Event Notification OAMPDU is generated with an Errored Symbol Period Event TLV indicating that the threshold has been crossed in this window.

The default value for dot3OamErrSymPeriodThreshold is one symbol errors. If the threshold value is zero, then an Event Notification OAMPDU is sent periodically (at the end of every window). This can be used as an asynchronous notification to the peer OAM entity of the statistics related to this threshold crossing alarm.

REFERENCE "IEEE Std 802.3, 30.3.6.1.34"  
 ::= { dot3OamEventConfigEntry 3 }

dot3OamErrSymPeriodThresholdLo OBJECT-TYPE

SYNTAX Unsigned32  
 UNITS "symbols"  
 MAX-ACCESS read-write  
 STATUS current

DESCRIPTION

"The two objects dot3OamErrSymPeriodThresholdHi and dot3OamErrSymPeriodThresholdLo together form an unsigned 64-bit integer representing the minimum number of symbol errors occurring within a given window to cause an Errored Symbol Period Event.

This is defined as

```
dot3OamErrSymPeriodThreshold =
    ((2^32) * dot3OamErrSymPeriodThresholdHi)
    + dot3OamErrSymPeriodThresholdLo
```

If dot3OamErrSymPeriodThreshold symbol errors occur within a window of dot3OamErrSymPeriodWindow symbols, an Event Notification OAMPDU is generated with an Errored Symbol Period Event TLV indicating that the threshold has been crossed in this window.

The default value for dot3OamErrSymPeriodThreshold is one symbol error. If the threshold value is zero, then an Event Notification OAMPDU is sent periodically (at the end of every window). This can be used as an asynchronous notification to the peer OAM entity of the statistics related to this threshold crossing alarm.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.34"

::= { dot3OamEventConfigEntry 4 }

dot3OamErrSymPeriodEvNotifEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"If true, the OAM entity sends an Event Notification OAMPDU when an Errored Symbol Period Event occurs.

The default value for this object is true for Ethernet-like interfaces that support OAM. If the OAM layer does not support Event Notifications (as indicated via the dot3OamFunctionsSupported attribute), this value is ignored.

"

::= { dot3OamEventConfigEntry 5 }

dot3OamErrFramePeriodWindow OBJECT-TYPE

SYNTAX Unsigned32

UNITS "frames"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The number of frames over which the threshold is defined. The default value of the window is the number of minimum size Ethernet frames that can be received over the physical layer in one second.

If dot3OamErrFramePeriodThreshold frame errors occur within a window of dot3OamErrFramePeriodWindow frames, an Event Notification OAMPDU should be generated with an Errored Frame Period Event TLV indicating that the threshold has been crossed in this window.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.38"  
 ::= { dot3OamEventConfigEntry 6 }

dot3OamErrFramePeriodThreshold OBJECT-TYPE

SYNTAX Unsigned32

UNITS "frames"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The minimum number of frame errors that cause an Errored Frame Period Event. The default value is one frame error. If the threshold value is zero, then an Event Notification OAMPDU is sent periodically (at the end of every window). This can be used as an asynchronous notification to the peer OAM entity of the statistics related to this threshold crossing alarm.

If dot3OamErrFramePeriodThreshold frame errors occur within a window of dot3OamErrFramePeriodWindow frames, an Event Notification OAMPDU is generated with an Errored Frame Period Event TLV indicating that the threshold has been crossed in this window.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.38"  
 ::= { dot3OamEventConfigEntry 7 }

dot3OamErrFramePeriodEvNotifEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"If true, the OAM entity should send an Event Notification OAMPDU when an Errored Frame Period Event occurs.

By default, this object should have the value true for Ethernet-like interfaces that support OAM. If the OAM layer does not support Event Notifications (as indicated via the dot3OamFunctionsSupported attribute), this value is ignored.

"

::= { dot3OamEventConfigEntry 8 }

dot3OamErrFrameWindow OBJECT-TYPE

SYNTAX Unsigned32

UNITS "tenths of a second"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"The amount of time (in 100ms increments) over which the threshold is defined. The default value is 10 (1 second).

If dot3OamErrFrameThreshold frame errors occur within a window of dot3OamErrFrameWindow seconds (measured in tenths of seconds), an Event Notification OAMPDU should be generated with an Errored Frame Event TLV indicating that the threshold has been crossed in this window.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.36"  
 DEFVAL { 10 }  
 ::= { dot3OamEventConfigEntry 9 }

```

dot3OamErrFrameThreshold OBJECT-TYPE
    SYNTAX      Unsigned32
    UNITS       "frames"
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The minimum number of frame errors that cause an Errored Frame
        Event. The default value is one frame error. If the
        threshold value is zero, then an Event Notification OAMPDU is
        sent periodically (at the end of every window). This can be
        used as an asynchronous notification to the peer OAM entity of
        the statistics related to this threshold crossing alarm.

        If dot3OamErrFrameThreshold frame errors occur within a window
        of dot3OamErrFrameWindow (in tenths of seconds), an Event
        Notification OAMPDU is generated with an Errored Frame
        Event TLV indicating the threshold has been crossed in this
        window.
        "
    REFERENCE   "IEEE Std 802.3, 30.3.6.1.36"
    DEFVAL { 1 }
    ::= { dot3OamEventConfigEntry 10 }

dot3OamErrFrameEvNotifEnable OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "If true, the OAM entity should send an Event Notification
        OAMPDU when an Errored Frame Event occurs.

        By default, this object should have the value true for
        Ethernet-like interfaces that support OAM. If the OAM layer
        does not support Event Notifications (as indicated via the
        dot3OamFunctionsSupported attribute), this value is ignored.
        "
    DEFVAL { true }
    ::= { dot3OamEventConfigEntry 11 }

dot3OamErrFrameSecsSummaryWindow OBJECT-TYPE
    SYNTAX      Integer32 (100..9000)
    UNITS       "tenths of a second"
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The amount of time (in 100 ms intervals) over which the
        threshold is defined. The default value is 100 (10 seconds).

        If dot3OamErrFrameSecsSummaryThreshold frame errors occur
        within a window of dot3OamErrFrameSecsSummaryWindow (in tenths
        of seconds), an Event Notification OAMPDU should be generated
        with an Errored Frame Seconds Summary Event TLV indicating
        that the threshold has been crossed in this window.
        "
    REFERENCE   "IEEE Std 802.3, 30.3.6.1.40"
    DEFVAL { 100 }
    ::= { dot3OamEventConfigEntry 12 }

dot3OamErrFrameSecsSummaryThreshold OBJECT-TYPE

```

```

SYNTAX      Integer32 (1..900)
UNITS       "errored frame seconds"
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
  "The minimum number of errored frame seconds that cause an Errored
  Frame Seconds Summary Event. The default value is one errored frame
  second. If the threshold value is zero, then an Event
  Notification OAMPDU is sent periodically (at the end of every
  window). This can be used as an asynchronous notification to
  the peer OAM entity of the statistics related to this
  threshold crossing alarm.

  If dot3OamErrFrameSecsSummaryThreshold frame errors occur
  within a window of dot3OamErrFrameSecsSummaryWindow (in tenths
  of seconds), an Event Notification OAMPDU is generated
  with an Errored Frame Seconds Summary Event TLV indicating
  that the threshold has been crossed in this window.
  "
REFERENCE   "IEEE Std 802.3, 30.3.6.1.40"
DEFVAL { 1 }
 ::= { dot3OamEventConfigEntry 13 }

```

```
dot3OamErrFrameSecsEvNotifEnable OBJECT-TYPE
```

```

SYNTAX      TruthValue
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
  "If true, the local OAM entity sends an Event Notification
  OAMPDU when an Errored Frame Seconds Event occurs.

  The default value for this object is true for
  Ethernet-like interfaces that support OAM. If the OAM layer
  does not support Event Notifications (as indicated via the
  dot3OamFunctionsSupported attribute), this value is ignored.
  "
DEFVAL { true }
 ::= { dot3OamEventConfigEntry 14 }

```

```
dot3OamDyingGaspEnable OBJECT-TYPE
```

```

SYNTAX      TruthValue
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION
  "If true, the local OAM entity should attempt to indicate a
  dying gasp via the OAMPDU flags field to its peer OAM entity
  when a dying gasp event occurs. The exact definition of a
  dying gasp event is implementation dependent. If the system
  does not support dying gasp capability, setting this object
  has no effect, and reading the object always returns
  'false'.

  The default value for this object is true for
  Ethernet-like interfaces that support OAM. If the OAM layer
  does not support Event Notifications (as indicated via the
  dot3OamFunctionsSupported attribute), this value is ignored.
  "
DEFVAL { true }
 ::= { dot3OamEventConfigEntry 15 }

```

```

dot3OamCriticalEventEnable OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "If true, the local OAM entity should attempt to indicate a
        critical event via the OAMPDU flags to its peer OAM entity
        when a critical event occurs. The exact definition of a
        critical event is implementation dependent. If the system
        does not support critical event capability, setting this
        object has no effect, and reading the object should always
        result in 'false'."

        By default, this object should have the value true for
        Ethernet-like interfaces that support OAM. If the OAM layer
        does not support Event Notifications (as indicated via the
        dot3OamFunctionsSupported attribute), this value is ignored.
        "
    DEFVAL { true }
    ::= { dot3OamEventConfigEntry 16 }

-- *****
--
-- Ethernet OAM Event Log group
--

dot3OamEventLogTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Dot3OamEventLogEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table records a history of the events that have occurred
        at the Ethernet OAM level. These events can include locally
        detected events, which may result in locally generated
        OAMPDUs, and remotely detected events, which are detected by
        the OAM peer entity and signaled to the local entity via
        Ethernet OAM. Ethernet OAM events can be signaled by Event
        Notification OAMPDUs or by the flags field in any OAMPDU.

        This table contains both threshold crossing events and
        non-threshold crossing events. The parameters for the
        threshold window, threshold value, and actual value
        (dot3OamEventLogWindowXX, dot3OamEventLogThresholdXX,
        dot3OamEventLogValue) are only applicable to threshold
        crossing events, and are returned as all F's ( $2^{32} - 1$ ) for
        non-threshold crossing events.

        Entries in the table are automatically created when such
        events are detected. The size of the table is implementation
        dependent. When the table reaches its maximum size, older
        entries are automatically deleted to make room for newer
        entries.
        "
    ::= { dot3OamObjects 6 }

dot3OamEventLogEntry OBJECT-TYPE
    SYNTAX      Dot3OamEventLogEntry
    MAX-ACCESS  not-accessible

```

```

STATUS      current
DESCRIPTION
  "An entry in the dot3OamEventLogTable. Entries are
  automatically created whenever Ethernet OAM events occur at
  the local OAM entity, and when Event Notification OAMPDUs are
  received at the local OAM entity (indicating that events have
  occurred at the peer OAM entity). The size of the table is
  implementation dependent, but when the table becomes full,
  older events are automatically deleted to make room for newer
  events. The table index dot3OamEventLogIndex increments for
  each new entry, and when the maximum value is reached, the
  value restarts at zero.
  "
INDEX      { ifIndex, dot3OamEventLogIndex }
 ::= { dot3OamEventLogTable 1 }

Dot3OamEventLogEntry ::=
SEQUENCE {
  dot3OamEventLogIndex      Unsigned32,
  dot3OamEventLogTimestamp  TimeStamp,
  dot3OamEventLogOui        EightOTwoOui,
  dot3OamEventLogType       Unsigned32,
  dot3OamEventLogLocation   INTEGER,
  dot3OamEventLogWindowHi   Unsigned32,
  dot3OamEventLogWindowLo   Unsigned32,
  dot3OamEventLogThresholdHi Unsigned32,
  dot3OamEventLogThresholdLo Unsigned32,
  dot3OamEventLogValue      CounterBasedGauge64,
  dot3OamEventLogRunningTotal CounterBasedGauge64,
  dot3OamEventLogEventTotal Unsigned32
}

dot3OamEventLogIndex      OBJECT-TYPE
SYNTAX      Unsigned32(1..4294967295)
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
  "An arbitrary integer for identifying individual events
  within the event log. "
 ::= { dot3OamEventLogEntry 1 }

dot3OamEventLogTimestamp  OBJECT-TYPE
SYNTAX      TimeStamp
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "The value of sysUpTime at the time of the logged event. For
  locally generated events, the time of the event can be
  accurately retrieved from sysUpTime. For remotely generated
  events, the time of the event is indicated by the reception of
  the Event Notification OAMPDU indicating that the event
  occurred on the peer. A system may attempt to adjust the
  timestamp value to more accurately reflect the time of the
  event at the peer OAM entity by using other information, such
  as that found in the timestamp found of the Event Notification
  TLVs, which provides an indication of the relative time
  between events at the peer entity. "
 ::= { dot3OamEventLogEntry 2 }

```

```

dot3OamEventLogOui OBJECT-TYPE
    SYNTAX      EightOTwoOui
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The OUI of the entity defining the object type. All IEEE
        802.3 defined events (as appearing in IEEE Std 802.3 except for the
        Organizationally Unique Event TLVs) use the IEEE 802.3 OUI of
        0x0180C2. Organizations defining their own Event Notification
        TLVs include their OUI in the Event Notification TLV that
        gets reflected here. "
    ::= { dot3OamEventLogEntry 3 }

dot3OamEventLogType OBJECT-TYPE
    SYNTAX      Unsigned32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The type of event that generated this entry in the event log.
        When the OUI is the IEEE 802.3 OUI of 0x0180C2, the following
        event types are defined:
            erroredSymbolEvent(1),
            erroredFramePeriodEvent(2),
            erroredFrameEvent(3),
            erroredFrameSecondsEvent(4),
            linkFault(256),
            dyingGaspEvent(257),
            criticalLinkEvent(258)
        The first four are considered threshold crossing events, as
        they are generated when a metric exceeds a given value within
        a specified window. The other three are not threshold
        crossing events.

        When the OUI is not 71874 (0x0180C2 in hex), then some other
        organization has defined the event space. If event subtyping
        is known to the implementation, it may be reflected here.
        Otherwise, this value should return all F's (2^32 - 1).
        "
    REFERENCE  "IEEE Std 802.3, 30.3.6.1.10 and 57.5.3."
    ::= { dot3OamEventLogEntry 4 }

dot3OamEventLogLocation OBJECT-TYPE
    SYNTAX      INTEGER { local(1), remote(2) }
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "Whether this event occurred locally (local(1)), or was
        received from the OAM peer via Ethernet OAM (remote(2)).
        "
    ::= { dot3OamEventLogEntry 5 }

dot3OamEventLogWindowHi OBJECT-TYPE
    SYNTAX      Unsigned32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "If the event represents a threshold crossing event, the two
        objects dot3OamEventWindowHi and dot3OamEventWindowLo, form
        an unsigned 64-bit integer yielding the window over which the

```

value was measured for the threshold crossing event (for example, 5, when 11 occurrences happened in 5 seconds while the threshold was 10). The two objects are combined as:

$$\text{dot3OamEventLogWindow} = ((2^{32}) * \text{dot3OamEventLogWindowHi}) + \text{dot3OamEventLogWindowLo}$$

Otherwise, this value is returned as all F's ( $2^{32} - 1$ ) and adds no useful information.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.37 and 57.5.3.2."

::= { dot3OamEventLogEntry 6 }

dot3OamEventLogWindowLo OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"If the event represents a threshold crossing event, the two objects dot3OamEventWindowHi and dot3OamEventWindowLo form an unsigned 64-bit integer yielding the window over which the value was measured for the threshold crossing event (for example, 5, when 11 occurrences happened in 5 seconds while the threshold was 10). The two objects are combined as:

$$\text{dot3OamEventLogWindow} = ((2^{32}) * \text{dot3OamEventLogWindowHi}) + \text{dot3OamEventLogWindowLo}$$

Otherwise, this value is returned as all F's ( $2^{32} - 1$ ) and adds no useful information.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.37 and 57.5.3.2."

::= { dot3OamEventLogEntry 7 }

dot3OamEventLogThresholdHi OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"If the event represents a threshold crossing event, the two objects dot3OamEventThresholdHi and dot3OamEventThresholdLo form an unsigned 64-bit integer yielding the value that was crossed for the threshold crossing event (for example, 10, when 11 occurrences happened in 5 seconds while the threshold was 10). The two objects are combined as:

$$\text{dot3OamEventLogThreshold} = ((2^{32}) * \text{dot3OamEventLogThresholdHi}) + \text{dot3OamEventLogThresholdLo}$$

Otherwise, this value is returned as all F's ( $2^{32} - 1$ ) and adds no useful information.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.37 and 57.5.3.2."

::= { dot3OamEventLogEntry 8 }

dot3OamEventLogThresholdLo OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"If the event represents a threshold crossing event, the two objects dot3OamEventThresholdHi and dot3OamEventThresholdLo form an unsigned 64-bit integer yielding the value that was crossed for the threshold crossing event (for example, 10, when 11 occurrences happened in 5 seconds while the threshold was 10). The two objects are combined as:

$$\text{dot3OamEventLogThreshold} = ((2^{32}) * \text{dot3OamEventLogThresholdHi}) + \text{dot3OamEventLogThresholdLo}$$

Otherwise, this value is returned as all F's ( $2^{32} - 1$ ) and adds no useful information.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.37 and 57.5.3.2."  
 ::= { dot3OamEventLogEntry 9 }

dot3OamEventLogValue OBJECT-TYPE

SYNTAX CounterBasedGauge64

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"If the event represents a threshold crossing event, this value indicates the value of the parameter within the given window that generated this event (for example, 11, when 11 occurrences happened in 5 seconds while the threshold was 10).

Otherwise, this value is returned as all F's ( $2^{64} - 1$ ) and adds no useful information.

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.37 and 57.5.3.2."  
 ::= { dot3OamEventLogEntry 10 }

dot3OamEventLogRunningTotal OBJECT-TYPE

SYNTAX CounterBasedGauge64

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Each Event Notification TLV contains a running total of the number of times an event has occurred, as well as the number of times an Event Notification for the event has been transmitted. For non-threshold crossing events, the number of events (dot3OamLogRunningTotal) and the number of resultant Event Notifications (dot3OamLogEventTotal) should be identical.

For threshold crossing events, since multiple occurrences may be required to cross the threshold, these values are likely different. This value represents the total number of times this event has happened since the last reset (for example, 3253, when 3253 symbol errors have occurred since the last reset, which has resulted in 51 symbol error threshold crossing events since the last reset).

"

REFERENCE "IEEE Std 802.3, 30.3.6.1.37 and 57.5.3.2."  
 ::= { dot3OamEventLogEntry 11 }

dot3OamEventLogEventTotal OBJECT-TYPE

SYNTAX Unsigned32

MAX-ACCESS read-only

```

STATUS      current
DESCRIPTION
  "Each Event Notification TLV contains a running total of the
  number of times an event has occurred, as well as the number
  of times an Event Notification for the event has been
  transmitted. For non-threshold crossing events, the number of
  events (dot3OamLogRunningTotal) and the number of resultant
  Event Notifications (dot3OamLogEventTotal) should be
  identical.

  For threshold crossing events, since multiple occurrences may
  be required to cross the threshold, these values are likely
  different. This value represents the total number of times
  one or more of these occurrences have resulted in an Event
  Notification (for example, 51 when 3253 symbol errors have
  occurred since the last reset, which has resulted in 51 symbol
  error threshold crossing events since the last reset).
  "
REFERENCE   "IEEE Std 802.3, 30.3.6.1.37 and 57.5.3.2."
 ::= { dot3OamEventLogEntry 12 }

-- *****
--
-- Ethernet OAM Notifications
--

dot3OamThresholdEvent NOTIFICATION-TYPE
  OBJECTS { dot3OamEventLogTimestamp,
            dot3OamEventLogOui,
            dot3OamEventLogType,
            dot3OamEventLogLocation,
            dot3OamEventLogWindowHi,
            dot3OamEventLogWindowLo,
            dot3OamEventLogThresholdHi,
            dot3OamEventLogThresholdLo,
            dot3OamEventLogValue,
            dot3OamEventLogRunningTotal,
            dot3OamEventLogEventTotal
          }
STATUS      current
DESCRIPTION
  "A dot3OamThresholdEvent notification is sent when a local or
  remote threshold crossing event is detected. A local
  threshold crossing event is detected by the local entity,
  while a remote threshold crossing event is detected by the
  reception of an Ethernet OAM Event Notification OAMPDU
  that indicates a threshold event.

  This notification should not be sent more than once per
  second.

  The OAM entity can be derived from extracting the ifIndex from
  the variable bindings. The objects in the notification
  correspond to the values in a row instance in the
  dot3OamEventLogTable.

  The management entity should periodically check
  dot3OamEventLogTable to detect any missed events."
 ::= { dot3OamNotifications 1 }

```

```

dot3OamNonThresholdEvent NOTIFICATION-TYPE
  OBJECTS { dot3OamEventLogTimestamp,
            dot3OamEventLogOui,
            dot3OamEventLogType,
            dot3OamEventLogLocation,
            dot3OamEventLogEventTotal
          }
  STATUS current
  DESCRIPTION
    "A dot3OamNonThresholdEvent notification is sent when a local
    or remote non-threshold crossing event is detected. A local
    event is detected by the local entity, while a remote event is
    detected by the reception of an Ethernet OAM Event
    Notification OAMPDU that indicates a non-threshold crossing
    event.

    This notification should not be sent more than once per
    second.

    The OAM entity can be derived from extracting the ifIndex from
    the variable bindings. The objects in the notification
    correspond to the values in a row instance of the
    dot3OamEventLogTable.

    The management entity should periodically check
    dot3OamEventLogTable to detect any missed events."
  ::= { dot3OamNotifications 2 }

-- *****
--
-- Conformance statements
--

dot3OamGroups OBJECT IDENTIFIER ::= { dot3OamConformance 1 }
dot3OamCompliances OBJECT IDENTIFIER ::= { dot3OamConformance 2 }

-- Compliance statements

dot3OamCompliance MODULE-COMPLIANCE
  STATUS current
  DESCRIPTION "The compliance statement for managed entities
              supporting OAM on Ethernet-like interfaces.
              "
  MODULE -- this module
    MANDATORY-GROUPS { dot3OamControlGroup,
                      dot3OamPeerGroup,
                      dot3OamStatsBaseGroup
                    }

  GROUP dot3OamLoopbackGroup
  DESCRIPTION
    "This group is mandatory for all IEEE 802.3 OAM
    implementations that support loopback functionality. "

  GROUP dot3OamErrSymbolPeriodEventGroup
  DESCRIPTION
    "This group is mandatory for all IEEE 802.3 OAM
    implementations that support event functionality. "

```

```

GROUP      dot3OamErrFramePeriodEventGroup
DESCRIPTION
  "This group is mandatory for all IEEE 802.3 OAM
  implementations that support event functionality. "

GROUP      dot3OamErrFrameEventGroup
DESCRIPTION
  "This group is mandatory for all IEEE 802.3 OAM
  implementations that support event functionality. "

GROUP      dot3OamErrFrameSecsSummaryEventGroup
DESCRIPTION
  "This group is mandatory for all IEEE 802.3 OAM
  implementations that support event functionality. "

GROUP      dot3OamFlagEventGroup
DESCRIPTION
  "This group is optional for all IEEE 802.3 OAM
  implementations. The ability to send critical events or dying
  gasp events is not required in any system."

GROUP      dot3OamEventLogGroup
DESCRIPTION
  "This group is optional for all IEEE 802.3 OAM
  implementations. Entries in this table are dependent on what
  event functionality is supported in the local OAM
  implementation. At least one type of event shall be supported
  for entries to appear in this table. "

GROUP      dot3OamNotificationGroup
DESCRIPTION
  "This group is optional for all IEEE 802.3 OAM
  implementations. Since the information in the notifications
  is dependent on the dot3OamEventLogTable, that table shall be
  implemented for notifications. "

 ::= { dot3OamCompliances 1}

dot3OamControlGroup OBJECT-GROUP
OBJECTS      {
  dot3OamAdminState,
  dot3OamOperStatus,
  dot3OamMode,
  dot3OamMaxOamPduSize,
  dot3OamConfigRevision,
  dot3OamFunctionsSupported
}
STATUS      current
DESCRIPTION
  "A collection of objects providing the abilities,
  configuration, and status of an Ethernet OAM entity. "
 ::= { dot3OamGroups 1 }

dot3OamPeerGroup OBJECT-GROUP
OBJECTS      {
  dot3OamPeerMacAddress,
  dot3OamPeerVendorOui,
  dot3OamPeerVendorInfo,
  dot3OamPeerMode,
  dot3OamPeerFunctionsSupported,

```

```

        dot3OamPeerMaxOamPduSize,
        dot3OamPeerConfigRevision
    }
STATUS      current
DESCRIPTION
    "A collection of objects providing the abilities,
    configuration, and status of a peer Ethernet OAM entity. "
 ::= { dot3OamGroups 2 }

dot3OamStatsBaseGroup OBJECT-GROUP
OBJECTS     {
    dot3OamInformationTx,
    dot3OamInformationRx,
    dot3OamUniqueEventNotificationTx,
    dot3OamUniqueEventNotificationRx,
    dot3OamDuplicateEventNotificationTx,
    dot3OamDuplicateEventNotificationRx,
    dot3OamLoopbackControlTx,
    dot3OamLoopbackControlRx,
    dot3OamVariableRequestTx,
    dot3OamVariableRequestRx,
    dot3OamVariableResponseTx,
    dot3OamVariableResponseRx,
    dot3OamOrgSpecificTx,
    dot3OamOrgSpecificRx,
    dot3OamUnsupportedCodesTx,
    dot3OamUnsupportedCodesRx,
    dot3OamFramesLostDueToOam
}
STATUS      current
DESCRIPTION
    "A collection of objects providing the statistics for the
    number of various transmit and receive events for OAM on an
    Ethernet-like interface. Note that all of these counters shall
    be supported even if the related function (as described in
    dot3OamFunctionsSupported) is not supported. "
 ::= { dot3OamGroups 3 }

dot3OamLoopbackGroup OBJECT-GROUP
OBJECTS     {
    dot3OamLoopbackStatus,
    dot3OamLoopbackIgnoreRx
}
STATUS      current
DESCRIPTION
    "A collection of objects for controlling the OAM remote
    loopback function. "
 ::= { dot3OamGroups 4 }

dot3OamErrSymbolPeriodEventGroup OBJECT-GROUP
OBJECTS     {
    dot3OamErrSymPeriodWindowHi,
    dot3OamErrSymPeriodWindowLo,
    dot3OamErrSymPeriodThresholdHi,
    dot3OamErrSymPeriodThresholdLo,
    dot3OamErrSymPeriodEvNotifEnable
}
STATUS      current
DESCRIPTION
    "A collection of objects for configuring the thresholds for an
    Errored Symbol Period Event.

```

Each IEEE Std 802.3 defined Event Notification TLV has its own conformance group because each event can be implemented independently of any other. "

```
 ::= { dot3OamGroups 5 }
```

```
dot3OamErrFramePeriodEventGroup OBJECT-GROUP
OBJECTS      {   dot3OamErrFramePeriodWindow,
                  dot3OamErrFramePeriodThreshold,
                  dot3OamErrFramePeriodEvNotifEnable
                }
STATUS       current
DESCRIPTION
  "A collection of objects for configuring the thresholds for an
  Errored Frame Period Event.
```

Each IEEE Std 802.3 defined Event Notification TLV has its own conformance group because each event can be implemented independently of any other. "

```
 ::= { dot3OamGroups 6 }
```

```
dot3OamErrFrameEventGroup OBJECT-GROUP
OBJECTS      {   dot3OamErrFrameWindow,
                  dot3OamErrFrameThreshold,
                  dot3OamErrFrameEvNotifEnable
                }
STATUS       current
DESCRIPTION
  "A collection of objects for configuring the thresholds for an
  Errored Frame Event.
```

Each IEEE Std 802.3 defined Event Notification TLV has its own conformance group because each event can be implemented independently of any other. "

```
 ::= { dot3OamGroups 7 }
```

```
dot3OamErrFrameSecsSummaryEventGroup OBJECT-GROUP
OBJECTS      {   dot3OamErrFrameSecsSummaryWindow,
                  dot3OamErrFrameSecsSummaryThreshold,
                  dot3OamErrFrameSecsEvNotifEnable
                }
STATUS       current
DESCRIPTION
  "A collection of objects for configuring the thresholds for an
  Errored Frame Seconds Summary Event.
```

Each IEEE Std 802.3 defined Event Notification TLV has its own conformance group because each event can be implemented independently of any other. "

```
 ::= { dot3OamGroups 8 }
```

```
dot3OamFlagEventGroup OBJECT-GROUP
OBJECTS      {   dot3OamDyingGaspEnable,
                  dot3OamCriticalEventEnable
                }
STATUS       current
DESCRIPTION
  "A collection of objects for configuring the sending OAMPDUs
  with the critical event flag or dying gasp flag enabled. "
 ::= { dot3OamGroups 9 }
```

```
dot3OamEventLogGroup OBJECT-GROUP
  OBJECTS {
    dot3OamEventLogTimestamp,
    dot3OamEventLogOui,
    dot3OamEventLogType,
    dot3OamEventLogLocation,
    dot3OamEventLogWindowHi,
    dot3OamEventLogWindowLo,
    dot3OamEventLogThresholdHi,
    dot3OamEventLogThresholdLo,
    dot3OamEventLogValue,
    dot3OamEventLogRunningTotal,
    dot3OamEventLogEventTotal
  }
  STATUS      current
  DESCRIPTION
    "A collection of objects for configuring the thresholds for an
    Errored Frame Seconds Summary Event and maintaining the event
    information. "
    ::= { dot3OamGroups 10 }

dot3OamNotificationGroup NOTIFICATION-GROUP
  NOTIFICATIONS {
    dot3OamThresholdEvent,
    dot3OamNonThresholdEvent
  }
  STATUS      current
  DESCRIPTION
    "A collection of notifications used by Ethernet OAM to signal
    to a management entity that local or remote events have
    occurred on a specified Ethernet link. "
    ::= { dot3OamGroups 11 }

END
```



## 7. Ethernet repeater device MIB module

### 7.1 Overview

This clause defines a portion of the Management Information Base (MIB) for use with SNMP. In particular, it defines objects for managing IEEE Std 802.3 repeaters.

#### 7.1.1 Repeater management

Instances of the object types defined in this clause represent attributes of an IEEE 802.3 (Ethernet-like) repeater, as defined by Clause 9, “Repeater Unit for 10 Mb/s Baseband Networks” and Clause 27, “Repeater for 100 Mb/s Baseband Networks” of IEEE Std 802.3. Implementors of these MIB objects should note that IEEE Std 802.3 explicitly describes when, where, and how various repeater attributes are measured. IEEE Std 802.3 also describes the effects of repeater actions that may be invoked by manipulating instances of the MIB objects defined here. The definitions presented here are based on 30.4 of IEEE Std 802.3. The counters in this clause are defined to be the same as the counters defined in IEEE Std 802.3, with the intention that the same instrumentation can be used to implement both standards.

These repeater MIB module objects may be used to manage non-standard repeater-like devices; however, defining objects to describe implementation-specific properties of non-standard repeater-like devices is outside the scope of this standard.

#### 7.1.2 Structure of the MIB

Objects in this MIB module are arranged into packages, each of which contains a set of related objects within a broad functional category. Objects within a package are generally defined under the same OID subtree. These packages are intended for organizational convenience only, and have no relation to the conformance groups defined later in the document.

##### 7.1.2.1 Basic definitions

The basic definitions include objects that are applicable to all repeaters: status, parameter, and control objects for each repeater within the managed system, for the port groups within the system, and for the individual ports themselves.

##### 7.1.2.2 Monitor definitions

The monitor definitions include monitoring statistics for each repeater within the system and for individual ports.

##### 7.1.2.3 Address tracking definitions

This collection includes objects for tracking the MAC addresses of the DTEs attached to the ports within the system and for mapping the topology of a network.

##### 7.1.2.4 Top N definitions

These objects may be used for tracking the ports with the most activity within the system or within particular repeaters.

### 7.1.3 Relationship to MIB-II

It is assumed that a repeater implementing this MIB will also implement (at least) the ‘system’ group defined in IETF RFC 1213 (MIB-II).

#### 7.1.3.1 Relationship to the ‘system’ group

In MIB-II, the ‘system’ group is defined as being mandatory for all systems such that each managed entity contains one instance of each object in the ‘system’ group. Thus, those objects apply to the entity even if the entity’s sole functionality is management of repeaters.

#### 7.1.3.2 Relationship to the ‘interfaces’ group

In MIB-II, the ‘interfaces’ group is defined as being mandatory for all systems and contains information on an entity’s interfaces, where each interface is thought of as being attached to a ‘subnetwork’. (Note that this term is not to be confused with ‘subnet’, which refers to an addressing partitioning scheme used in the Internet suite of protocols.)

This repeater MIB module uses the notion of ports on a repeater. The concept of a MIB-II interface has no specific relationship to a repeater’s port. Therefore, the ‘interfaces’ group applies only to the one (or more) network interfaces on which the entity managing the repeater sends and receives management protocol operations, and does not apply to the repeater’s ports. This is consistent with the physical-layer nature of a repeater. A repeater-unit is a bitwise store-and-forward device. A repeater port has no MAC address, no MAC implementation, and does not pass packets up to higher-level protocol entities for processing.

NOTE—When a network management entity is observing a repeater, it may appear as though the repeater is passing packets to a higher-level protocol entity. However, this is only a means of implementing management, and this passing of management information is not part of the repeater functionality.<sup>12</sup>

## 7.2 Topology mapping

Network topology mapping is described in section 4 of IETF RFC 2108 [B19].

## 7.3 MIB module definition

An ASCII text version of the MIB definition can be found at the following URL:<sup>13</sup>

[http://www.ieee802.org/3/be/public/mib\\_modules/20110202/802dot3dot1C7mib.txt](http://www.ieee802.org/3/be/public/mib_modules/20110202/802dot3dot1C7mib.txt)

<sup>12</sup>Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard.

<sup>13</sup>Copyright release for MIB modules: Users of this standard may freely reproduce the MIB module contained in this subclause so that it can be used for its intended purpose.

```

IEEE8023-SNMP-REPEATER-MIB DEFINITIONS ::= BEGIN

IMPORTS
    Counter32, Counter64, Integer32, Gauge32,
    OBJECT-TYPE, MODULE-IDENTITY, NOTIFICATION-TYPE, org
        FROM SNMPv2-SMI
    TimeStamp, MacAddress, TEXTUAL-CONVENTION,
    RowStatus, TestAndIncr
        FROM SNMPv2-TC
    OBJECT-GROUP, MODULE-COMPLIANCE, NOTIFICATION-GROUP
        FROM SNMPv2-CONF
    OwnerString
        FROM RFC1271-MIB;

ieee8023snmpRptrMIB MODULE-IDENTITY
    LAST-UPDATED "201102020000Z" -- February 2, 2011
    ORGANIZATION
        "IEEE 802.3 working group"
    CONTACT-INFO
        "WG-URL: http://www.ieee802.org/3/index.html
        WG-EMail: STDS-802-3-MIB@LISTSERV.IEEE.ORG

        Contact: Howard Frazier
        Postal: 3151 Zanker Road
                San Jose, CA 95134
                USA
        Tel: +1.408.922.8164
        E-mail: hfrazier@broadcom.com"
    DESCRIPTION
        "Management information for 802.3 repeaters."
    REVISION "201102020000Z" -- February 2, 2011
    DESCRIPTION
        "Initial revision, based on an earlier version in RFC 2108"

    ::= { org ieee(111) standards-association-numbers-series-standards(2)
        lan-man-stds(802) ieee802dot3(3) ieee802dot3dot1mibs(1) 7 }

ieee8023snmpDot3RptrMgt OBJECT IDENTIFIER ::= { ieee8023snmpRptrMIB 1}

OptMacAddr ::= TEXTUAL-CONVENTION
    DISPLAY-HINT "1x:"
    STATUS current
    DESCRIPTION
        "Either a 6 octet address in the 'canonical'
        order defined by IEEE 802.1a, i.e., as if it
        were transmitted least significant bit first
        if a value is available or a zero length string."
    REFERENCE
        "See MacAddress in SNMPv2-TC. The only difference
        is that a zero length string is allowed as a value
        for OptMacAddr and not for MacAddress."
    SYNTAX OCTET STRING (SIZE (0 | 6))

-- Basic information at the repeater, group, and port level.

rptrBasicPackage

```

```

    OBJECT IDENTIFIER ::= { ieee8023snmpDot3RptrMgt 1 }
rptrGroupInfo
    OBJECT IDENTIFIER ::= { rptrBasicPackage 1 }
rptrPortInfo
    OBJECT IDENTIFIER ::= { rptrBasicPackage 2 }
rptrAllRptrInfo
    OBJECT IDENTIFIER ::= { rptrBasicPackage 3 }

-- Monitoring information at the repeater, group, and port level.
rptrMonitorPackage
    OBJECT IDENTIFIER ::= { ieee8023snmpDot3RptrMgt 2 }
rptrMonitorRptrInfo
    OBJECT IDENTIFIER ::= { rptrMonitorPackage 1 }
rptrMonitorGroupInfo
    OBJECT IDENTIFIER ::= { rptrMonitorPackage 2 }
rptrMonitorPortInfo
    OBJECT IDENTIFIER ::= { rptrMonitorPackage 3 }
rptrMonitorAllRptrInfo
    OBJECT IDENTIFIER ::= { rptrMonitorPackage 4 }

-- Address tracking information at the repeater, group,
-- and port level.
rptrAddrTrackPackage
    OBJECT IDENTIFIER ::= { ieee8023snmpDot3RptrMgt 3 }
rptrAddrTrackRptrInfo
    OBJECT IDENTIFIER ::= { rptrAddrTrackPackage 1 }
rptrAddrTrackGroupInfo
    -- this subtree is currently unused
    OBJECT IDENTIFIER ::= { rptrAddrTrackPackage 2 }
rptrAddrTrackPortInfo
    OBJECT IDENTIFIER ::= { rptrAddrTrackPackage 3 }

-- TopN information.
rptrTopNPackage
    OBJECT IDENTIFIER ::= { ieee8023snmpDot3RptrMgt 4 }
rptrTopNRptrInfo
    -- this subtree is currently unused
    OBJECT IDENTIFIER ::= { rptrTopNPackage 1 }
rptrTopNGroupInfo
    -- this subtree is currently unused
    OBJECT IDENTIFIER ::= { rptrTopNPackage 2 }
rptrTopNPortInfo
    OBJECT IDENTIFIER ::= { rptrTopNPackage 3 }

-- Basic information at the group level.
--
-- Configuration and status objects for each
-- managed group in the repeater system, independent
-- of whether there is one or more managed
-- repeater-units in the repeater system.

rptrGroupTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF RptrGroupEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Table of descriptive and status information about
         the groups of ports."
    ::= { rptrGroupInfo 1 }

```

```

rpPtrGroupEntry OBJECT-TYPE
    SYNTAX      RptrGroupEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An entry in the table, containing information
         about a single group of ports."
    INDEX       { rpPtrGroupIndex }
    ::= { rpPtrGroupTable 1 }

RptrGroupEntry ::=
    SEQUENCE {
        rpPtrGroupIndex
            Integer32,
        rpPtrGroupObjectID
            OBJECT IDENTIFIER,
        rpPtrGroupOperStatus
            INTEGER,
        rpPtrGroupPortCapacity
            Integer32
    }

rpPtrGroupIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object identifies the group within the
         repeater system for which this entry contains
         information."
    REFERENCE
        "IEEE Std 802.3, 30.4.2.1.1, aGroupID."
    ::= { rpPtrGroupEntry 1 }

rpPtrGroupObjectID OBJECT-TYPE
    SYNTAX      OBJECT IDENTIFIER
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The vendor's authoritative identification of the
         group. This value may be allocated within the SMI
         enterprises subtree (1.3.6.1.4.1) and provides a
         straight-forward and unambiguous means for
         determining what kind of group is being managed.

         For example, this object could take the value
         1.3.6.1.4.1.4242.1.2.14 if vendor 'Flintstones,
         Inc.' was assigned the subtree 1.3.6.1.4.1.4242,
         and had assigned the identifier
         1.3.6.1.4.1.4242.1.2.14 to its 'Wilma Flintstone
         6-Port FOIRL Plug-in module.'"
    ::= { rpPtrGroupEntry 2 }

rpPtrGroupOperStatus OBJECT-TYPE
    SYNTAX      INTEGER {
        other(1),
        operational(2),
        malfunctioning(3),

```

```

        notPresent(4),
        underTest(5),
        resetInProgress(6)
    }
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "An object that indicates the operational status
    of the group.

    A status of notPresent(4) indicates that the group
    is temporarily or permanently physically and/or
    logically not a part of the repeater. It is an
    implementation-specific matter as to whether the
    agent effectively removes notPresent entries from
    the table.

    A status of operational(2) indicates that the
    group is functioning, and a status of
    malfunctioning(3) indicates that the group is
    malfunctioning in some way."
 ::= { rptrGroupEntry 3 }

rpPtrGroupPortCapacity OBJECT-TYPE
SYNTAX Integer32 (1..2147483647)
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The rpPtrGroupPortCapacity is the number of ports
    that can be contained within the group. Valid
    range is 1-2147483647. Within each group, the
    ports are uniquely numbered in the range from 1 to
    rpPtrGroupPortCapacity.

    Some ports may not be present in the repeater system, in
    which case the actual number of ports present
    will be less than the value of rpPtrGroupPortCapacity.
    The number of ports present in the group will never
    be greater than the value of rpPtrGroupPortCapacity.

    Note: In practice, this will generally be the
    number of ports on a module, card, or board, and
    the port numbers will correspond to numbers marked
    on the physical embodiment."
REFERENCE
    "IEEE 802.3 Mgt, 30.4.2.1.2, aGroupPortCapacity."
 ::= { rpPtrGroupEntry 4 }

-- Basic information at the port level.
--
-- Configuration and status objects for
-- each managed repeater port in the repeater system,
-- independent of whether there is one or more
-- managed repeater-units in the repeater system.

rpPtrPortTable OBJECT-TYPE
SYNTAX SEQUENCE OF RptrPortEntry
MAX-ACCESS not-accessible

```

```

STATUS      current
DESCRIPTION
    "Table of descriptive and status information about
    the repeater ports in the repeater system. The number of
    entries is independent of the number of repeaters
    in the managed repeater system."
 ::= { rpPtrPortInfo 1 }

rpPtrPortEntry OBJECT-TYPE
SYNTAX      RpPtrPortEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "An entry in the table, containing information
    about a single port."

INDEX       { rpPtrPortGroupIndex, rpPtrPortIndex }
 ::= { rpPtrPortTable 1 }

RpPtrPortEntry ::=
SEQUENCE {
    rpPtrPortGroupIndex
        Integer32,
    rpPtrPortIndex
        Integer32,
    rpPtrPortAdminStatus
        INTEGER,
    rpPtrPortAutoPartitionState
        INTEGER,
    rpPtrPortOperStatus
        INTEGER,
    rpPtrPortRpPtrId
        Integer32
}

rpPtrPortGroupIndex OBJECT-TYPE
SYNTAX      Integer32 (1..2147483647)
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This object identifies the group containing the
    port for which this entry contains information."
 ::= { rpPtrPortEntry 1 }

rpPtrPortIndex OBJECT-TYPE
SYNTAX      Integer32 (1..2147483647)
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This object identifies the port within the group
    for which this entry contains information. This
    identifies the port independently from the repeater
    it may be attached to. The numbering scheme for
    ports is implementation specific; however, this
    value can never be greater than
    rpPtrGroupPortCapacity for the associated group."
REFERENCE
    "IEEE Std 802.3, 30.4.3.1.1, aPortID."
 ::= { rpPtrPortEntry 2 }

```

## rptrPortAdminStatus OBJECT-TYPE

```
SYNTAX      INTEGER {
                enabled(1),
                disabled(2)
            }
```

```
MAX-ACCESS  read-write
```

```
STATUS      current
```

## DESCRIPTION

"Setting this object to disabled(2) disables the port. A disabled port neither transmits nor receives. Once disabled, a port shall be explicitly enabled to restore operation. A port which is disabled when power is lost or when a reset is exerted shall remain disabled when normal operation resumes.

The admin status takes precedence over auto-partition and functionally operates between the auto-partition mechanism and the AUI/PMA.

Setting this object to enabled(1) enables the port and exerts a BEGIN on the port's auto-partition state machine.

(In effect, when a port is disabled, the value of rptrPortAutoPartitionState for that port is frozen until the port is next enabled. When the port becomes enabled, the rptrPortAutoPartitionState becomes notAutoPartitioned(1), regardless of its pre-disabling state.)"

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.2, aPortAdminState and 30.4.3.2.1, acPortAdminControl."

```
::= { rptrPortEntry 3 }
```

## rptrPortAutoPartitionState OBJECT-TYPE

```
SYNTAX      INTEGER {
                notAutoPartitioned(1),
                autoPartitioned(2)
            }
```

```
MAX-ACCESS  read-only
```

```
STATUS      current
```

## DESCRIPTION

"The autoPartitionState flag indicates whether the port is currently partitioned by the repeater's auto-partition protection.

The conditions that cause port partitioning are specified in partition state machine in Clauses 9 and 27 of IEEE Std 802.3. They are not differentiated here."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.3, aAutoPartitionState."

```
::= { rptrPortEntry 4 }
```

## rptrPortOperStatus OBJECT-TYPE

```
SYNTAX      INTEGER {
                operational(1),
```

```

        notOperational(2),
        notPresent(3)
    }
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "This object indicates the port's operational
    status. The notPresent(3) status indicates the
    port is physically removed (note this may or may
    not be possible depending on the type of port.)
    The operational(1) status indicates that the port
    is enabled (see rpPtrPortAdminStatus) and working,
    even though it might be auto-partitioned (see
    rpPtrPortAutoPartitionState).

    If this object has the value operational(1) and
    rpPtrPortAdminStatus is set to disabled(2), it is
    expected that this object's value will soon change
    to notOperational(2)."
```

::= { rpPtrPortEntry 5 }

```

rpPtrPortRpPtrId OBJECT-TYPE
    SYNTAX      Integer32 (0..2147483647)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object identifies the repeater to
        which this port belongs. The repeater
        identified by a particular value of this object
        is the same as that identified by the same
        value of rpPtrInfoId. A value of zero
        indicates that this port currently is not
        a member of any repeater."
    ::= { rpPtrPortEntry 6 }
```

```

-- New version of basic information at the repeater level.
--
-- Configuration, status, and control objects for
-- each managed repeater in the repeater system.
```

```

rpPtrInfoTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF RpPtrInfoEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A table of information about each
        non-trivial repeater. The number of entries
        depends on the physical configuration of the
        managed repeater system."
    ::= { rpPtrAllRpPtrInfo 1 }
```

```

rpPtrInfoEntry OBJECT-TYPE
    SYNTAX      RpPtrInfoEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An entry in the table, containing information
        about a single non-trivial repeater."
```

```

INDEX      { rpPtrInfoId }
 ::= { rpPtrInfoTable 1 }

RpPtrInfoEntry ::=
SEQUENCE {
    rpPtrInfoId
        Integer32,
    rpPtrInfoRpPtrType
        INTEGER,
    rpPtrInfoOperStatus
        INTEGER,
    rpPtrInfoReset
        INTEGER,
    rpPtrInfoPartitionedPorts
        Gauge32,
    rpPtrInfoLastChange
        TimeStamp
}

rpPtrInfoId OBJECT-TYPE
SYNTAX      Integer32 (1..2147483647)
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This object identifies the repeater for which
    this entry contains information."
 ::= { rpPtrInfoEntry 1 }

rpPtrInfoRpPtrType OBJECT-TYPE
SYNTAX      INTEGER {
    other(1),          -- undefined or unknown
    tenMb(2),
    onehundredMbClassI(3),
    onehundredMbClassII(4)
}
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The rpPtrInfoRpPtrType returns a value that identifies
    the CSMA/CD repeater type."
REFERENCE
    "IEEE Std 802.3, 30.4.1.1.2, aRepeaterType."
 ::= { rpPtrInfoEntry 2 }

rpPtrInfoOperStatus OBJECT-TYPE
SYNTAX      INTEGER {
    other(1),
    ok(2),
    failure(3)
}
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The rpPtrInfoOperStatus object indicates the
    operational state of the repeater."
REFERENCE
    "IEEE Std 802.3, 30.4.1.1.5, aRepeaterHealthState."
 ::= { rpPtrInfoEntry 3 }

```

```

rpPtrInfoReset OBJECT-TYPE
    SYNTAX      INTEGER {
                    noReset(1),
                    reset(2)
                }
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "Setting this object to reset(2) causes a
        transition to the START state of Figure 9-2 in
        Clause 9 IEEE Std 802.3 for a 10 Mb/s repeater,
        and to the START state of Figure 27-2 in Clause 27
        of that standard for a 100 Mb/s repeater.

        Setting this object to noReset(1) has no effect.
        The agent will always return the value noReset(1)
        when this object is read.

        After receiving a request to set this variable to
        reset(2), the agent is allowed to delay the reset
        for a short period. For example, the implementor
        may choose to delay the reset long enough to allow
        the SNMP response to be transmitted. In any
        event, SNMP requires that a response be transmitted.

        This action does not reset the management counters
        defined in this document nor does it affect the
        portAdminStatus parameters. Included in this
        action is the execution of a disruptive Self-Test
        with the following characteristics: a) The nature
        of the tests is not specified. b) The test resets
        the repeater but without affecting management
        information about the repeater. c) The test does
        not inject packets onto any segment. d) Packets
        received during the test may or may not be
        transferred. e) The test does not interfere with
        management functions.

        After performing this self-test, the agent will
        update the repeater health information (including
        rpPtrInfoOperStatus), and send a rpPtrInfoResetEvent
        notification."
    REFERENCE
        "IEEE Std 802.3, 30.4.1.2.1, acResetRepeater."
    ::= { rpPtrInfoEntry 4 }

rpPtrInfoPartitionedPorts OBJECT-TYPE
    SYNTAX      Gauge32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object returns the total number of ports in
        the repeater whose current state meets all three
        of the following criteria: rpPtrPortOperStatus
        does not have the value notPresent(3),
        rpPtrPortAdminStatus is enabled(1), and
        rpPtrPortAutoPartitionState is autoPartitioned(2)."
    ::= { rpPtrInfoEntry 5 }

```

```

rpPtrInfoLastChange OBJECT-TYPE
    SYNTAX      TimeStamp
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The value of sysUpTime when any of the following
        conditions occurred:
        1) agent cold- or warm-started;
        2) this instance of repeater was created
           (such as when a device or module was
           added to the repeater system);
        3) a change in the value of rpPtrInfoOperStatus;
        4) ports were added or removed as members of
           the repeater; or
        5) any of the counters associated with this
           repeater had a discontinuity."
    ::= { rpPtrInfoEntry 6 }

-- Statistics at the port level.
--

rpPtrMonitorPortTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF RpPtrMonitorPortEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Table of performance and error statistics for the
        ports. The number of entries is the same as that
        in the rpPtrPortTable.

        The columnar object rpPtrMonitorPortLastChange
        is used to indicate possible discontinuities
        of counter type columnar objects in the table."
    ::= { rpPtrMonitorPortInfo 1 }

rpPtrMonitorPortEntry OBJECT-TYPE
    SYNTAX      RpPtrMonitorPortEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An entry in the table, containing performance and
        error statistics for a single port."
    INDEX      { rpPtrMonitorPortGroupIndex, rpPtrMonitorPortIndex }
    ::= { rpPtrMonitorPortTable 1 }

RpPtrMonitorPortEntry ::=
    SEQUENCE {
        rpPtrMonitorPortGroupIndex
            Integer32,
        rpPtrMonitorPortIndex
            Integer32,
        rpPtrMonitorPortReadableFrames
            Counter32,
        rpPtrMonitorPortReadableOctets
            Counter32,
        rpPtrMonitorPortFCSErrors
            Counter32,
        rpPtrMonitorPortAlignmentErrors
            Counter32,
    }

```

```

    rpPtrMonitorPortFrameTooLongs
        Counter32,
    rpPtrMonitorPortShortEvents
        Counter32,
    rpPtrMonitorPortRuntS
        Counter32,
    rpPtrMonitorPortCollisions
        Counter32,
    rpPtrMonitorPortLateEvents
        Counter32,
    rpPtrMonitorPortVeryLongEvents
        Counter32,
    rpPtrMonitorPortDataRateMismatches
        Counter32,
    rpPtrMonitorPortAutoPartitions
        Counter32,
    rpPtrMonitorPortTotalErrors
        Counter32,
    rpPtrMonitorPortLastChange
        TimeStamp
}

rpPtrMonitorPortGroupIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object identifies the group containing the
        port for which this entry contains information."
    ::= { rpPtrMonitorPortEntry 1 }

rpPtrMonitorPortIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This object identifies the port within the group
        for which this entry contains information."
    REFERENCE
        "IEEE Std 802.3, 30.4.3.1.1, aPortID."
    ::= { rpPtrMonitorPortEntry 2 }

rpPtrMonitorPortReadableFrames OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object is the number of frames of valid
        frame length that have been received on this port.
        This counter is incremented by one for each frame
        received on this port whose OctetCount is greater
        than or equal to minFrameSize and less than or
        equal to maxFrameSize (Ref: IEEE 802.3 Std,
        4.4.2.1) and for which the FCSError and
        CollisionEvent signals are not asserted.

        A discontinuity may occur in the value
        when the value of object
        rpPtrMonitorPortLastChange changes."

```

This statistic provides one of the parameters necessary for obtaining the packet error rate. The approximate minimum time for rollover of this counter is 80 hours at 10 Mb/s."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.4, aReadableFrames."

::= { rpPtrMonitorPortEntry 3 }

## rpPtrMonitorPortReadableOctets OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"This object is the number of octets contained in valid frames that have been received on this port. This counter is incremented by OctetCount for each frame received on this port which has been determined to be a readable frame (i.e., including FCS octets but excluding framing bits and dribble bits).

A discontinuity may occur in the value when the value of object rpPtrMonitorPortLastChange changes.

This statistic provides an indicator of the total data transferred. The approximate minimum time for rollover of this counter in a 10 Mb/s repeater is 58 minutes.

For ports receiving traffic at a maximum rate in a 100 Mb/s repeater, this counter can roll over in less than 6 minutes. Since that amount of time could be less than a management station's poll cycle time, in order to avoid a loss of information a management station is advised to also poll the rpPtrMonitorPortUpper32Octets object, or to use the 64-bit counter defined by rpPtrMonitorPortHCRreadableOctets instead of the two 32-bit counters."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.5, aReadableOctets."

::= { rpPtrMonitorPortEntry 4 }

## rpPtrMonitorPortFCSErrors OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"This counter is incremented by one for each frame received on this port with the FCSError signal asserted and the FramingError and CollisionEvent signals deasserted and whose OctetCount is greater than or equal to minFrameSize and less than or equal to maxFrameSize (Ref: 4.4.2.1, IEEE 802.3 Std).

A discontinuity may occur in the value

when the value of object  
rpPtrMonitorPortLastChange changes.

The approximate minimum time for rollover of this  
counter is 80 hours at 10 Mb/s."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.6,  
aFrameCheckSequenceErrors."

::= { rpPtrMonitorPortEntry 5 }

## rpPtrMonitorPortAlignmentErrors OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"This counter is incremented by one for each frame  
received on this port with the FCSError and  
FramingError signals asserted and CollisionEvent  
signal deasserted and whose OctetCount is greater  
than or equal to minFrameSize and less than or  
equal to maxFrameSize (Ref: IEEE 802.3 Std,  
4.4.2.1). If rpPtrMonitorPortAlignmentErrors is  
incremented then the rpPtrMonitorPortFCSErrors  
Counter shall not be incremented for the same  
frame.

A discontinuity may occur in the value  
when the value of object  
rpPtrMonitorPortLastChange changes.

The approximate minimum time for rollover of this  
counter is 80 hours at 10 Mb/s."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.7, aAlignmentErrors."

::= { rpPtrMonitorPortEntry 6 }

## rpPtrMonitorPortFrameTooLongs OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"This counter is incremented by one for each frame  
received on this port whose OctetCount is greater  
than maxFrameSize (Ref: 4.4.2.1, IEEE 802.3 Std).  
If rpPtrMonitorPortFrameTooLongs is incremented  
then neither the rpPtrMonitorPortAlignmentErrors  
nor the rpPtrMonitorPortFCSErrors counter shall be  
incremented for the frame.

A discontinuity may occur in the value  
when the value of object  
rpPtrMonitorPortLastChange changes.

The approximate minimum time for rollover of this  
counter is 61 days in a 10 Mb/s repeater."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.8, aFramesTooLong."

::= { rpPtrMonitorPortEntry 7 }

## rptrMonitorPortShortEvents OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"This counter is incremented by one for each CarrierEvent on this port with ActivityDuration less than ShortEventMaxTime. ShortEventMaxTime is greater than 74 bit times and less than 82 bit times. ShortEventMaxTime has tolerances included to provide for circuit losses between a conformance test point at the AUI and the measurement point within the state machine.

## Notes:

ShortEvents may indicate externally generated noise hits which will cause the repeater to transmit Runts to its other ports, or propagate a collision (which may be late) back to the transmitting DTE and damaged frames to the rest of the network.

Implementors may wish to consider selecting the ShortEventMaxTime towards the lower end of the allowed tolerance range to accommodate bit losses suffered through physical channel devices not budgeted for within this standard.

The significance of this attribute is different in 10 and 100 Mb/s collision domains. Clause 9 repeaters perform fragment extension of short events which would be counted as runts on the interconnect ports of other repeaters. Clause 27 repeaters do not perform fragment extension.

A discontinuity may occur in the value when the value of object rptrMonitorPortLastChange changes.

The approximate minimum time for rollover of this counter is 16 hours in a 10 Mb/s repeater."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.9, aShortEvents."

::= { rptrMonitorPortEntry 8 }

## rptrMonitorPortRunts OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"This counter is incremented by one for each CarrierEvent on this port that meets one of the following two conditions. Only one test need be made. a) The ActivityDuration is greater than ShortEventMaxTime and less than ValidPacketMinTime and the CollisionEvent signal is deasserted. b) The OctetCount is less than 64, the ActivityDuration is greater than ShortEventMaxTime

and the CollisionEvent signal is deasserted.  
ValidPacketMinTime is greater than or equal to 552 bit times and less than 565 bit times.

An event whose length is greater than 74 bit times but less than 82 bit times shall increment either the shortEvents counter or the runts counter but not both. A CarrierEvent greater than or equal to 552 bit times but less than 565 bit times may or may not be counted as a runt.

ValidPacketMinTime has tolerances included to provide for circuit losses between a conformance test point at the AUI and the measurement point within the state machine.

Runts usually indicate collision fragments, a normal network event. In certain situations associated with large diameter networks a percentage of collision fragments may exceed ValidPacketMinTime.

A discontinuity may occur in the value when the value of object rpPtrMonitorPortLastChange changes.

The approximate minimum time for rollover of this counter is 16 hours in a 10 Mb/s repeater."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.10, aRunts."

::= { rpPtrMonitorPortEntry 9 }

## rpPtrMonitorPortCollisions OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"For a Clause 9 repeater, this counter is incremented by one for any CarrierEvent signal on any port for which the CollisionEvent signal on this port is asserted. For a Clause 27 repeater port the counter increments on entering the Collision Count Increment state of the partition state diagram (figure 27-8 of IEEE Std 802.3).

A discontinuity may occur in the value when the value of object rpPtrMonitorPortLastChange changes.

The approximate minimum time for rollover of this counter is 16 hours in a 10 Mb/s repeater."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.11, aCollisions."

::= { rpPtrMonitorPortEntry 10 }

## rpPtrMonitorPortLateEvents OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"For a Clause 9 repeater port, this counter is incremented by one for each CarrierEvent on this port in which the CollIn(X) variable transitions to the value SQE (see 9.6.6.2, IEEE Std 802.3) while the ActivityDuration is greater than the LateEventThreshold. For a Clause 27 repeater port, this counter is incremented by one on entering the Collision Count Increment state of the partition state diagram (Figure 27-8) while the ActivityDuration is greater than the LateEvent- Threshold. Such a CarrierEvent is counted twice, as both a collision and as a lateEvent.

The LateEventThreshold is greater than 480 bit times and less than 565 bit times. LateEventThreshold has tolerances included to permit an implementation to build a single threshold to serve as both the LateEventThreshold and ValidPacketMinTime threshold.

A discontinuity may occur in the value when the value of object rptrMonitorPortLastChange changes.

The approximate minimum time for rollover of this counter is 81 hours in a 10 Mb/s repeater."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.12, aLateEvents."  
 ::= { rptrMonitorPortEntry 11 }

## rptrMonitorPortVeryLongEvents OBJECT-TYPE

SYNTAX Counter32  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION

"For a Clause 9 repeater port, this counter is incremented by one for each CarrierEvent whose ActivityDuration is greater than the MAU Jabber Lockup Protection timer TW3 (see 9.6.1 & 9.6.5, IEEE Std 802.3).

For a Clause 27 repeater port, this counter is incremented by one on entry to the Rx Jabber state of the receiver timer state diagram (Figure 27-7). Other counters may be incremented as appropriate.

A discontinuity may occur in the value when the value of object rptrMonitorPortLastChange changes."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.13, aVeryLongEvents."  
 ::= { rptrMonitorPortEntry 12 }

## rptrMonitorPortDataRateMismatches OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This counter is incremented by one for each frame received by this port that meets all of the conditions required by only one of the following two measurement methods:

Measurement method A: 1) The CollisionEvent signal is not asserted (10 Mb/s operation) or the Collision Count Increment state of the partition state diagram (figure 27-8 of IEEE Std 802.3) has not been entered (100 Mb/s operation). 2) The ActivityDuration is greater than ValidPacketMinTime. 3) The frequency (data rate) is detectably mismatched from the local transmit frequency.

Measurement method B: 1) The CollisionEvent signal is not asserted (10 Mb/s operation) or the Collision Count Increment state of the partition state diagram (figure 27-8 of IEEE Std 802.3) has not been entered (100 Mb/s operation). 2) The OctetCount is greater than 63. 3) The frequency (data rate) is detectably mismatched from the local transmit frequency. The exact degree of mismatch is vendor specific and is to be defined by the vendor for conformance testing.

When this event occurs, other counters whose increment conditions were satisfied may or may not also be incremented, at the implementor's discretion. Whether or not the repeater was able to maintain data integrity is beyond the scope of this standard.

A discontinuity may occur in the value when the value of object  
rptrMonitorPortLastChange changes."

REFERENCE

"IEEE Std 802.3, 30.4.3.1.14, aDataRateMismatches."  
 ::= { rptrMonitorPortEntry 13 }

rptrMonitorPortAutoPartitions OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This counter is incremented by one for each time the repeater has automatically partitioned this port.

The conditions that cause a Clause 9 repeater port to partition are specified in the partition state diagram in Clause 9 of IEEE Std 802.3. They are not differentiated here. A Clause 27 repeater port partitions on entry to the Partition Wait state of the

partition state diagram (Figure 27-8 in IEEE Std 802.3).

A discontinuity may occur in the value when the value of object rpPtrMonitorPortLastChange changes."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.15, aAutoPartitions."

::= { rpPtrMonitorPortEntry 14 }

## rpPtrMonitorPortTotalErrors OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"The total number of errors which have occurred on this port. This counter is the summation of the values of other error counters (for the same port), namely:

rpPtrMonitorPortFCSErrors,  
 rpPtrMonitorPortAlignmentErrors,  
 rpPtrMonitorPortFrameTooLongs,  
 rpPtrMonitorPortShortEvents,  
 rpPtrMonitorPortLateEvents,  
 rpPtrMonitorPortVeryLongEvents,  
 rpPtrMonitorPortDataRateMismatches, and  
 rpPtrMonitorPortSymbolErrors.

This counter is redundant in the sense that it is the summation of information already available through other objects. However, it is included specifically because the regular retrieval of this object as a means of tracking the health of a port provides a considerable optimization of network management traffic over the otherwise necessary retrieval of the summed counters.

Note that rpPtrMonitorPortRunts is not included in this total; this is because runts usually indicate collision fragments, a normal network event.

A discontinuity may occur in the value when the value of object rpPtrMonitorPortLastChange changes."

::= { rpPtrMonitorPortEntry 15 }

## rpPtrMonitorPortLastChange OBJECT-TYPE

SYNTAX TimeStamp

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"The value of sysUpTime when the last of the following occurred:

- 1) the agent cold- or warm-started;
- 2) the row for the port was created (such as when a device or module was added to the repeater system); or

```

        3) any condition that would cause one of
           the counters for the row to experience
           a discontinuity."
 ::= { rpPtrMonitorPortEntry 16 }

rpPtrMonitor100PortTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF RptrMonitor100PortEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Table of additional performance and error
         statistics for 100 Mb/s ports, above and
         beyond those parameters that apply to both
         10 and 100 Mb/s ports. Entries exist only for
         ports attached to 100 Mb/s repeaters.

         The columnar object rpPtrMonitorPortLastChange
         is used to indicate possible discontinuities
         of counter type columnar objects in this table."
 ::= { rpPtrMonitorPortInfo 2 }

rpPtrMonitor100PortEntry OBJECT-TYPE
    SYNTAX      RptrMonitor100PortEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An entry in the table, containing performance
         and error statistics for a single 100 Mb/s port."
    INDEX       { rpPtrMonitorPortGroupIndex, rpPtrMonitorPortIndex }
 ::= { rpPtrMonitor100PortTable 1 }

RptrMonitor100PortEntry ::=
    SEQUENCE {
        rpPtrMonitorPortIsolates
            Counter32,
        rpPtrMonitorPortSymbolErrors
            Counter32,
        rpPtrMonitorPortUpper32Octets
            Counter32,
        rpPtrMonitorPortHCReadableOctets
            Counter64
    }

rpPtrMonitorPortIsolates OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This counter is incremented by one each time that
         the repeater port automatically isolates as a
         consequence of false carrier events. The conditions
         which cause a port to automatically isolate are
         defined by the transition from the False Carrier
         state to the Link Unstable state of the carrier
         integrity state diagram (figure 27-9)
         [IEEE 802.3 Standard].

         Note: Isolates do not affect the value of
         the PortOperStatus object."

```

A discontinuity may occur in the value when the value of object `rpPtrMonitorPortLastChange` changes."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.16, `aIsolates`."  
`::= { rpPtrMonitor100PortEntry 1 }`

`rpPtrMonitorPortSymbolErrors` OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"This counter is incremented by one each time when valid length packet was received at the port and there was at least one occurrence of an invalid data symbol. This can increment only once per valid carrier event. A collision presence at any port of the repeater containing port N, will not cause this attribute to increment.

A discontinuity may occur in the value when the value of object `rpPtrMonitorPortLastChange` changes.

The approximate minimum time for rollover of this counter is 7.4 hours at 100 Mb/s."

## REFERENCE

"IEEE Std 802.3, 30.4.3.1.17,  
`aSymbolErrorDuringPacket`."  
`::= { rpPtrMonitor100PortEntry 2 }`

`rpPtrMonitorPortUpper32Octets` OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"This object is the number of octets contained in valid frames that have been received on this port, modulo  $2^{32}$ . That is, it contains the upper 32 bits of a 64-bit octets counter, of which the lower 32 bits are contained in the `rpPtrMonitorPortReadableOctets` object.

This two-counter mechanism is provided for those network management protocols that do not support 64-bit counters (e.g. SNMP V1) and are used to manage a repeater type of 100 Mb/s.

Conformance clauses for this MIB are defined such that implementation of this object is not required in a repeater system which does not support 100 Mb/s. However, repeater systems with mixed 10 and 100 Mb/s ports may implement this object across all ports, including 10 Mb/s. If this object is implemented, the value shall be a valid count as defined in the first paragraph of this description.

A discontinuity may occur in the value

when the value of object  
 rpPtrMonitorPortLastChange changes."  
 ::= { rpPtrMonitor100PortEntry 3 }

rpPtrMonitorPortHCReadableOctets OBJECT-TYPE

SYNTAX Counter64

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object is the number of octets contained in valid frames that have been received on this port. This counter is incremented by OctetCount for each frame received on this port which has been determined to be a readable frame (i.e., including FCS octets but excluding framing bits and dribble bits).

This statistic provides an indicator of the total data transferred.

This counter is a 64-bit version of rpPtrMonitorPortReadableOctets. It should be used by network management protocols which support 64-bit counters (e.g. SNMPv2).

Conformance clauses for this MIB are defined such that implementation of this object is not required in a repeater system which does not support 100 Mb/s. However, repeater systems with mixed 10 and 100 Mb/s ports may implement this object across all ports, including 10 Mb/s. If this object is implemented, the value shall be a valid count as defined in the first paragraph of this description.

A discontinuity may occur in the value when the value of object  
 rpPtrMonitorPortLastChange changes."

REFERENCE

"IEEE Std 802.3, 30.4.3.1.5, aReadableOctets."

::= { rpPtrMonitor100PortEntry 4 }

-- New version of statistics at the repeater level.

--

-- Statistics objects for each managed repeater

-- in the repeater system.

rpPtrMonTable OBJECT-TYPE

SYNTAX SEQUENCE OF RpPtrMonEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table of information about each non-trivial repeater. The number of entries in this table is the same as the number of entries in the rpPtrInfoTable.

The columnar object rpPtrInfoLastChange is used to indicate possible discontinuities of

```

        counter type columnar objects in this table."
 ::= { rpPtrMonitorAllRpPtrInfo 1 }

rpPtrMonEntry OBJECT-TYPE
    SYNTAX      RpPtrMonEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An entry in the table, containing information
         about a single non-trivial repeater."
    INDEX       { rpPtrInfoId }
 ::= { rpPtrMonTable 1 }

RpPtrMonEntry ::=
    SEQUENCE {
        rpPtrMonTxCollisions
            Counter32,
        rpPtrMonTotalFrames
            Counter32,
        rpPtrMonTotalErrors
            Counter32,
        rpPtrMonTotalOctets
            Counter32
    }

rpPtrMonTxCollisions OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "For a Clause 9 (10 Mb/s) repeater, this counter
         is incremented every time the repeater state
         machine enters the TRANSMIT COLLISION state
         from any state other than ONE PORT LEFT
         (see Figure 9-2 IEEE Std 802.3).

         For a Clause 27 repeater, this counter is
         incremented every time the repeater core state
         diagram enters the Jam state as a result of
         Activity(ALL) > 1 (see Figure 27-2 IEEE Std 802.3).

         The approximate minimum time for rollover of this
         counter is 16 hours in a 10 Mb/s repeater and 1.6
         hours in a 100 Mb/s repeater."
    REFERENCE
        "IEEE Std 802.3, 30.4.1.1.8, aTransmitCollisions"
 ::= { rpPtrMonEntry 1 }

rpPtrMonTotalFrames OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of frames of valid frame length
         that have been received on the ports in this repeater
         and for which the FCSError and CollisionEvent
         signals were not asserted. If an implementation
         can not obtain a count of frames as seen by
         the repeater itself, this counter may be

```

implemented as the summation of the values of the rptrMonitorPortReadableFrames counters for all of the ports in the repeater.

This statistic provides one of the parameters necessary for obtaining the packet error rate. The approximate minimum time for rollover of this counter is 80 hours in a 10 Mb/s repeater."

```
::= { rptrMonEntry 3 }
```

```
rptrMonTotalErrors OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

"The total number of errors which have occurred on all of the ports in this repeater. The errors included in this count are the same as those listed for the rptrMonitorPortTotalErrors counter. If an implementation can not obtain a count of these errors as seen by the repeater itself, this counter may be implemented as the summation of the values of the rptrMonitorPortTotalErrors counters for all of the ports in the repeater."

```
::= { rptrMonEntry 4 }
```

```
rptrMonTotalOctets OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

"The total number of octets contained in the valid frames that have been received on the ports in this group. If an implementation can not obtain a count of octets as seen by the repeater itself, this counter may be the summation of the values of the rptrMonitorPortReadableOctets counters for all of the ports in the group.

This statistic provides an indicator of the total data transferred. The approximate minimum time for rollover of this counter in a 10 Mb/s repeater is 58 minutes divided by the number of ports in the repeater.

For 100 Mb/s repeaters processing traffic at a maximum rate, this counter can roll over in less than 6 minutes divided by the number of ports in the repeater. Since that amount of time could be less than a management station's poll cycle time, in order to avoid a loss of information a management station is advised to also poll the rptrMonUpper32TotalOctets object, or to use the 64-bit counter defined by rptrMonHCTotalOctets instead of the two 32-bit counters."

```
::= { rptrMonEntry 5 }
```

```
rptrMon100Table OBJECT-TYPE
```

```
SYNTAX SEQUENCE OF RptrMon100Entry
```

```

MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "A table of additional information about each
    100 Mb/s repeater, augmenting the entries in
    the rpPtrMonTable. Entries exist in this table
    only for 100 Mb/s repeaters.

    The columnar object rpPtrInfoLastChange is
    used to indicate possible discontinuities of
    counter type columnar objects in this table."
 ::= { rpPtrMonitorAllRpPtrInfo 2 }

```

```

rpPtrMon100Entry OBJECT-TYPE
SYNTAX RpPtrMon100Entry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "An entry in the table, containing information
    about a single 100 Mb/s repeater."
INDEX { rpPtrInfoId }
 ::= { rpPtrMon100Table 1 }

```

```

RpPtrMon100Entry ::=
SEQUENCE {
    rpPtrMonUpper32TotalOctets
        Counter32,
    rpPtrMonHCTotalOctets
        Counter64
}

```

```

rpPtrMonUpper32TotalOctets OBJECT-TYPE
SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The total number of octets contained in the valid
    frames that have been received on the ports in
    this repeater, modulo 2**32. That is, it contains
    the upper 32 bits of a 64-bit counter, of which
    the lower 32 bits are contained in the
    rpPtrMonTotalOctets object. If an implementation
    can not obtain a count of octets as seen
    by the repeater itself, the 64-bit value
    may be the summation of the values of the
    rpPtrMonitorPortReadableOctets counters combined
    with the corresponding rpPtrMonitorPortUpper32Octets
    counters for all of the ports in the repeater.

```

This statistic provides an indicator of the total data transferred within the repeater.

This two-counter mechanism is provided for those network management protocols that do not support 64-bit counters (e.g. SNMP V1) and are used to manage a repeater type of 100 Mb/s.

Conformance clauses for this MIB are defined such that implementation of this object is not required

```

        in a repeater system which does not support 100 Mb/s.
        However, repeater systems with mixed 10 and 100 Mb/s ports
        may implement this object across all ports,
        including 10 Mb/s. If this object is implemented, the
        value shall be a valid count as defined
        in the first paragraph of this description."
 ::= { rpPtrMon100Entry 1 }

rpPtrMonHCTotalOctets OBJECT-TYPE
    SYNTAX      Counter64
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The total number of octets contained in the valid
        frames that have been received on the ports in
        this group. If a implementation can not obtain
        a count of octets as seen by the repeater itself,
        this counter may be the summation of the
        values of the rpPtrMonitorPortReadableOctets
        counters for all of the ports in the group.

        This statistic provides an indicator of the total
        data transferred.

        This counter is a 64-bit (high-capacity) version
        of rpPtrMonUpper32TotalOctets and rpPtrMonTotalOctets.
        It should be used by network management protocols
        which support 64-bit counters (e.g. SNMPv2).

        Conformance clauses for this MIB are defined such
        that implementation of this object is not required
        in a repeater system which does not support 100 Mb/s.
        However, repeater systems with mixed 10 and 100 Mb/s ports
        may implement this object across all ports,
        including 10 Mb/s. If this object is implemented, the
        value shall be a valid count as defined
        in the first paragraph of this description."
 ::= { rpPtrMon100Entry 2 }

--
-- The Repeater Address Search Table
--
-- This table provides an active address tracking
-- capability which can be also used to collect the
-- necessary information for mapping the topology
-- of a network. Note that an NMS is required to have
-- read-write access to the table in order to access
-- this function. Section 4 "Topology Mapping" of
-- IETF RFC 2108 [B19] contains a description of an
-- algorithm which can make use of this table,
-- in combination with the forwarding databases
-- of managed bridges/switches in the network,
-- to map network topology. Devices may also
-- utilise the protocol and a set of managed
-- objects defined in IEEE Std 802.1AB Station
-- and Media Access Control Connectivity
-- Discovery to discover the physical topology
-- from adjacent stations.
```

--

rptrAddrSearchTable OBJECT-TYPE

SYNTAX SEQUENCE OF RptrAddrSearchEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table contains one entry per repeater in the repeater system. It defines objects which allow a network management application to instruct an agent to watch for a given MAC address and report which port it was seen on. Only one address search can be in progress on each repeater at any one time. Before starting an address search, a management application should obtain 'ownership' of the entry in rptrAddrSearchTable for the repeater that is to perform the search. This is accomplished with the rptrAddrSearchLock and rptrAddrSearchStatus as follows:

try\_again:

```

get(rpTrAddrSearchLock, rpTrAddrSearchStatus)
while (rpTrAddrSearchStatus != notInUse)
{
    /* Loop waiting for objects to be available*/
    short delay
    get(rpTrAddrSearchLock, rpTrAddrSearchStatus)
}

/* Try to claim map objects */
lock_value = rpTrAddrSearchLock
if ( set(rpTrAddrSearchLock = lock_value,
        rpTrAddrSearchStatus = inUse,
        rpTrAddrSearchOwner = 'my-IP-address')
    == FAILURE)
    /* Another manager got the lock */
    goto try_again

/* I have the lock */
set (rpTrAddrSearchAddress = <search target>)

wait for rpTrAddrSearchState to change from none

if (rpTrAddrSearchState == single)
    get (rpTrAddrSearchGroup, rpTrAddrSearchPort)
/* release the lock, making sure not to overwrite
   anyone else's lock */
set (rpTrAddrSearchLock = lock_value+1,
    rpTrAddrSearchStatus = notInUse,
    rpTrAddrSearchOwner = '')

```

A management station first retrieves the values of the appropriate instances of the rptrAddrSearchLock and rptrAddrSearchStatus objects, periodically repeating the retrieval if necessary, until the value of rptrAddrSearchStatus is 'notInUse'. The management station then tries to set the same instance of the rptrAddrSearchLock object to the value it just retrieved, the same instance of the

rptrAddrSearchStatus object to 'inUse', and the corresponding instance of rptrAddrSearchOwner to a value indicating itself. If the set operation succeeds, then the management station has obtained ownership of the rptrAddrSearchEntry, and the value of rptrAddrSearchLock is incremented by the agent (as per the semantics of TestAndIncr). Failure of the set operation indicates that some other manager has obtained ownership of the rptrAddrSearchEntry.

Once ownership is obtained, the management station can proceed with the search operation. Note that the agent will reset rptrAddrSearchStatus to 'notInUse' if it has been in the 'inUse' state for an abnormally long period of time, to prevent a misbehaving manager from permanently locking the entry. It is suggested that this timeout period be between one and five minutes.

When the management station has completed its search operation, it should free the entry by setting the instance of the rptrAddrSearchLock object to the previous value + 1, the instance of the rptrAddrSearchStatus to 'notInUse', and the instance of rptrAddrSearchOwner to a zero length string. This is done to prevent overwriting another station's lock."

```
::= { rptrAddrTrackRptrInfo 1 }
```

rptrAddrSearchEntry OBJECT-TYPE

SYNTAX RptrAddrSearchEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry containing objects for invoking an address search on a repeater."

INDEX { rptrInfoId }

```
::= { rptrAddrSearchTable 1 }
```

RptrAddrSearchEntry ::=

```
SEQUENCE {
    rptrAddrSearchLock      TestAndIncr,
    rptrAddrSearchStatus   INTEGER,
    rptrAddrSearchAddress  MacAddress,
    rptrAddrSearchState    INTEGER,
    rptrAddrSearchGroup    Integer32,
    rptrAddrSearchPort     Integer32,
    rptrAddrSearchOwner    OwnerString
}
```

rptrAddrSearchLock OBJECT-TYPE

SYNTAX TestAndIncr

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This object is used by a management station as an advisory lock for this rptrAddrSearchEntry."

```
::= { rptrAddrSearchEntry 1 }
```

```

rptrAddrSearchStatus OBJECT-TYPE
    SYNTAX      INTEGER {
                    notInUse(1),
                    inUse(2)
                }
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "This object is used to indicate that some management
        station is currently using this rptrAddrSearchEntry.
        Cooperating managers should set this object to
        'notInUse' when they are finished using this entry.
        The agent will automatically set the value of this
        object to 'notInUse' if it has been set to 'inUse'
        for an unusually long period of time."
    ::= { rptrAddrSearchEntry 2 }

rptrAddrSearchAddress OBJECT-TYPE
    SYNTAX      MacAddress
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "This object is used to search for a specified MAC
        address. When this object is set, an address search
        begins. This automatically sets the corresponding
        instance of the rptrAddrSearchState object to 'none'
        and the corresponding instances of the
        rptrAddrSearchGroup and rptrAddrSearchPort objects to
        0.

        When a valid frame is received by this repeater with
        a source MAC address which matches the current value
        of rptrAddrSearchAddress, the agent will update the
        corresponding instances of rptrAddrSearchState,
        rptrAddrSearchGroup and rptrAddrSearchPort to reflect
        the current status of the search, and the group and
        port on which the frame was seen."
    ::= { rptrAddrSearchEntry 3 }

rptrAddrSearchState OBJECT-TYPE
    SYNTAX      INTEGER {
                    none(1),
                    single(2),
                    multiple(3)
                }
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The current state of the MAC address search on this
        repeater. This object is initialized to 'none' when
        the corresponding instance of rptrAddrSearchAddress
        is set. If the agent detects the address on exactly
        one port, it will set this object to 'single', and
        set the corresponding instances of
        rptrAddrSearchGroup and rptrAddrSearchPort to reflect
        the group and port on which the address was heard.
        If the agent detects the address on more than one
        port, it will set this object to 'multiple'."

```

```

 ::= { rptrAddrSearchEntry 4 }

rptrAddrSearchGroup OBJECT-TYPE
    SYNTAX      Integer32 (0..2147483647)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The group from which an error-free frame whose
        source address is equal to the corresponding instance
        of rptrAddrSearchAddress has been received. The
        value of this object is undefined when the
        corresponding instance of rptrAddrSearchState is
        equal to 'none' or 'multiple'."
 ::= { rptrAddrSearchEntry 5 }

rptrAddrSearchPort OBJECT-TYPE
    SYNTAX      Integer32 (0..2147483647)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The port rom which an error-free frame whose
        source address is equal to the corresponding instance
        of rptrAddrSearchAddress has been received. The
        value of this object is undefined when the
        corresponding instance of rptrAddrSearchState is
        equal to 'none' or 'multiple'."
 ::= { rptrAddrSearchEntry 6 }

rptrAddrSearchOwner OBJECT-TYPE
    SYNTAX      OwnerString
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "The entity which currently has 'ownership' of this
        rptrAddrSearchEntry."
 ::= { rptrAddrSearchEntry 7 }

--
-- The Port Address Tracking Table
--
-- This table provides a way for a network management
-- application to passively gather information (using
-- read-only privileges) about which network addresses
-- are connected to which ports of a repeater.
--

rptrAddrTrackTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF RptrAddrTrackEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "Table of address mapping information about the
        ports."
 ::= { rptrAddrTrackPortInfo 1 }

rptrAddrTrackEntry OBJECT-TYPE
    SYNTAX      RptrAddrTrackEntry
    MAX-ACCESS  not-accessible

```

```

STATUS      current
DESCRIPTION
    "An entry in the table, containing address mapping
    information about a single port."
INDEX      { rptrAddrTrackGroupIndex, rptrAddrTrackPortIndex }
 ::= { rptrAddrTrackTable 1 }

RptrAddrTrackEntry ::=
SEQUENCE {
    rptrAddrTrackGroupIndex
        INTEGER,
    rptrAddrTrackPortIndex
        INTEGER,
    rptrAddrTrackSourceAddrChanges
        Counter32,
    rptrAddrTrackNewLastSrcAddress
        OptMacAddr,
    rptrAddrTrackCapacity
        Integer32
}

rptrAddrTrackGroupIndex OBJECT-TYPE
SYNTAX      Integer32 (1..2147483647)
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This object identifies the group containing the
    port for which this entry contains information."
 ::= { rptrAddrTrackEntry 1 }

rptrAddrTrackPortIndex OBJECT-TYPE
SYNTAX      Integer32 (1..2147483647)
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This object identifies the port within the group
    for which this entry contains information."
REFERENCE
    "IEEE Std 802.3, 30.4.3.1.1, aPortID."
 ::= { rptrAddrTrackEntry 2 }

rptrAddrTrackSourceAddrChanges OBJECT-TYPE
SYNTAX      Counter32
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "This counter is incremented by one for each time
    that the rptrAddrTrackNewLastSrcAddress attribute
    for this port has changed.

    This may indicate whether a link is connected to a
    single DTE or another multi-user segment.

    A discontinuity may occur in the value when the
    value of object rptrMonitorPortLastChange changes.

    The approximate minimum time for rollover of this
    counter is 81 hours in a 10 Mb/s repeater."
REFERENCE

```

```

    "IEEE Std 802.3, 30.4.3.1.19, aSourceAddressChanges."
 ::= { rptrAddrTrackEntry 3 }

```

```
rptrAddrTrackNewLastSrcAddress OBJECT-TYPE
```

```
SYNTAX      OptMacAddr
```

```
MAX-ACCESS  read-only
```

```
STATUS      current
```

```
DESCRIPTION
```

"This object is the SourceAddress of the last readable frame (i.e., counted by rptrMonitorPortReadableFrames) received by this port. If no frames have been received by this port since the agent began monitoring the port activity, the agent shall return a string of length zero."

```
REFERENCE
```

"IEEE Std 802.3, 30.4.3.1.18, aLastSourceAddress."

```
 ::= { rptrAddrTrackEntry 4 }

```

```
rptrAddrTrackCapacity OBJECT-TYPE
```

```
SYNTAX      Integer32
```

```
MAX-ACCESS  read-only
```

```
STATUS      current
```

```
DESCRIPTION
```

"The maximum number of addresses that can be detected on this port. This value indicates to the maximum number of entries in the rptrExtAddrTrackTable relative to this port."

If this object has the value of 1, the agent implements only the LastSourceAddress mechanism described by RFC 1368 or RFC 1516."

```
 ::= { rptrAddrTrackEntry 5 }

```

```
-- Table for multiple addresses per port
```

```
rptrExtAddrTrackTable OBJECT-TYPE
```

```
SYNTAX      SEQUENCE OF RptrExtAddrTrackEntry
```

```
MAX-ACCESS  not-accessible
```

```
STATUS      current
```

```
DESCRIPTION
```

"A table to extend the address tracking table (i.e., rptrAddrTrackTable) with a list of source MAC addresses that were recently received on each port. The number of ports is the same as the number of entries in table rptrPortTable. The number of entries in this table depends on the agent/repeater implementation and the number of different addresses received on each port."

The first entry for each port contains the same MAC address that is given by the rptrAddrTrackNewLastSrcAddress for that port."

Entries in this table for a particular port are retained when that port is switched from one repeater to another."

```

        The ordering of MAC addresses listed for a
        particular port is implementation dependent."
 ::= { rpPtrAddrTrackPortInfo 2 }

rpPtrExtAddrTrackEntry OBJECT-TYPE
    SYNTAX      RpPtrExtAddrTrackEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A row in the table of extended address tracking
        information for ports. Entries can not be directly
        created or deleted via SNMP operations."
    INDEX       { rpPtrAddrTrackGroupIndex,
                 rpPtrAddrTrackPortIndex,
                 rpPtrExtAddrTrackMacIndex }
 ::= { rpPtrExtAddrTrackTable 1 }

RpPtrExtAddrTrackEntry ::= SEQUENCE {
    rpPtrExtAddrTrackMacIndex Integer32,
    rpPtrExtAddrTrackSourceAddress MacAddress
}

rpPtrExtAddrTrackMacIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "The index of a source MAC address seen on
        the port.

        The ordering of MAC addresses listed for a
        particular port is implementation dependent.

        There is no implied relationship between a
        particular index and a particular MAC
        address. The index for a particular MAC
        address may change without notice."
 ::= { rpPtrExtAddrTrackEntry 1 }

rpPtrExtAddrTrackSourceAddress OBJECT-TYPE
    SYNTAX      MacAddress
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The source MAC address from a readable frame
        (i.e., counted by rpPtrMonitorPortReadableFrames)
        recently received by the port."
    REFERENCE
        "IEEE Std 802.3, 30.4.3.1.18, aLastSourceAddress."
 ::= { rpPtrExtAddrTrackEntry 2 }

-- The Repeater Top "N" Port Group
-- The Repeater Top N Port group is used to prepare reports that
-- describe a list of ports ordered by one of the statistics in the
-- Repeater Monitor Port Table. The statistic chosen by the
-- management station is sampled over a management
-- station-specified time interval, making the report rate based.
-- The management station also specifies the number of ports that

```

```

-- are reported.
--
-- The rpPtrTopNPortControlTable is used to initiate the generation
-- of a report. The management station may select the parameters
-- of such a report, such as which repeater, which statistic, how
-- many ports, and the start & stop times of the sampling. When
-- the report is prepared, entries are created in the
-- rpPtrTopNPortTable associated with the relevant
-- rpPtrTopNControlEntry. These entries are static for
-- each report after it has been prepared.

-- Note that counter discontinuities may appear in some
-- implementations if ports' assignment to repeaters changes
-- during the collection of data for a Top "N" report.
-- A management application could read the corresponding
-- rpPtrMonitorPortLastChange timestamp in order to check
-- whether a discontinuity occurred.

rpPtrTopNPortControlTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF RpPtrTopNPortControlEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "A table of control records for reports on the top 'N'
        ports for the rate of a selected counter. The number
        of entries depends on the configuration of the agent.
        The maximum number of entries is implementation
        dependent."
    ::= { rpPtrTopNPortInfo 1 }

rpPtrTopNPortControlEntry OBJECT-TYPE
    SYNTAX          RpPtrTopNPortControlEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "A set of parameters that control the creation of a
        report of the top N ports according to several metrics."
    INDEX          { rpPtrTopNPortControlIndex }
    ::= { rpPtrTopNPortControlTable 1 }

RpPtrTopNPortControlEntry ::= SEQUENCE {
    rpPtrTopNPortControlIndex
        Integer32,
    rpPtrTopNPortRepeaterId
        Integer32,
    rpPtrTopNPortRateBase
        INTEGER,
    rpPtrTopNPortTimeRemaining
        Integer32,
    rpPtrTopNPortDuration
        Integer32,
    rpPtrTopNPortRequestedSize
        Integer32,
    rpPtrTopNPortGrantedSize
        Integer32,
    rpPtrTopNPortStartTime
        TimeStamp,
    rpPtrTopNPortOwner

```

```

        OwnerString,
    rpPtrTopNPortRowStatus
        RowStatus
    }

rpPtrTopNPortControlIndex OBJECT-TYPE
    SYNTAX      Integer32 (1 .. 65535)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An index that uniquely identifies an entry in the
        rpPtrTopNPortControl table. Each such entry defines
        one top N report prepared for a repeater or repeater system."
    ::= { rpPtrTopNPortControlEntry 1 }

rpPtrTopNPortRepeaterId OBJECT-TYPE
    SYNTAX      Integer32 (0..2147483647)
    MAX-ACCESS  read-create
    STATUS      current
    DESCRIPTION
        "Identifies the repeater for which a top N report will
        be prepared (see rpPtrInfoId). If the value of this
        object is positive, only ports assigned to this repeater
        will be used to form the list in which to order the
        Top N table. If this value is zero, all ports will be
        eligible for inclusion on the list.

        The value of this object may not be modified if the
        associated rpPtrTopNPortRowStatus object is equal to
        active(1).

        If, for a particular row in this table, the repeater
        specified by the value of this object goes away (is
        removed from the rpPtrInfoTable) while the associated
        rpPtrTopNPortRowStatus object is equal to active(1),
        the row in this table is preserved by the agent but
        the value of rpPtrTopNPortRowStatus is changed to
        notInService(2), and the agent may time out the row
        if appropriate. If the specified repeater comes
        back (reappears in the rpPtrInfoTable) before the row
        has been timed out, the management station sets
        the value of the rpPtrTopNPortRowStatus object back
        to active(1) if desired (the agent doesn't do this
        automatically)."
```

```

    ::= { rpPtrTopNPortControlEntry 2 }

rpPtrTopNPortRateBase OBJECT-TYPE
    SYNTAX      INTEGER {
        readableFrames(1),
        readableOctets(2),
        fcsErrors(3),
        alignmentErrors(4),
        frameTooLongs(5),
        shortEvents(6),
        runts(7),
        collisions(8),
        lateEvents(9),
        veryLongEvents(10),
        dataRateMismatches(11),
        autoPartitions(12),

```

```

        totalErrors(13),
        isolates(14),
        symbolErrors(15)
    }
MAX-ACCESS read-create
STATUS current
DESCRIPTION
    "The monitored variable, which the rpPtrTopNPortRate
    variable is based upon.

    The value of this object may not be modified if
    the associated rpPtrTopNPortRowStatus object has
    a value of active(1)."
```

::= { rpPtrTopNPortControlEntry 3 }

```

rpPtrTopNPortTimeRemaining OBJECT-TYPE
SYNTAX Integer32 (0..2147483647)
MAX-ACCESS read-create
STATUS current
DESCRIPTION
    "The number of seconds left in the report
    currently being collected. When this object
    is modified by the management station, a new
    collection is started, possibly aborting a
    currently running report. The new value is
    used as the requested duration of this report,
    which is loaded into the associated
    rpPtrTopNPortDuration object.

    When this object is set to a non-zero value,
    any associated rpPtrTopNPortEntries shall be
    made inaccessible by the agent. While the value
    of this object is non-zero, it decrements by one
    per second until it reaches zero. During this
    time, all associated rpPtrTopNPortEntries shall
    remain inaccessible. At the time that this object
    decrements to zero, the report is made accessible
    in the rpPtrTopNPortTable. Thus, the rpPtrTopNPort
    table needs to be created only at the end of the
    collection interval.

    If the value of this object is set to zero
    while the associated report is running, the
    running report is aborted and no associated
    rpPtrTopNPortEntries are created."
```

DEFVAL { 0 }

::= { rpPtrTopNPortControlEntry 4 }

```

rpPtrTopNPortDuration OBJECT-TYPE
SYNTAX Integer32 (0..2147483647)
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The number of seconds that this report has
    collected during the last sampling interval,
    or if this report is currently being collected,
    the number of seconds that this report is being
    collected during this sampling interval."
```

When the associated `rpPtrTopNPortTimeRemaining` object is set, this object shall be set by the agent to the same value and shall not be modified until the next time the `rpPtrTopNPortTimeRemaining` is set.

This value shall be zero if no reports have been requested for this `rpPtrTopNPortControlEntry`."

```
::= { rpPtrTopNPortControlEntry 5 }
```

```
rpPtrTopNPortRequestedSize OBJECT-TYPE
```

```
SYNTAX      Integer32
MAX-ACCESS  read-create
STATUS      current
```

```
DESCRIPTION
```

"The maximum number of repeater ports requested for the Top N Table.

When this object is created or modified, the agent should set `rpPtrTopNPortGrantedSize` as close to this object as is possible for the particular implementation and available resources."

```
DEFVAL { 10 }
```

```
::= { rpPtrTopNPortControlEntry 6 }
```

```
rpPtrTopNPortGrantedSize OBJECT-TYPE
```

```
SYNTAX      Integer32 (0..65535)
MAX-ACCESS  read-only
STATUS      current
```

```
DESCRIPTION
```

"The maximum number of repeater ports in the top N table.

When the associated `rpPtrTopNPortRequestedSize` object is created or modified, the agent should set this object as closely to the requested value as is possible for the particular implementation and available resources. The agent shall not lower this value except as a result of a set to the associated `rpPtrTopNPortRequestedSize` object."

```
::= { rpPtrTopNPortControlEntry 7 }
```

```
rpPtrTopNPortStartTime OBJECT-TYPE
```

```
SYNTAX      TimeStamp
MAX-ACCESS  read-only
STATUS      current
```

```
DESCRIPTION
```

"The value of `sysUpTime` when this top N report was last started. In other words, this is the time that the associated `rpPtrTopNPortTimeRemaining` object was modified to start the requested report.

If the report has not yet been started, the value of this object is zero."

```
::= { rpPtrTopNPortControlEntry 8 }
```

```
rpPtrTopNPortOwner OBJECT-TYPE
```

```
SYNTAX      OwnerString
MAX-ACCESS  read-create
STATUS      current
```

```

DESCRIPTION
    "The entity that configured this entry and is
    using the resources assigned to it."
 ::= { rpPtrTopNPortControlEntry 9 }

rpPtrTopNPortRowStatus OBJECT-TYPE
SYNTAX      RowStatus
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    "The status of this row.

    If the value of this object is not equal to
    active(1), all associated entries in the
    rpPtrTopNPortTable shall be deleted by the
    agent."
 ::= { rpPtrTopNPortControlEntry 10 }

-- Top "N" reports

rpPtrTopNPortTable OBJECT-TYPE
SYNTAX      SEQUENCE OF RpPtrTopNPortEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "A table of reports for the top 'N' ports based on
    setting of associated control table entries. The
    maximum number of entries depends on the number
    of entries in table rpPtrTopNPortControlTable and
    the value of object rpPtrTopNPortGrantedSize for
    each entry.

    For each entry in the rpPtrTopNPortControlTable,
    repeater ports with the highest value of
    rpPtrTopNPortRate shall be placed in this table
    in decreasing order of that rate until there is
    no more room or until there are no more ports."
 ::= { rpPtrTopNPortInfo 2 }

rpPtrTopNPortEntry OBJECT-TYPE
SYNTAX      RpPtrTopNPortEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "A set of statistics for a repeater port that is
    part of a top N report."
INDEX       { rpPtrTopNPortControlIndex,
              rpPtrTopNPortIndex }
 ::= { rpPtrTopNPortTable 1 }

RpPtrTopNPortEntry ::= SEQUENCE {
    rpPtrTopNPortIndex
        Integer32,
    rpPtrTopNPortGroupIndex
        Integer32,
    rpPtrTopNPortPortIndex
        Integer32,
    rpPtrTopNPortRate

```

```

    Gauge32
}

rpPtrTopNPortIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..65535)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An index that uniquely identifies an entry in
        the rpPtrTopNPort table among those in the same
        report. This index is between 1 and N, where N
        is the number of entries in this report. Increasing
        values of rpPtrTopNPortIndex shall be assigned to
        entries with decreasing values of rpPtrTopNPortRate
        until index N is assigned to the entry with the
        lowest value of rpPtrTopNPortRate or there are no
        more rpPtrTopNPortEntries.

        No ports are included in a report where their
        value of rpPtrTopNPortRate would be zero."
    ::= { rpPtrTopNPortEntry 1 }

rpPtrTopNPortGroupIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "This object identifies the group containing
        the port for this entry. (See also object
        type rpPtrGroupIndex.)"
    ::= { rpPtrTopNPortEntry 2 }

rpPtrTopNPortPortIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The index of the repeater port.
        (See object type rpPtrPortIndex.)"
    ::= { rpPtrTopNPortEntry 3 }

rpPtrTopNPortRate OBJECT-TYPE
    SYNTAX      Gauge32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The amount of change in the selected variable
        during this sampling interval for the identified
        port. The selected variable is that port's
        instance of the object selected by
        rpPtrTopNPortRateBase."
    ::= { rpPtrTopNPortEntry 4 }

-- Notifications for use by Repeaters
-- Notifications for repeaters in a multiple-repeater implementation.
-- An implementation may send either the single-repeater OR
-- multiple-repeater version of these notifications (1 or 4; 2 or 5)

```

```
-- but not both.

ieee8023snmpDot3RpPtrNotifications OBJECT IDENTIFIER
    ::= { ieee8023snmpDot3RpPtrMgt 0 }

rpPtrInfoHealth NOTIFICATION-TYPE
    OBJECTS      { rpPtrInfoOperStatus }
    STATUS       current
    DESCRIPTION
        "In a repeater system containing multiple managed repeaters,
        the rpPtrInfoHealth notification conveys information
        related to the operational status of a repeater.
        It is sent either when the value of rpPtrInfoOperStatus
        changes, or upon completion of a non-disruptive test.

        The agent shall limit the generation of
        consecutive rpPtrInfoHealth notifications for
        the same repeater so that there is at least
        a five-second gap between notifications of this type.
        When notifications are throttled, they are dropped,
        not queued for sending at a future time. (Note
        that 'generating' a notification means sending
        to all configured recipients.)"
    REFERENCE
        "IEEE Std 802.3, 30.4.1.3.1, nRepeaterHealth
        notification."
    ::= { ieee8023snmpDot3RpPtrNotifications 4 }

rpPtrInfoResetEvent NOTIFICATION-TYPE
    OBJECTS      { rpPtrInfoOperStatus }
    STATUS       current
    DESCRIPTION
        "In a repeater system containing multiple managed
        repeaters, the rpPtrInfoResetEvent notification
        conveys information related to the operational
        status of a repeater. This notification is sent
        on completion of a repeater reset action. A
        repeater reset action is defined as a transition
        to the START state of Figure 9-2 in Clause 9 of
        IEEE Std 802.3, when triggered by a management
        command (e.g., an SNMP Set on the rpPtrInfoReset
        object).

        The agent shall limit the generation of
        consecutive rpPtrInfoResetEvent notifications for
        a single repeater so that there is at least
        a five-second gap between notifications of
        this type. When notifications are throttled,
        they are dropped, not queued for sending at
        a future time. (Note that 'generating' a
        notification means sending to all configured
        recipients.)

        The rpPtrInfoResetEvent is not sent when the
        agent restarts and sends an SNMP coldStart or
        warmStart trap. However, it is recommended that
        a repeater agent send the rpPtrInfoOperStatus
        object as an optional object with its coldStart
        and warmStart trap PDUs."
```

```

REFERENCE
    "IEEE Std 802.3, 30.4.1.3.2, nRepeaterReset
    notification."
 ::= { ieee8023snmpDot3RptrNotifications 5 }

-- Conformance statements

snmpRptrModConf
    OBJECT IDENTIFIER ::= { ieee8023snmpRptrMIB 2 }
snmpRptrModCompls
    OBJECT IDENTIFIER ::= { snmpRptrModConf 1 }
snmpRptrModObjGrps
    OBJECT IDENTIFIER ::= { snmpRptrModConf 2 }
snmpRptrModNotGrps
    OBJECT IDENTIFIER ::= { snmpRptrModConf 3 }

-- Object groups

snmpRptrGrpBasic OBJECT-GROUP
    OBJECTS      { rptrGroupObjectID,
                  rptrGroupOperStatus,
                  rptrGroupPortCapacity,
                  rptrPortAdminStatus,
                  rptrPortAutoPartitionState,
                  rptrPortOperStatus,
                  rptrPortRptrId,
                  rptrInfoRptrType,
                  rptrInfoOperStatus,
                  rptrInfoReset,
                  rptrInfoPartitionedPorts,
                  rptrInfoLastChange }
    STATUS      current
    DESCRIPTION
        "Basic group for a repeater system with one or more
        repeater-units in multi-segment (post-RFC 1516)
        version of the MIB module."
    ::= { snmpRptrModObjGrps 1 }

snmpRptrGrpMonitor OBJECT-GROUP
    OBJECTS      { rptrMonitorPortReadableFrames,
                  rptrMonitorPortReadableOctets,
                  rptrMonitorPortFCSErrors,
                  rptrMonitorPortAlignmentErrors,
                  rptrMonitorPortFrameTooLongs,
                  rptrMonitorPortShortEvents,
                  rptrMonitorPortRunts,
                  rptrMonitorPortCollisions,
                  rptrMonitorPortLateEvents,
                  rptrMonitorPortVeryLongEvents,
                  rptrMonitorPortDataRateMismatches,
                  rptrMonitorPortAutoPartitions,
                  rptrMonitorPortTotalErrors,
                  rptrMonitorPortLastChange,

                  rptrMonTxCollisions,
                  rptrMonTotalFrames,
                  rptrMonTotalErrors,

```

```

        rpPtrMonTotalOctets }
STATUS      current
DESCRIPTION
    "Monitor group for a repeater system with one or more
    repeater-units in multi-segment (post-RFC 1516)
    version of the MIB module."
 ::= { snmpRptrModObjGrps 2 }

snmpRptrGrpMonitor100 OBJECT-GROUP
OBJECTS     { rpPtrMonitorPortIsolates,
              rpPtrMonitorPortSymbolErrors,
              rpPtrMonitorPortUpper32Octets,

              rpPtrMonUpper32TotalOctets }
STATUS      current
DESCRIPTION
    "Monitor group for 100 Mb/s ports and repeaters
    in a repeater system with one or more repeater-units in
    multi-segment (post-RFC 1516) version of the MIB
    module. Repeater systems which support Counter64 should
    also implement snmpRptrGrpMonitor100w64."
 ::= { snmpRptrModObjGrps 3 }

snmpRptrGrpMonitor100w64 OBJECT-GROUP
OBJECTS     { rpPtrMonitorPortHCReadableOctets,
              rpPtrMonHCTotalOctets }
STATUS      current
DESCRIPTION
    "Monitor group for 100 Mb/s ports and repeaters in a
    repeater system with one or more repeater-units and support
    for Counter64."
 ::= { snmpRptrModObjGrps 4 }

snmpRptrGrpAddrTrack OBJECT-GROUP
OBJECTS     { rpPtrAddrTrackSourceAddrChanges,
              rpPtrAddrTrackNewLastSrcAddress,
              rpPtrAddrTrackCapacity }
STATUS      current
DESCRIPTION
    "Passive address tracking group for post-RFC 1516
    version of the MIB module."
 ::= { snmpRptrModObjGrps 5 }

snmpRptrGrpExtAddrTrack OBJECT-GROUP
OBJECTS     { rpPtrExtAddrTrackSourceAddress }
STATUS      current
DESCRIPTION
    "Extended passive address tracking group for
    a repeater system with one or more repeater-units in
    post-RFC 1516 version of the MIB module."
 ::= { snmpRptrModObjGrps 6 }

snmpRptrGrpRptrAddrSearch OBJECT-GROUP
OBJECTS     { rpPtrAddrSearchLock,
              rpPtrAddrSearchStatus,
              rpPtrAddrSearchAddress,
              rpPtrAddrSearchState,
              rpPtrAddrSearchGroup,
              rpPtrAddrSearchPort,

```

```

        rptrAddrSearchOwner }
STATUS      current
DESCRIPTION
    "Active MAC address search group and topology
    mapping support for repeaters."
 ::= { snmpRptrModObjGrps 7 }

snmpRptrGrpTopNPort OBJECT-GROUP
OBJECTS     { rptrTopNPortRepeaterId,
              rptrTopNPortRateBase,
              rptrTopNPortTimeRemaining,
              rptrTopNPortDuration,
              rptrTopNPortRequestedSize,
              rptrTopNPortGrantedSize,
              rptrTopNPortStartTime,
              rptrTopNPortOwner,
              rptrTopNPortRowStatus,
              rptrTopNPortGroupIndex,
              rptrTopNPortPortIndex,
              rptrTopNPortRate }
STATUS      current
DESCRIPTION
    "Top 'N' group for repeater ports."
 ::= { snmpRptrModObjGrps 8 }

ieee8023snmpDot3RptrNotGroup NOTIFICATION-GROUP
NOTIFICATIONS { rptrInfoHealth,
                rptrInfoResetEvent }
STATUS      current
DESCRIPTION
    "Conformance Group for repeater notifications.
    Formerly an empty group."
 ::= {snmpRptrModNotGrps 1}

-- Compliance statements

snmpRptrModCompl MODULE-COMPLIANCE
STATUS      current
DESCRIPTION
    "Compliance for the multi-segment version of the
    MIB module for a repeater system with one or more
    repeater-units."

MODULE -- this module
MANDATORY-GROUPS { snmpRptrGrpBasic,
                   snmpRptrGrpMonitor,
                   snmpRptrGrpAddrTrack }

GROUP snmpRptrGrpMonitor100
DESCRIPTION
    "Implementation of this group is
    mandatory for managed repeater systems which
    contain 100 Mb/s repeaters."

GROUP snmpRptrGrpMonitor100w64
DESCRIPTION
    "Implementation of this group is
    mandatory for managed repeater systems which

```

contain 100 Mb/s repeaters and which  
can support Counter64."

GROUP snmpRptrGrpExtAddrTrack

DESCRIPTION

"Implementation of this group is  
recommended for repeater systems which have  
the necessary instrumentation to track  
MAC addresses of multiple DTEs attached  
to a single repeater port."

GROUP snmpRptrGrpRptrAddrSearch

DESCRIPTION

"Implementation of this group is  
recommended for repeater systems which allow  
read-write access and which have  
the necessary instrumentation to  
search all incoming data streams  
for a particular MAC address."

GROUP snmpRptrGrpTopNPort

DESCRIPTION

"Implementation of this group is  
recommended for repeater systems which have  
the necessary resources to support  
TopN statistics reporting."

GROUP ieee8023snmpDot3RptrNotGroup

DESCRIPTION

"Implementation of this group is  
recommended for repeaters that  
support notifications."

::= { snmpRptrModCompls 1 }

END



## 8. Ethernet data terminal equipment (DTE) power via medium dependent interface (MDI) MIB module

### 8.1 Introduction

This clause defines a portion of the Management Information Base (MIB) for use with SNMP. In particular, it defines a set of MIB objects to manage Power via MDI Power Sourcing Equipment (PSE).

### 8.2 Overview

IEEE Std 802.3 defines the hardware registers that will allow for management interfaces to be built for a powered Ethernet device. The MIB module defined in this clause extends the Ethernet-like interface MIB defined in Clause 10 with the management objects required for the management of the powered Ethernet devices and ports.

### 8.3 MIB structure

These MIB objects are categorized into three MIB groups.

The `pethPsePortTable` defines the objects used for configuring and describing the status of ports on a PSE device. Examples of PSE devices are Ethernet switches that support power Ethernet and mid-span boxes.

The `pethMainPseObjects` MIB group defines the management objects for a managed main power source in a PSE device. Ethernet switches are one example of boxes that would support these objects.

The `pethNotificationControlTable` includes objects that control the transmission of notifications from the agent to a management application.

### 8.4 Security considerations for Ethernet data terminal equipment (DTE) power via medium dependent interface (MDI) MIB module.

There are a number of management objects defined in this MIB module with a MAX-ACCESS clause of read-write. Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations.

Setting the following object to incorrect values can result in improper operation of the PSE, including the possibility that the PD does not receive power from the PSE port:

- `pethPsePortAdminEnable`
- `pethPsePortPowerPairs`
- `pethPsePortPowerPriority`
- `pethPsePortType`

Setting the following objects to incorrect values can result in an excessive number of traps being sent to network management stations:

- `pethMainPseUsageThreshold`
- `pethNotificationControlEnable`

Some of the readable objects in this MIB module (i.e., objects with a MAX-ACCESS other than not-accessible) may be considered sensitive or vulnerable in some network environments. These are as follows:

- pethPsePortPowerPairsControlAbility
- pethPsePortPowerPriority
- pethPsePortPowerClassifications

It is thus important to control GET and/or NOTIFY access to these objects and possibly to encrypt their values when sending them over the network via SNMP.

### 8.5 MIB module definition

An ASCII text version of the MIB definition can be found at the following URL:<sup>14</sup>

[http://www.ieee802.org/3/be/public/mib\\_modules/20110202/802dot3dot1C8mib.txt](http://www.ieee802.org/3/be/public/mib_modules/20110202/802dot3dot1C8mib.txt)

---

<sup>14</sup>Copyright release for MIB modules: Users of this standard may freely reproduce the MIB module contained in this subclause so that it can be used for its intended purpose.

```

IEEE8023-POWER-ETHERNET-MIB DEFINITIONS ::= BEGIN

IMPORTS
    MODULE-IDENTITY, OBJECT-TYPE, Integer32,
    Gauge32, Counter32, NOTIFICATION-TYPE, org
        FROM SNMPv2-SMI
    TruthValue
        FROM SNMPv2-TC
    MODULE-COMPLIANCE, OBJECT-GROUP, NOTIFICATION-GROUP
        FROM SNMPv2-CONF

    SnmpAdminString
        FROM SNMP-FRAMEWORK-MIB;

ieee8023powerEthernetMIB MODULE-IDENTITY

    LAST-UPDATED "201102020000Z" -- February 2, 2011
    ORGANIZATION
        "IEEE 802.3 working group"
    CONTACT-INFO
        "WG-URL: http://www.ieee802.org/3/index.html
        WG-EMail: STDS-802-3-MIB@LISTSERV.IEEE.ORG

        Contact: Howard Frazier
        Postal: 3151 Zanker Road
              San Jose, CA 95134
              USA
        Tel:    +1.408.922.8164
        E-mail: hfrazier@broadcom.com"

    DESCRIPTION
        "The MIB module for managing Power Source Equipment
        (PSE) working according to the IEEE 802.af Powered
        Ethernet (DTE Power via MDI) standard."

    REVISION    "201102020000Z" -- February 2, 2011
    DESCRIPTION
        "Initial version, based on an earlier version published as RFC 3621."

    ::= { org ieee(111) standards-association-numbers-series-standards(2)
        lan-man-stds(802) ieee802dot3(3) ieee802dot3dot1mibs(1) 8 }

pethNotifications OBJECT IDENTIFIER ::= { ieee8023powerEthernetMIB 0 }
pethObjects        OBJECT IDENTIFIER ::= { ieee8023powerEthernetMIB 1 }
pethConformance    OBJECT IDENTIFIER ::= { ieee8023powerEthernetMIB 2 }

-- PSE Objects

pethPsePortTable OBJECT-TYPE
    SYNTAX          SEQUENCE OF PethPsePortEntry
    MAX-ACCESS      not-accessible
    STATUS          current
    DESCRIPTION
        "A table of objects that display and control the power
        characteristics of power Ethernet ports on a Power Source
        Entity (PSE) device. This group will be implemented in
        managed power Ethernet switches and mid-span devices.
        Values of all read-write objects in this table are
        persistent at restart/reboot."

```

```

 ::= { pethObjects 1 }

pethPsePortEntry OBJECT-TYPE
    SYNTAX      PethPsePortEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "A set of objects that display and control the power
         characteristics of a power Ethernet PSE port."
    INDEX       { pethPsePortGroupIndex , pethPsePortIndex }
    ::= { pethPsePortTable 1 }

PethPsePortEntry ::= SEQUENCE {
    pethPsePortGroupIndex
        Integer32,
    pethPsePortIndex
        Integer32,
    pethPsePortAdminEnable
        TruthValue,
    pethPsePortPowerPairsControlAbility
        TruthValue,
    pethPsePortPowerPairs
        INTEGER,
    pethPsePortDetectionStatus
        INTEGER,
    pethPsePortPowerPriority
        INTEGER,

    pethPsePortMPSAbsentCounter
        Counter32,
    pethPsePortType
        SnmpAdminString,
    pethPsePortPowerClassifications
        INTEGER,
    pethPsePortInvalidSignatureCounter
        Counter32,
    pethPsePortPowerDeniedCounter
        Counter32,
    pethPsePortOverLoadCounter
        Counter32,
    pethPsePortShortCounter
        Counter32
}

pethPsePortGroupIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This variable uniquely identifies the group
         containing the port to which a power Ethernet PSE is
         connected. Group means box in the stack, module in a
         rack and the value 1 shall be used for non-modular devices.
         Furthermore, the same value shall be used in this variable,
         pethMainPseGroupIndex, and pethNotificationControlGroupIndex
         to refer to a given box in a stack or module in the rack."
    ::= { pethPsePortEntry 1 }

pethPsePortIndex OBJECT-TYPE

```

```

SYNTAX      Integer32 (1..2147483647)
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This variable uniquely identifies the power Ethernet PSE
    port within group pethPsePortGroupIndex to which the
    power Ethernet PSE entry is connected."
 ::= { pethPsePortEntry 2 }

pethPsePortAdminEnable OBJECT-TYPE
SYNTAX TruthValue
MAX-ACCESS read-write
STATUS current
DESCRIPTION
    "true (1) An interface which can provide the PSE functions.
    false(2) The interface will act as it would if it had no PSE
    function."

REFERENCE
    "IEEE Std 802.3, 30.9.1.1.2 aPSEAdminState"
 ::= { pethPsePortEntry 3 }

pethPsePortPowerPairsControlAbility OBJECT-TYPE
SYNTAX TruthValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "Describes the capability of controlling the power pairs
    functionality to switch pins for sourcing power.
    The value true indicate that the device has the capability
    to control the power pairs. When false the PSE Pinout
    Alternative used cannot be controlled through the
    PethPsePortAdminEnable attribute."

REFERENCE
    "IEEE Std 802.3, 30.9.1.1.3
    aPSEPowerPairsControlAbility"
 ::= { pethPsePortEntry 4 }

pethPsePortPowerPairs OBJECT-TYPE
SYNTAX INTEGER {
    signal(1),
    spare(2)
}
MAX-ACCESS read-write
STATUS current
DESCRIPTION
    "Describes or controls the pairs in use. If the value of
    pethPsePortPowerPairsControl is true, this object is
    writable.
    A value of signal(1) means that the signal pairs
    only are in use.
    A value of spare(2) means that the spare pairs
    only are in use."

REFERENCE
    "IEEE Std 802.3, 30.9.1.1.4 aPSEPowerPairs"
 ::= { pethPsePortEntry 5 }

pethPsePortDetectionStatus OBJECT-TYPE
SYNTAX INTEGER {

```

```

        disabled(1),
        searching(2),
        deliveringPower(3),
        fault(4),
        test(5),
        otherFault(6)
    }
}

MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "Describes the operational status of the port PD detection.
    A value of disabled(1)- indicates that the PSE State diagram
    is in the state DISABLED.
    A value of deliveringPower(3) - indicates that the PSE State
    diagram is in the state POWER_ON for a duration greater than
    tlim max (see IEEE Std 802.3af Table 33-5 tlim).
    A value of fault(4) - indicates that the PSE State diagram is
    in the state TEST_ERROR.
    A value of test(5) - indicates that the PSE State diagram is
    in the state TEST_MODE.
    A value of otherFault(6) - indicates that the PSE State
    diagram is in the state IDLE due to the variable
    error_conditions.
    A value of searching(2)- indicates the PSE State diagram is
    in a state other than those listed above."
REFERENCE
    "IEEE Std 802.3, 30.9.1.1.5
    aPSEPowerDetectionStatus"
 ::= { pethPsePortEntry 6 }

    pethPsePortPowerPriority OBJECT-TYPE
SYNTAX INTEGER {
    critical(1),
    high(2),
    low(3)
}
MAX-ACCESS read-write
STATUS current
DESCRIPTION
    "This object controls the priority of the port from the point
    of view of a power management algorithm. The priority that
    is set by this variable could be used by a control mechanism
    that prevents over current situations by disconnecting first
    ports with lower power priority. Ports that connect devices
    critical to the operation of the network - like the E911
    telephones ports - should be set to higher priority."
 ::= { pethPsePortEntry 7 }

pethPsePortMPSAbsentCounter OBJECT-TYPE
SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "This counter is incremented when the PSE state diagram
    transitions directly from the state POWER_ON to the

    state IDLE due to tmpdo_timer_done being asserted."
REFERENCE

```

```

    "IEEE Std 802.3, 30.9.1.1.11
    aPSEMPSAbsentCounter"
 ::= { pethPsePortEntry 8 }

```

pethPsePortType OBJECT-TYPE

SYNTAX SnmpAdminString

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"A manager will set the value of this variable to indicate the type of powered device that is connected to the port. The default value supplied by the agent if no value has ever been set should be a zero-length octet string."

```
 ::= { pethPsePortEntry 9 }

```

pethPsePortPowerClassifications OBJECT-TYPE

```

SYNTAX INTEGER {
    class0(1),
    class1(2),
    class2(3),
    class3(4),
    class4(5)
}

```

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Classification is a way to tag different terminals on the Power over LAN network according to their power consumption. Devices such as IP telephones, WLAN access points and others, will be classified according to their power requirements.

The meaning of the classification labels is defined in the IEEE specification.

This variable is valid only while a PD is being powered, that is, while the attribute pethPsePortDetectionStatus is reporting the enumeration deliveringPower."

REFERENCE

```

    "IEEE Std 802.3, 30.9.1.1.6
    aPSEPowerClassification"
 ::= { pethPsePortEntry 10 }

```

pethPsePortInvalidSignatureCounter OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This counter is incremented when the PSE state diagram enters the state SIGNATURE\_INVALID."

REFERENCE

```

    "IEEE Std 802.3, 30.9.1.1.7
    aPSEInvalidSignatureCounter"
 ::= { pethPsePortEntry 11 }

```

pethPsePortPowerDeniedCounter OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

```

DESCRIPTION
    "This counter is incremented when the PSE state diagram
    enters the state POWER_DENIED."
REFERENCE
    "IEEE Std 802.3, 30.9.1.1.8
    aPSEPowerDeniedCounter"
    ::= { pethPsePortEntry 12 }

pethPsePortOverLoadCounter OBJECT-TYPE
SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "This counter is incremented when the PSE state diagram
    enters the state ERROR_DELAY_OVER."
REFERENCE
    "IEEE Std 802.3, 30.9.1.1.9
    aPSEOverLoadCounter"
    ::= { pethPsePortEntry 13 }

pethPsePortShortCounter OBJECT-TYPE
SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "This counter is incremented when the PSE state diagram
    enters the state ERROR_DELAY_SHORT."
REFERENCE
    "IEEE Std 802.3, 30.9.1.1.10
    aPSEShortCounter"
    ::= { pethPsePortEntry 14 }

-- Main PSE Objects

pethMainPseObjects      OBJECT IDENTIFIER ::= { pethObjects 3 }

pethMainPseTable OBJECT-TYPE
SYNTAX      SEQUENCE OF PethMainPseEntry
MAX-ACCESS not-accessible
STATUS      current
DESCRIPTION
    "A table of objects that display and control attributes
    of the main power source in a PSE device. Ethernet
    switches are one example of boxes that would support
    these objects.
    Values of all read-write objects in this table are
    persistent at restart/reboot."
    ::= { pethMainPseObjects 1 }

pethMainPseEntry OBJECT-TYPE
SYNTAX      PethMainPseEntry
MAX-ACCESS not-accessible
STATUS      current
DESCRIPTION
    "A set of objects that display and control the Main
    power of a PSE. "
INDEX      { pethMainPseGroupIndex }
    ::= { pethMainPseTable 1 }

```

```

PethMainPseEntry ::= SEQUENCE {
    pethMainPseGroupIndex
        Integer32,
    pethMainPsePower
        Gauge32 ,
    pethMainPseOperStatus
        INTEGER,
    pethMainPseConsumptionPower
        Gauge32,
    pethMainPseUsageThreshold
        Integer32
}

pethMainPseGroupIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This variable uniquely identifies the group to which
        power Ethernet PSE is connected. Group means (box in
        the stack, module in a rack) and the value 1 shall be
        used for non-modular devices. Furthermore, the same
        value shall be used in this variable, pethPsePortGroupIndex,
        and pethNotificationControlGroupIndex to refer to a
        given box in a stack or module in a rack."
    ::= { pethMainPseEntry 1 }

pethMainPsePower OBJECT-TYPE
    SYNTAX      Gauge32 (1..65535)
    UNITS       "Watts"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The nominal power of the PSE expressed in Watts."
    ::= { pethMainPseEntry 2 }

pethMainPseOperStatus OBJECT-TYPE
    SYNTAX INTEGER {
        on(1),
        off(2),
        faulty(3)
    }
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The operational status of the main PSE."
    ::= { pethMainPseEntry 3 }

pethMainPseConsumptionPower OBJECT-TYPE
    SYNTAX      Gauge32
    UNITS       "Watts"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "Measured usage power expressed in Watts."
    ::= { pethMainPseEntry 4 }

pethMainPseUsageThreshold OBJECT-TYPE
    SYNTAX      Integer32 (1..99)
    UNITS       "%"

```

```

MAX-ACCESS read-write
STATUS current
DESCRIPTION
    "The usage threshold expressed in percents for
    comparing the measured power and initiating
    an alarm if the threshold is exceeded."
 ::= { pethMainPseEntry 5 }

-- Notification Control Objects

pethNotificationControl OBJECT IDENTIFIER ::= { pethObjects 4 }

pethNotificationControlTable OBJECT-TYPE
SYNTAX SEQUENCE OF PethNotificationControlEntry
MAX-ACCESS not-accessible

STATUS current
DESCRIPTION
    "A table of objects that display and control the
    Notification on a PSE device.
    Values of all read-write objects in this table are
    persistent at restart/reboot."
 ::= { pethNotificationControl 1 }

pethNotificationControlEntry OBJECT-TYPE
SYNTAX PethNotificationControlEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "A set of objects that control the Notification events."
INDEX { pethNotificationControlGroupIndex }
 ::= { pethNotificationControlTable 1 }

PethNotificationControlEntry ::= SEQUENCE {
    pethNotificationControlGroupIndex
        Integer32,
    pethNotificationControlEnable
        TruthValue
}

pethNotificationControlGroupIndex OBJECT-TYPE
SYNTAX Integer32 (1..2147483647)
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "This variable uniquely identifies the group. Group
    means box in the stack, module in a rack and the value
    1 shall be used for non-modular devices. Furthermore,
    the same value shall be used in this variable,
    pethPsePortGroupIndex, and
    pethMainPseGroupIndex to refer to a given box in a
    stack or module in a rack. "
 ::= { pethNotificationControlEntry 1 }

pethNotificationControlEnable OBJECT-TYPE
SYNTAX TruthValue
MAX-ACCESS read-write
STATUS current
DESCRIPTION
    "This object controls, on a per-group basis, whether

```

```

        or not notifications from the agent are enabled. The
        value true(1) means that notifications are enabled; the
        value false(2) means that they are not."
 ::= { pethNotificationControlEntry 2 }
--
-- Notifications Section
--
--

pethPsePortOnOffNotification NOTIFICATION-TYPE
OBJECTS      { pethPsePortDetectionStatus }
STATUS       current
DESCRIPTION
    " This Notification indicates if Pse Port is delivering or
      not power to the PD. This Notification should be sent on
      every status change except in the searching mode.
      At least 500 msec shall elapse between notifications
      being emitted by the same object instance."
 ::= { pethNotifications 1 }

pethMainPowerUsageOnNotification NOTIFICATION-TYPE
OBJECTS      { pethMainPseConsumptionPower }
STATUS       current
DESCRIPTION
    " This Notification indicate PSE Threshold usage
      indication is on, the usage power is above the
      threshold. At least 500 msec shall elapse between
      notifications being emitted by the same object
      instance."
 ::= { pethNotifications 2 }

pethMainPowerUsageOffNotification NOTIFICATION-TYPE
OBJECTS      { pethMainPseConsumptionPower }
STATUS       current
DESCRIPTION
    " This Notification indicates PSE Threshold usage indication
      off, the usage power is below the threshold.
      At least 500 msec shall elapse between notifications being
      emitted by the same object instance."
 ::= { pethNotifications 3 }

--
-- Conformance statements
--
pethCompliances OBJECT IDENTIFIER ::= { pethConformance 1 }
pethGroups      OBJECT IDENTIFIER ::= { pethConformance 2 }

-- Compliance statements

pethCompliance MODULE-COMPLIANCE
STATUS current
DESCRIPTION
    "Describes the requirements for conformance to the
    Power Ethernet MIB."

MODULE -- this module
MANDATORY-GROUPS { pethPsePortGroup,
                   pethPsePortNotificationGroup,
                   pethNotificationControlGroup

```

```

    }
    GROUP    pethMainPseGroup
    DESCRIPTION
        "The pethMainPseGroup is mandatory for PSE systems
        that implement a main power supply."
    GROUP    pethMainPowerNotificationGroup
    DESCRIPTION
        "The pethMainPowerNotificationGroup is mandatory for
        PSE systems that implement a main power supply."
    ::= { pethCompliances 1 }

pethPsePortGroup OBJECT-GROUP
    OBJECTS {
        pethPsePortAdminEnable,
        pethPsePortPowerPairsControlAbility,
        pethPsePortPowerPairs,
        pethPsePortDetectionStatus,
        pethPsePortPowerPriority,
        pethPsePortMPSAbsentCounter,
        pethPsePortInvalidSignatureCounter,
        pethPsePortPowerDeniedCounter,
        pethPsePortOverLoadCounter,
        pethPsePortShortCounter,
        pethPsePortType,
        pethPsePortPowerClassifications
    }
    STATUS    current
    DESCRIPTION
        "PSE Port objects."
    ::= { pethGroups 1 }

pethMainPseGroup OBJECT-GROUP
    OBJECTS {
        pethMainPsePower,
        pethMainPseOperStatus,
        pethMainPseConsumptionPower,
        pethMainPseUsageThreshold
    }
    STATUS    current
    DESCRIPTION
        "Main PSE Objects. "
    ::= { pethGroups 2 }

pethNotificationControlGroup OBJECT-GROUP

    OBJECTS {
        pethNotificationControlEnable
    }
    STATUS    current
    DESCRIPTION
        "Notification Control Objects. "
    ::= { pethGroups 3 }

pethPsePortNotificationGroup NOTIFICATION-GROUP
    NOTIFICATIONS { pethPsePortOnOffNotification}
    STATUS    current
    DESCRIPTION "Pse Port Notifications."
    ::= { pethGroups 4 }

```

```
pethMainPowerNotificationGroup NOTIFICATION-GROUP
  NOTIFICATIONS { pethMainPowerUsageOnNotification,
                  pethMainPowerUsageOffNotification}
  STATUS          current
  DESCRIPTION     "Main PSE Notifications."
  ::= { pethGroups 5 }
```

END



## 9. Ethernet passive optical networks (EPON) MIB module

### 9.1 Overview

This clause defines a MIB module for use with SNMP to manage 1G-EPON interfaces for Ethernet Passive Optical Networks. The clause contains a list of management objects based on the attributes defined in the relevant parts of IEEE Std 802.3 Clause 30, referring to EPON.

#### 9.1.1 EPON architecture highlights

##### 9.1.1.1 Introduction

The EPON standard, now part of IEEE Std 802.3, defines the Physical Layer and Media Access Control sub-layer of EPON interfaces. EPON is a variant of Gigabit Ethernet used in optical access. The Passive Optical Network (PON) is comprised of sections of single-mode fiber connected with passive optical splitter/coupler devices, forming a passive optical tree, as shown in Figure 9–1. Individual branches of the PON are terminated with the Optical Line Terminal (OLT) in the Central Office and Optical Network Units (ONUs) near the subscribers. ONUs can be located either in some remote location (e.g., basement in a multi-dwelling unit) or directly at the subscriber premises. Various types of Customer Premises Equipment (CPE) can be connected to ONUs or even integrated with such devices. Figure 9–1 presents an example PON topology.

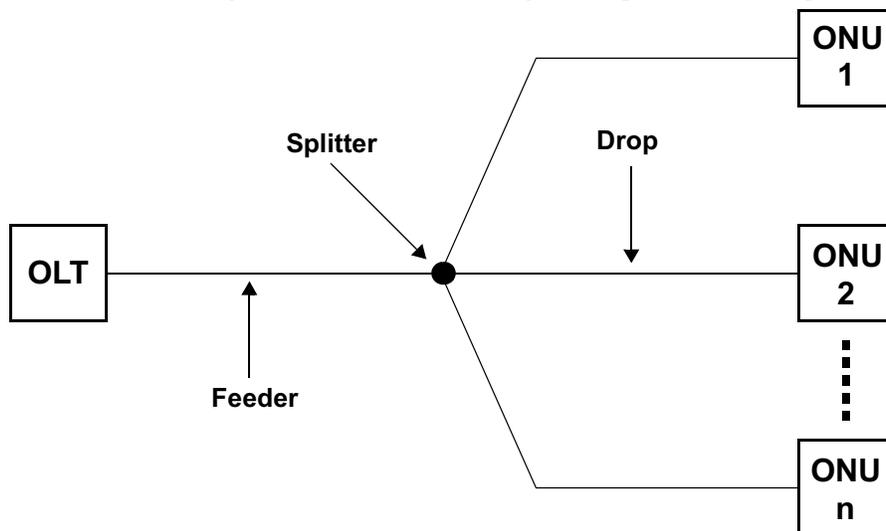


Figure 9–1—PON topology example

The IEEE layering architecture of an EPON interface is defined in the diagram of Figure 56–2 in IEEE Std 802.3. The following clauses in IEEE Std 802.3 define the corresponding layers of an EPON interface:


- Clause 30: Management
- Clause 60: PMD for EPON media (burst-mode PMD)
- Clause 64: MPCP (Multipoint Control Protocol), which defines the Multipoint architecture, and control protocol for the media access of EPON.
- Clause 65: Reconciliation Sublayer and Physical Coding Sublayer, which defines a number of extensions to standard Gigabit Ethernet PCS, i.e.,
  - a) Definition of Point-to-Point emulation function for EPON
  - b) Definition of the optional (frame-based) FEC for EPON
  - c) PMA for EPON

### 9.1.1.2 Principles of operation

The EPON interface specification extends the specification of Gigabit Ethernet as described in IEEE Std 802.3 Clause 35 and Clause 36. The Ethernet MAC operates at the data rate of 1 Gb/s and it is connected to media dependent interface through the GMII interface, as described in Clause 35. The EPON PCS layer extends the Gigabit Ethernet PCS as described in Clause 36. New, EPON-specific layers are added to Gigabit Ethernet layers in the following locations:

- MPCP is placed in the MAC control layer, providing EPON media access, station discovery, and registration protocol.
- Functionality of the reconciliation sublayer (RS) of Gigabit Ethernet was extended, creating logical links over shared passive optical medium, providing private transmission channels to each of the connected ONU.
- (Optional) FEC functionality located between the PCS and PMA layers was added, extending the Gigabit Ethernet PCS layer, enhancing reach and split performance of the EPON optical link.

Figure 9–2 presents the EPON layering model.

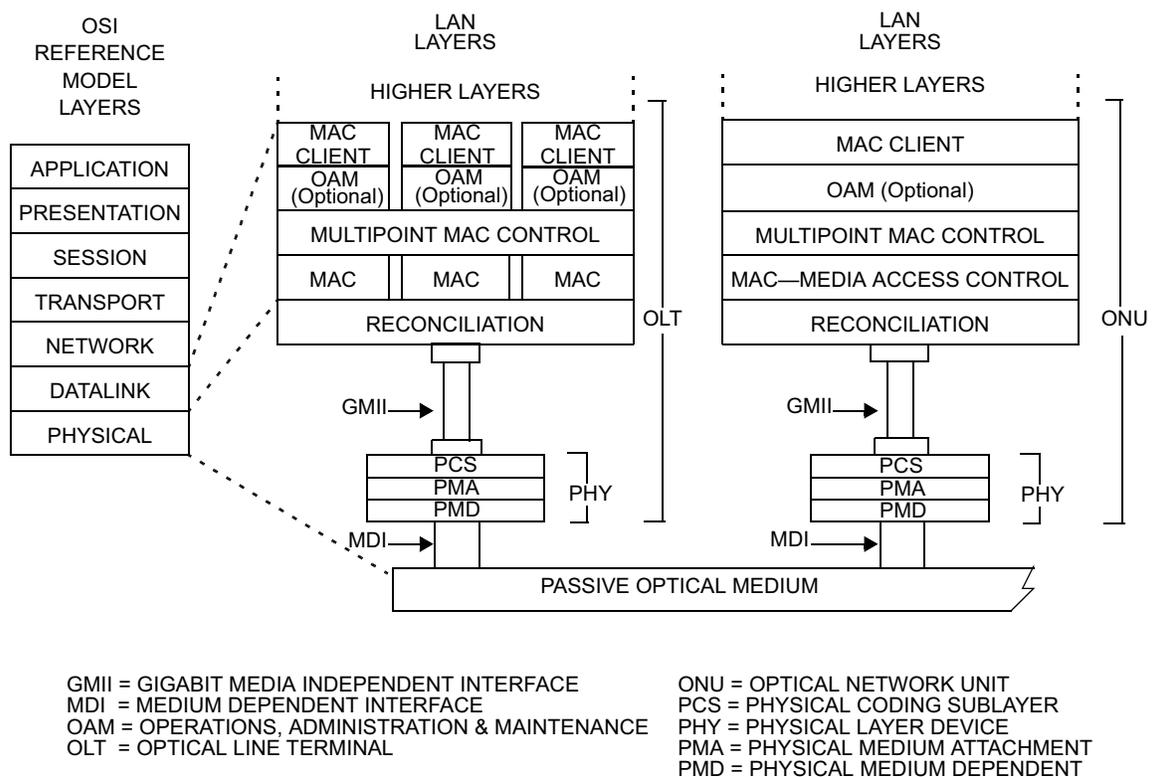

**Figure 9–2—Relationship of Multipoint MAC control and the OSI protocol stack**

### 9.1.1.3 Physical media

The physical link in EPON comprises single-mode fiber. The OLT and ONUs are connected through a passive optical network comprising sections of single-mode fiber interconnected with passive splitter/coupler devices.

The term *downstream* denotes transmission from the OLT to all connected ONUs, while the term *upstream* denotes transmission from the connected ONUs (one at the time) to the OLT. Upstream and downstream transmissions are wavelength division multiplexed (WDM) into a single strand of single-mode fiber, sharing the same physical link.

The downstream transmission channel is always available to the OLT, thus Time Division Multiplexing (TDM) is used. Transmissions from the OLT arrive at all of the connected ONUs and the individual ONUs filter data from the OLT's transmission based on the logical link identifiers (LLID) assigned to them during the registration and discovery process.

The upstream transmission channel is shared among a number of connected and registered ONUs using Time Division Multiple Access (TDMA). Access to upstream channel is controlled via the Multipoint Control Protocol (MPCP), where the OLT plays the role of the master and ONUs play the role of slave devices. An ONU upon registration remains silent until registered and once registered, it transmits data towards OLT only when granted a transmission opportunity (slot).

#### **9.1.1.4 PMD specifications**

The EPON PMD specifications are based on a wavelength plan similar to that used by ITU-T G.983.1. The OLT and ONU optical parameters were derived in part from earlier 1000 Mb/s Ethernet PMD specifications, with the addition of WDM capabilities, and burst mode operation for ONU transmitters and the OLT receiver.

The upstream burst mode operation capability corresponds directly to the TDMA operation in the upstream direction, where queued data is burst from individual ONUs at full data rate for the duration of the allocated transmission period. Once completed, the ONU goes silent and another ONU starts transmitting its data.

#### **9.1.1.5 Point-to-point emulation**

The downstream link is a broadcast medium, which means that all data transmitted by the OLT is received by all connected ONUs. In order to guarantee compliance of EPON with Ethernet architecture, the P2PE function was included in the RS, creating a series of logical links between the OLT and connected ONUs. An additional broadcast link is also provided for delivery of any broadcast content. In this way, EPON becomes a collection of logical P2P connections established between the OLT and the ONUs. Therefore, the OLT can be seen as an Ethernet device with N+1 logical ports (N P2P logical interfaces and 1 broadcast interface, where N designates the number of connected ONUs).


Logical links also provide a solution for privacy of data, which otherwise would be shared by all subscribers connected to a single OLT port. In this way, each subscriber is isolated and restricted to accessing data streams addressed only to that particular subscriber.

This concept is illustrated in Figure 9–3, which shows an example of an EPON with a single OLT and three connected ONUs.

The single copy broadcast channel (addressed with a special, reserved LLID, see IEEE Std 802.3 65.1.3.1) was added to take advantage of the broadcast transmission capability of the underlying physical medium. In this way, it is very simple and very bandwidth efficient to deliver broadcast content to all ONUs at the same time, avoiding the need to replicate data into a series of P2P links.

The ONUs filter all downstream data and drop all frames addressed to other devices. Only broadcast frames and frames with correct unicast logical link ID (LLID) are admitted and processed. The LLID replaces two octets of the Ethernet frame preamble, identifying a logical link established between the OLT and the given ONU during the discovery and registration process. The LLID indicates the destination port in the down-

stream and source port in the upstream. The logical links are used effectively to prevent EPON from violating the IEEE 802.1D bridging rules.

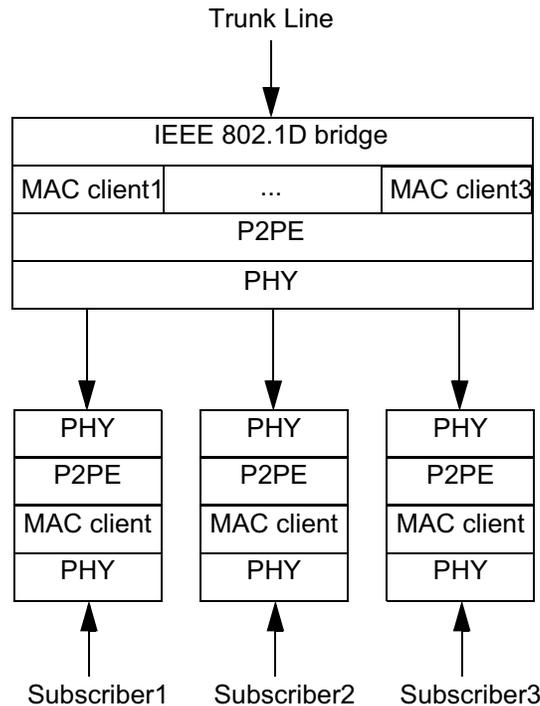

**Figure 9–3—Example of point-to-point emulation used between an OLT and three ONUs**

#### 9.1.1.6 Principles of the MPCP

The EPON standard comprises a mechanism for media access control, referred to as Multipoint Control Protocol (MPCP). An access network architecture is different from a typical LAN environment, primarily in terms of network provisioning. An access network is an administrated environment, with an operator providing services and subscribers consuming it depending on service provisioning contracts. The operator controls the network, manages traffic and medium access, and enforces the service level agreements (SLAs). For instance, the available bandwidth is controlled and subscribers may be billed for services. In this sense, the access network (and EPON specifically) requires a media access control protocol that provides mechanism for station discovery and registration as well as bandwidth provisioning capabilities.

In the MPCP, the OLT is considered to be the master, controlling a series of connected ONUs (slave devices). The OLT manages the network and controls access to network resources from individual slave devices. The MPCP is also used for provisioning upstream channel access to individual slave devices via a MPCPDU pair i.e., GATE and REPORT. The MPCP is part of the MAC control layer and MPCPDUs are considered MAC control messages, carrying a specific Ethertype of 0x8808. These messages are not forwarded outside of the EPON domain and are used to manage the EPON link only.

A concept of time exists in the MPCP in order to schedule the upstream transmission. A timestamp, which is transmitted in the MPCPDUs downstream by the OLT and received by the connected ONUs, is used to synchronize slave devices to master device clock. This guarantees that upstream transmissions from individual ONUs arrive at the OLT at the precisely anticipated time, which in turn guarantees that data from different ONUs will not overlap.


The MPCP plane is also used to measure the round-trip time (RTT) for each connected ONU. Each MPCPDU carries a generalized timestamp field, which is filled in by the transmitting station with the current value of its MPCP clock at the time when the given MPCPDU is transmitted. The RTT is measured first during the discovery and registration process and then updated regularly upon each exchange of MPCPDUs between the OLT and one of the ONUs. RTT is used by the OLT bandwidth scheduler to schedule upstream transmission slots for individual ONUs in a non-overlapping manner. The IEEE 802.3 EPON standard provides support for the network diameter (distance between the OLT and the farthest ONU) of nominally up to 20 km, which corresponds to the RTT of approximately 200  $\mu$ s. However, nothing in the standard precludes support for larger network diameters.

The TDMA control is performed using a pair of MPDPUs, namely GATE generated by the OLT to indicate a future transmission opportunity to an ONU and REPORT generated by the ONU with information on the current queue status (bandwidth demand). Internal structure and possible encoding of GATE and REPORT MPCPDUs are defined in Clause 64 of IEEE Std 802.3.

A scheduling algorithm at the OLT, which is not defined in IEEE Std 802.3, is responsible for dividing the bandwidth and controlling the transmission delay of each ONU according to its SLA. The MPCP defines a closed loop operation in order for this algorithm to be efficient. The MPCP allows the ONUs to report on the amount of bandwidth they require for transmission using a special REPORT message. This allows allocating bandwidth to an ONU only when requested, relying on the statistical burst property of the traffic, and allowing different peak bandwidths for different ONUs at different times; hence, allowing oversubscription of the bandwidth. The REPORT message reports the amount of data waiting in the ONU queues.

In addition, the MPCP defines a protocol of auto-discovery and registration of ONUs.

The MPCP registration process is presented in Figure 9–4, while details are described in Clause 64 of IEEE Std 802.3.

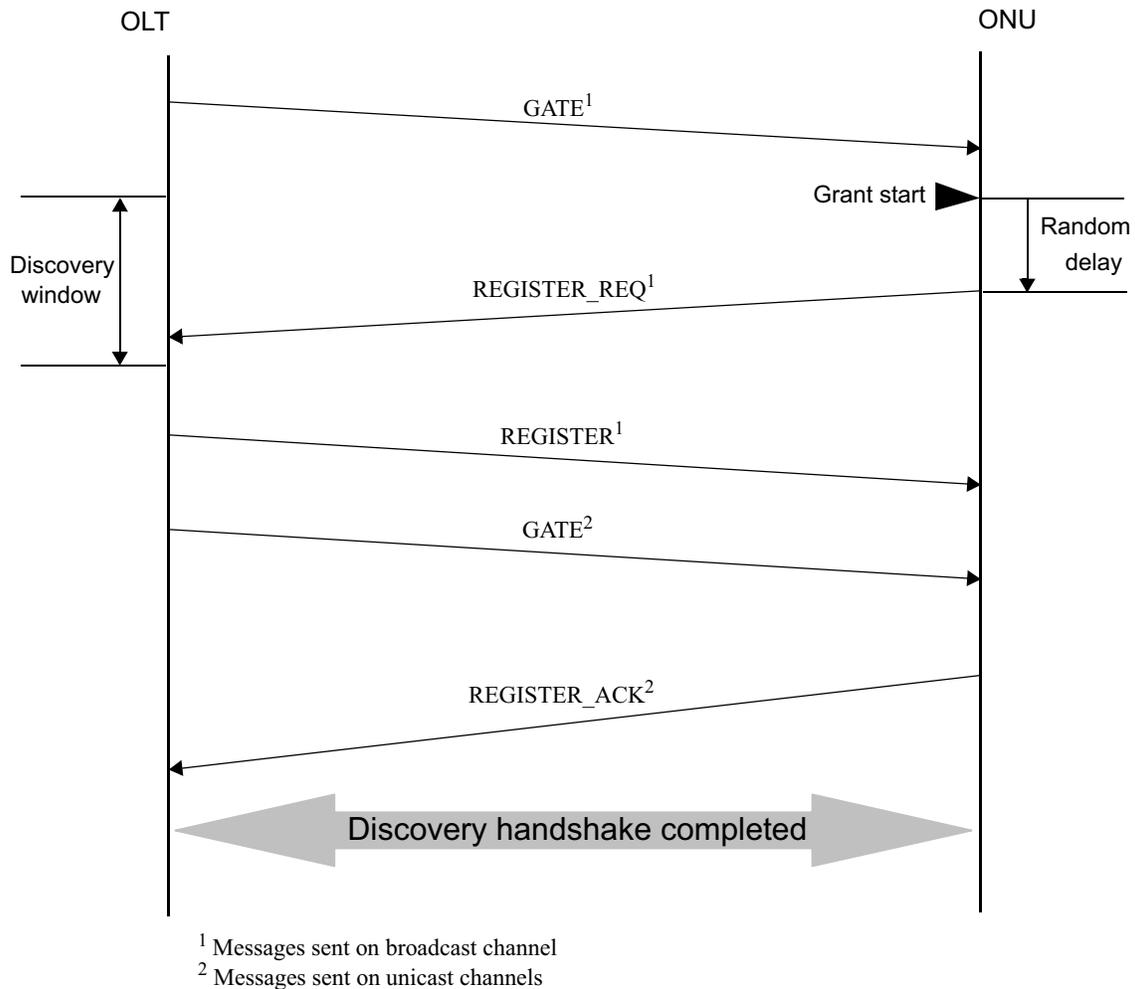

**Figure 9-4—Discovery handshake message exchange**

A new ONU requests to register during a special upstream window (called Discovery Window), sending the REGISTER\_REQ MPCPDU. More than one ONU may attempt registration during that window, which means that their REGISTER\_REQ MPCPDUs can potentially collide at the OLT receiver, since the ONU-specific RTT is not yet known and transmissions from individual ONUs cannot be scheduled in a non-overlapping manner. A random backoff mechanism was therefore developed and is used to increase the registration success probability.

When the OLT receives a REGISTER\_REQ MPCPDU from an ONU, decision on registration is taken and an LLID is assigned to that ONU. Next, the OLT sends a REGISTER MPCPDU to that ONU, informing the given slave device whether it is admitted to network or not. The registration process is completed with the ONU sending REGISTER\_ACK MPCPDU to the OLT, confirming assigned parameters and registration in the network. From that point onward, the OLT can schedule transmissions from that ONU using its LLID, using the measured RTT to guarantee that its transmissions do not collide with other ONUs.

Additional higher layer protocols may be employed to authenticate the ONU and allow it to participate in the network; however, their specification is outside the scope of IEEE Std 802.3.

### 9.1.1.7 Forward error correction (FEC)

The optional FEC mechanism is defined to enhance the EPON link budget. All the passive components of the fiber plant attenuate the optical signal, thus the target distance (network diameter) and the number of supported splits is limited by the available link budget. The optional FEC mechanism increases the available link budget by improving the link BER from  $10^{-4}$  to  $10^{-12}$  (the target BER at the MAC), effectively increasing the target network diameter and/or split ratio. The target use of the increased power budget remains at the sole discretion of the network architects and is out of the scope of IEEE Std 802.3.

The optional FEC used in EPON is frame-based, meaning that parity information is added at the end of each Ethernet packet. Extra space between individual Ethernet packets is guaranteed by the MAC rate adaptation function, while extra idle symbols were replaced within the FEC function.

The start and end of packet codewords also define the FEC boundaries, and they are outside the FEC protection. They are replaced by a series of symbols to reduce their vulnerability to link errors.

Figure 9–5 presents the structure of an FEC-protected EPON frame.

The optional FEC function is added to the extended Gigabit Ethernet PCS per 65.2 in IEEE Std 802.3. The added, optional FEC function introduces a fixed delay in receive path and transmit path.



**Figure 9–5—FEC-protected frame**

### 9.1.2 Management architecture


All of the EPON layers are accompanied by a management interface that is controlled through mechanisms defined in Clause 30 of IEEE Std 802.3. Since IEEE Std 802.3 specifications may be used for different applications (and hence are extensible), and some of the clauses may be used separately, the management clause allocates a separate package for each independent layer. The structure of the MIB modules follows this separation.

Figure 9–6 presents the relation of the MIB module groups to the individual IEEE Std 802.3 layers.

The association is straightforward for the ONU interface. There is one logical and one physical interface, and a single copy of each layer can be remotely queried by the OLT.

The OLT has a single physical interface and N logical interfaces, one for each logical link connected to an ONU. There is also one logical interface for the single copy broadcast link. Per layering diagram in Figure 9–6, the MAC sublayer is virtually replicated. Therefore, in this clause it was elected that management of logical interfaces is performed in the manner identical to management of any physical interfaces—an interface index is allocated for each one of the logical links, and an additional interface index is allocated for the OLT.

For each physical interface, there would be an entry (ifIndex) in the tables of the interface MIB module defined in IETF RFC 2863, the MAU MIB module defined in Clause 13, and the Ethernet-like MIB module defined in Clause 10. Additionally, there would be entries (ifIndexes) for the virtual interfaces of the OLT interface. The justification for the additional allocation of indexes is that the virtual interfaces are quite well

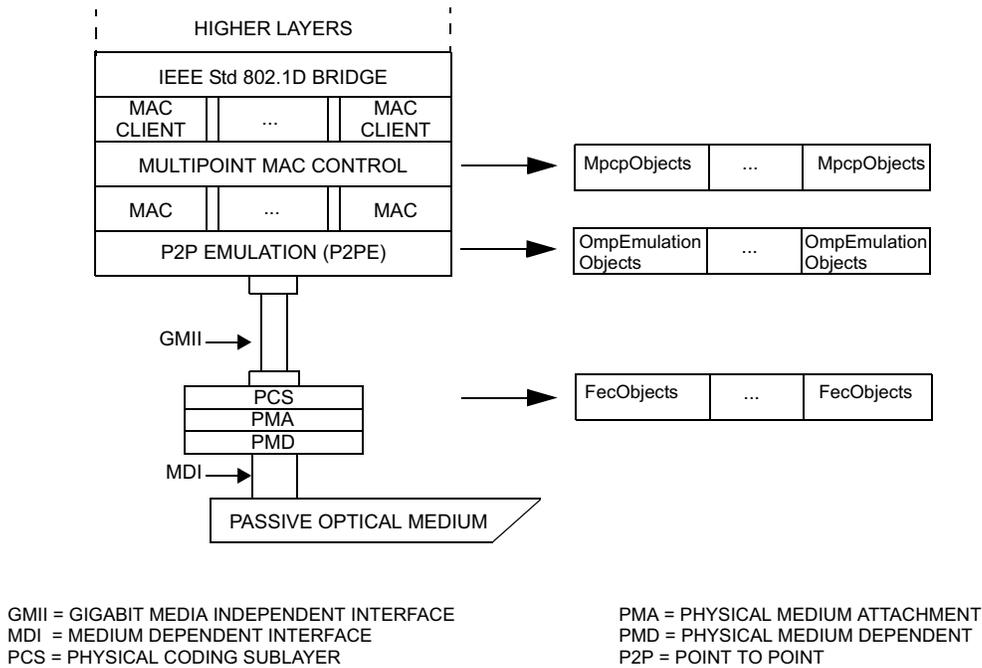

**Figure 9–6—Relationship of the MIB groups to the EPON sublayers**

distinguished, as they connect different physical ONUs from the OLT side. For instance, there is a meaning for separate bad frames counter or bad octets counter for each virtual link, as the ONUs can be differently distanced. This is quite similar to a case of separate physical interfaces.

The same partition concept exists for the MIB module of this clause. Each row in the tables are indexed according to the `ifIndex`; specifically, there is a row for each virtual link. There are some control objects that are shared and are the same for the virtual interfaces (and they should have the same value for each `ifIndex`), but most of the objects have different values for `N+1` logical interfaces at the OLT. This is done for each MIB group. It is different from the EPON layering diagram, which presents the P2MP layer as a single layer, while duplicating the MAC and MAC client layers (please see Figure 9–6). However, from a management perspective, it is more convenient to partition the management of the layers for the virtual links, as the atomic managed entity is the virtual link. It is also convenient to use the interface index of the virtual link for that purpose, as it is already used to index the rows of the virtual links at the Interface, MAU, and Ethernet-like interface MIBs.

## 9.2 MIB structure

This subclause defines the DOT3 EPON MIB module. The DOT3 EPON MIB module defines the objects used for management of the IEEE Std 802.3 EPON interfaces. These MIB objects are included in the following four groups.

- a) MPCP MIB objects—MIB objects related to IEEE Std 802.3, Clause 64, Multipoint Control Protocol attributes. The following tables are presented in this group:
  - 1) The `dot3MpcpControlTable` defines the objects used for the configuration and status indication, which are per logical link, of MPCP compliant interfaces.

- 2) The dot3MpcpStatTable defines the statistics objects that are per logical link, of MPCP compliant interfaces.
- 3) The operational mode of an OLT/ONU for the tables is defined by the dot3MpcpMode object in the dot3MpcpControlTable.
- b) The OMPEmulation MIB objects—MIB objects related to IEEE Std 802.3, Clause 65, point-to-point emulation attributes. The following tables are presented in this group:
  - 1) The dot3OmpEmulationTable defines the objects used for the configuration and status indication, which are per logical links, of OMPEmulation compliant interfaces.
  - 2) The dot3OmpEmulationStatTable defines the statistics objects that are per logical link, of OMPEmulation compliant interfaces.
  - 3) The operational mode of an OLT/ONU for the tables is defined by the dot3OmpEmulationType object in the dot3OmpEmulationTable.
- c) The FEC MIB objects—MIB objects related to IEEE Std 802.3, Clause 60 and Clause 65, EPON FEC attributes. The following table is presented in this group:
  - 1) The dot3EponFecTable defines the objects used for the configuration and status indication, which are per logical link, of FEC EPON compliant interfaces.
- d) The EPON extended package MIB objects—MIB objects used for configuration and status indication with extended capabilities of the EPON interfaces. The following tables are presented in this group:
  - 1) The dot3ExtPkgControlTable defines the objects, which are per logical link, used for the configuration and status indication of EPON compliant interfaces.
  - 2) The dot3ExtPkgQueueTable defines the objects, which are per logical link, and per queue, used for the configuration and status indication of the ONU queues reported in the MPCP REPORT message, of EPON compliant interfaces.
  - 3) The dot3ExtPkgQueueSetsTable defines the objects, which are per logical link, per queue, and per queue\_set, used for the configuration and status indication of the ONU queue\_sets reported in the MPCP REPORT message, of EPON compliant interfaces.
  - 4) The dot3ExtPkgOptIfTable defines the objects, which are per logical link, used for the control and status indication of the optical interface of EPON compliant interfaces.

The interface MIB module defined in IETF RFC 2863 defines the interface index (ifIndex). Interface Index, as specified in IETF RFC 2863, is used in this MIB module as an index to the EPON MIB tables. The ifIndex is used to denote the physical interface and the virtual link interfaces at the OLT. The OLT interface and the virtual link interfaces are stacked using the ifStack table defined in IETF RFC 2863, and the ifInvStack defined in IETF RFC 2864. The OLT interface is the lower layer of all other interfaces associated with the virtual links.

As described in 9.1.2, each row in the tables is indexed according to the ifIndex; specifically, there is a row for each virtual link. There are a few control objects that are shared and have the same value for the virtual interfaces (and they should have the same value for each ifIndex), but most of the objects have different values for N+1 logical interfaces at the OLT. This is done for each MIB group. It is a bit different from the EPON layering diagram, which presents the P2MP layer as a single layer while duplicating the MAC and MAC client layers. However, from a management perspective, it is more convenient to partition the management of the layers for the virtual links, as the atomic managed entity is the virtual link. It is also convenient to use the interface index of the virtual link for that purpose, as it is already used to index the rows of the virtual links at the Interface, MAU, and Ethernet-like interface MIB modules.

The creation of the rows of the ONU interface is done at initialization. Table 9–1 presents the MPCP control table of ONU1 after initialization. A single row exists in the table.

Table 9–2 presents the MPCP control table of ONU1 in working mode. A single row exists in the table.

**Table 9–1—MPCP control table of ONU1 after initialization**

MPCP control MIB object	Value
ifIndex	100
dot3MpcpOperStatus	true
dot3MpcpAdminState	true
dot3MpcpMode	onu
dot3MpcpSyncTime	0
dot3MpcpLinkID	0
dot3MpcpRemoteMACAddress	00:00:00:00:00:00
dot3MpcpRegistrationState	unregistered
dot3MpcpTransmitElapsed	0
dot3MpcpReceiveElapsed	0
dot3MpcpRoundTripTime	0

**Table 9–2—MPCP control table of ONU1 in working mode**

MPCP control MIB object	Value
ifIndex	100
dot3MpcpOperStatus	true
dot3MpcpAdminState	true
dot3MpcpMode	onu
dot3MpcpSyncTime	25
dot3MpcpLinkID	1
dot3MpcpRemoteMACAddress	OLT_MAC_Address <sup>a</sup>
dot3MpcpRegistrationState	registered
dot3MpcpTransmitElapsed	10
dot3MpcpReceiveElapsed	10
dot3MpcpRoundTripTime	100

<sup>a</sup>OLT\_MAC\_Address is the MAC address of the OLT EPON interface.

The creation of the rows of the OLT interface and the broadcast virtual interface is done at initialization.

The creation of rows of the virtual interfaces at the OLT is done when the link is established (ONU registers) and the deletion is done when the link is deleted (ONU deregisters).

Table 9–3 presents the MPCP control table of the OLT after initialization, before the ONUs register. A single row exists in this table associated with the virtual broadcast link.

**Table 9–3—MPCP control table of the OLT after initialization**

MPCP control MIB object	Value
ifIndex	165535
dot3MpcpOperStatus	true
dot3MpcpAdminState	true
dot3MpcpMode	olt
dot3MpcpSyncTime	25
dot3MpcpLinkID	65535
dot3MpcpRemoteMACAddress	BRCT_MAC_Address <sup>a</sup>
dot3MpcpRegistrationState	registered
dot3MpcpTransmitElapsed	10
dot3MpcpReceiveElapsed	100000
dot3MpcpRoundTripTime	0

<sup>a</sup>BRCT\_MAC\_Address is the MAC address of the broadcast EPON interface, which is the OLT MAC address.

Table 9–4 presents the MPCP control table of the OLT in working mode. Three rows exist in the table associated with the virtual links.

**Table 9–4—MPCP control table of the OLT in working mode**

MPCP control MIB object	Value	Value	Value
ifIndex	100001	100002	165535
dot3MpcpOperStatus	true	true	true
dot3MpcpAdminState	true	true	true
dot3MpcpMode	olt	olt	olt
dot3MpcpSyncTime	25	25	25

**Table 9–4—MPCP control table of the OLT in working mode (continued)**

MPCP control MIB object	Value	Value	Value
dot3MpcpLinkID	1	2	65535
dot3MpcpRemote MACAddress	ONU1_MAC_Address <sup>a</sup>	ONU2_MAC_Address <sup>b</sup>	BRCT_MAC_Address <sup>c</sup>
dot3MpcpRegistrationState	registered	registered	registered
dot3MpcpTransmitElapsed	10	10	10
dot3MpcpReceiveElapsed	10	10	10
dot3MpcpRoundTripTime	100	60	0

<sup>a</sup>ONU1\_MAC\_Address is the MAC address of ONU1 EPON interface.

<sup>b</sup>ONU2\_MAC\_Address is the MAC address of ONU2 EPON interface.

<sup>c</sup>BRCT\_MAC\_Address is the MAC address of the broadcast EPON interface, which is the OLT MAC address.

### 9.3 Relationship to other MIB modules

#### 9.3.1 Relation to the Interfaces Group MIB and Ethernet-like interface MIB

This MIB module extends the objects of the Interfaces Group MIB and the Ethernet-like interface MIB for the EPON type interface. Therefore, if this module is implemented, the Interfaces Group MIB module defined in IETF RFC 2863 and the Ethernet-like interface MIB module defined in Clause 10 shall also be implemented.

Thus, each managed EPON interface would have a corresponding entry in the mandatory tables of the Ethernet-like MIB module found in Clause 10, and likewise in the tables of the Interfaces Group MIB module found in IETF RFC 2863. Also, each managed virtual EPON interface would have a corresponding entry in the mandatory tables of the Ethernet-like MIB module found in Clause 10, and likewise in the tables of the Interfaces Group MIB module found in IETF RFC 2863 with a dedicated ifIndex for this interface.

In this clause, there is no replication of the objects from these MIBs. Therefore, for instance, the clause is defining dot3MpcpRemoteMACAddress only while assuming that the local MAC address object is already defined in Clause 10.

This clause defines the specific EPON objects of an ONU interface and an OLT interface. Information in the tables is per LLID. The rows in the EPON MIB tables referring to the LLIDs are denoted with the corresponding ifIndexes of the virtual link interfaces.

Note that all virtual interfaces have the same physical MAC address at the OLT, since the physical OLT interface used by all virtual interfaces is the same. The value of this physical MAC interface is specified in 64.1.2 of IEEE Std 802.3. The corresponding object of the Ethernet-like interface MIB is replicated for all the virtual interfaces.

For example, the values of the Interfaces Group MIB objects are presented in the following tables, for an OLT with three registered ONUs

Table 9–5 presents the objects of the Interfaces Group MIB of an ONU in working mode.

**Table 9–5—Interfaces Group MIB of an ONU in working mode**

<b>Interfaces Group MIB object</b>	<b>Value</b>
ifIndex	1
ifDescr	“interface description”
ifType	ethernetCsmacd (6) 1000base-Px
ifMtu	MTU size (1522)
ifSpeed	1000000000
ifPhysAddress	ONU_MAC_Address <sup>a</sup>
ifAdminStatus	up
ifOperStatus	Up
ifLastChange	ONUup_time
ifInOctets	ONU_octets_number
ifInUcastPkts	ONU_unicast_frame_number
ifInNUcastPkts	ONU_non_unicast_frame_number
ifInDiscards	ONU_discard_frame_number
ifInErrors	ONU_error_frame_number
ifInUnknownProtos	ONU_unknown_frame_number
ifOutOctets	ONU_octets_number
ifOutUcastPkts	ONU_unicast_frame_number
ifOutNUcastPkts	ONU_non_unicast_frame_number
ifOutDiscards	ONU_discard_frame_number
ifOutErrors	ONU_error_frame_number
ifOutQLen	ONU_queue_frame_number

<sup>a</sup>ONU\_MAC\_Address is the MAC address of the ONU EPON interface.

Table 9–6 presents the objects of the Interfaces Group MIB of the ONU interface.

**Table 9–6—Interfaces Group MIB of the ONU interface**

Interfaces Group MIB object	Value
ifIndex	100
ifDescr	“interface description”
ifType	ethernetCsmacd (6) 1000base-Px
ifMtu	MTU size (1522)
ifSpeed	1000000000
ifPhysAddress	ONU_MAC_Address <sup>a</sup>
ifAdminStatus	up
ifOperStatus	Up
ifLastChange	up_time
ifInOctets	ONU1_octets_number
ifInUcastPkts	ONU1_unicast_frame_number
ifInNUcastPkts	ONU1_non_unicast_frame_number
ifInDiscards	ONU1_discard_frame_number
ifInErrors	ONU1_error_frame_number
ifInUnknownProtos	ONU1_unknown_frame_number
ifOutOctets	ONU1_octets_number
ifOutUcastPkts	ONU1_unicast_frame_number
ifOutNUcastPkts	ONU1_non_unicast_frame_number
ifOutDiscards	ONU1_discard_frame_number
ifOutErrors	ONU1_error_frame_number
ifOutQLen	ONU1_queue_frame_number

<sup>a</sup>ONU\_MAC\_Address is the MAC address of the ONU EPON interface.

The following values will be set in the ifStack and ifInvStack tables related to this example.

ifStackTable:

- ifStackHigherLayer = 100, ifStackLowerLayer = 1 – map between the physical interface and the ONU

ifInvStackTable:

- ifStackLowerLayer = 1, ifStackHigherLayer = 100 – map between the ONU and the physical interface

Table 9–7 presents the Interfaces Group MIB objects of an OLT interface.

**Table 9–7—Interfaces Group MIB objects of an OLT interface**

Interfaces Group MIB object	Value
ifIndex	2
ifDescr	“interface description”
ifType	ethernetCsmacd (6) 1000base-Px
ifMtu	MTU size (1522)
ifSpeed	1000000000
ifPhysAddress	OLT_MAC_Address <sup>a</sup>
ifAdminStatus	up
ifOperStatus	Up
ifLastChange	OLTup_time
ifInOctets	OLT_octets_number
ifInUcastPkts	OLT_unicast_frame_number
ifInNUcastPkts	OLT_non_unicast_frame_number
ifInDiscards	OLT_discard_frame_number
ifInErrors	OLT_error_frame_number
ifInUnknownProtos	OLT_unknown_frame_number
ifOutOctets	OLT_octets_number
ifOutUcastPkts	OLT_unicast_frame_number
ifOutNUcastPkts	OLT_non_unicast_frame_number

**Table 9–7—Interfaces Group MIB objects of an OLT interface (continued)**

Interfaces Group MIB object	Value
ifOutDiscards	OLT_discard_frame_number
ifOutErrors	OLT_error_frame_number
ifOutQLen	OLT_queue_frame_number

<sup>a</sup>OLT\_MAC\_Address is the MAC address of the OLT EPON interface.

Table 9–8 presents the Interfaces Group MIB objects of an OLT interface, associated with the virtual link interfaces.

**Table 9–8—Interfaces Group MIB objects of an OLT interface, associated with the virtual link interfaces**

Interface MIB object	Value	Value	Value
ifIndex	200001	200002	265535
ifDescr	"interface description"	"interface description"	"interface description"
ifType	ethernetCsmacd (6)	ethernetCsmacd (6)	ethernetCsmacd (6)
ifMtu	MTUsize(1522)	MTUsize(1522)	MTUsize(1522)
ifSpeed	1000000000	1000000000	1000000000
ifPhysAddress	OLT_MAC_Address <sup>a</sup>	OLT_MAC_Address	OLT_MAC_Address
ifAdminStatus	up	up	up
ifOperStatus	Up	Up	Up
ifLastChange	ONU1_up_time	ONU2_up_time	up_time
ifInOctets	ONU1_octets_number	ONU2_octets_number	BRCT_octets_number
ifInUcastPkts	ONU1_unic_frame_num	ONU2_unic_frame_num	BRCT_unic_frame_num
ifInNUcastPkts	ONU1_non_unic_frame_num	ONU2_non_unic_frame_num	BRCT_non_unic_frame_num
ifInDiscards	ONU1_disc_frame_num	ONU2_disc_frame_num	BRCT_disc_frame_numr
ifInErrors	ONU1_err_frame_num	ONU2_err_frame_num	BRCT_err_frame_num
ifInUnknownProtos	ONU1_unknw_frame_num	ONU2_unknw_frame_num	BRCT_unknw_frame_num
ifOutOctets	ONU1_octets_number	ONU2_octets_number	BRCT_octets_number
ifOutUcastPkts	ONU1_unic_frame_num	ONU2_unic_frame_num	BRCT_unic_frame_num
ifOutNUcastPkts	ONU1_non_unic_frame_num	ONU2_non_unic_frame_num	BRCT_non_unic_frame_num

**Table 9–8—Interfaces Group MIB objects of an OLT interface, associated with the virtual link interfaces (*continued*)**

Interface MIB object	Value	Value	Value
ifOutDiscards	ONU1_disc_frame_num	ONU2_disc_frame_num	BRCT_disc_frame_num
ifOutErrors	ONU1_err_frame_num	ONU2_err_frame_num	BRCT_err_frame_num
ifOutQLen	ONU1_queue_frame_num	ONU2_queue_frame_num	BRCT_queue_frame_num

<sup>a</sup>OLT\_MAC\_Address is the MAC address of the OLT EPON interface.

The following values will be set in the ifStack and ifInvStack tables related to this example:

ifStackTable:

- ifStackHigherLayer = 265535, ifStackLowerLayer = 2 – map between the OLT physical interface and its broadcast virtual interface
- ifStackHigherLayer = 200001, ifStackLowerLayer = 2 – map between the OLT physical interface and its virtual interface of the 1st ONU
- ifStackHigherLayer = 200002, ifStackLowerLayer = 2 – map between the OLT physical interface and its virtual interface of the 2nd ONU
- ifStackHigherLayer = 200003, ifStackLowerLayer = 2 – map between the OLT physical interface and its virtual interface of the 3rd ONU

ifInvStackTable:

- ifStackLowerLayer = 2, ifStackHigherLayer = 265535 – map between the broadcast interface of the OLT and the OLT physical interface
- ifStackLowerLayer = 2, ifStackHigherLayer = 200001 – map between the OLT virtual interface of the 1st ONU and the OLT physical interface
- ifStackLowerLayer = 2, ifStackHigherLayer = 200002 – map between the OLT virtual interface of the 2nd ONU and the OLT physical interface
- ifStackLowerLayer = 2, ifStackHigherLayer = 200003 – map between the OLT virtual interface of the 3rd ONU and the OLT physical interface

The rows for the ONU interface, the OLT interface, and the OLT broadcast interface are created in initialization. The creation of a row for a virtual link is done when the virtual link is established (ONU registers), and deletion is done when the virtual link is deleted (ONU deregisters).

The EPON MIB module also extends the Interfaces Group MIB module with a set of counters, which are specific for the EPON interface. The EPON MIB module implements the same handling of the counters when the operation of the interface starts or stops. The interface MIB clause describes the possible behavior of counters when an interface is re-initialized using the ifCounterDiscontinuityTime indicator, indicating the discontinuity of the counters. See IETF RFC 2863, Section 3.1.5, for more information. The counters of the EPON MIB should be handled in a similar manner.

### 9.3.2 Relation to the IEEE 802.3 MAU MIBs

The MAU types of the EPON Interface are defined in the Clause 13. This clause assumes the implementation of the MAU MIB for this purpose and does not repeat the EPON MAU types. Therefore, if this module is implemented, the MAU-MIB module defined in Clause 13 shall also be implemented.

The handling of the ifMAU tables for the EPON case is similar to the handling described in the former subclause for the Interface and Ethernet-like interface MIBs. A single row exists for the ONU in the ifMauTable. A row for each virtual link (N+1 rows) exists at the OLT, with a separate value of ifMauIfIndex for each virtual link.

As specified above, the rows for the ONU interface, the OLT interface, and the OLT broadcast interface are created in initialization. The creation of a row for a virtual link is done when the virtual link is established (ONU registers), and deletion is done when the virtual link is deleted (ONU deregisters).

### 9.3.3 Relation to the Ethernet OAM MIB

The EPON interfaces are intended for use in optical subscriber access networks and most probably will be accompanied with the implementation of the OAM protocol defined in Clause 57 of IEEE Std 802.3. Therefore, the Ethernet OAM MIB module defined in Clause 6 may be implemented when this MIB module is implemented defining managed objects for the OAM protocol that are complementary to the EPON MIB module.

### 9.3.4 Relation to the bridge MIB

It is very probable that an EPON OLT will implement a bridging functionality above the EPON interface layer, bridging between the EPON users and the network. Bridge functionality is specified in IEEE Std 802.1D. In this scenario, the virtual ports of the EPON are corresponding to the virtual bridge ports. There is a direct mapping between the bridge ports and the LLIDs, which are virtual EPON channels.

Therefore, the bridge MIB modules defined in IEEE Std 802.1Q [B4] may be implemented when the EPON MIB module is implemented for an EPON OLT, defining managed objects for the bridge layer.

The values of dot1dBasePortIfIndex would correspond to the ifIndex of the virtual port (1 for LLID1, 2 for LLID2, etc.).

The broadcast virtual EPON interface of the OLT has no direct mapping to a virtual bridge port as it is not port specific but used for broadcast traffic.

## 9.4 Mapping of IEEE 802.3 managed objects

This subclause contains the mapping between the managed objects defined in this clause and the attributes defined in IEEE Std 802.3 Clause 30. Table 9–9 provides the mapping between the dot3EPON MIB module MPCP objects and the IEEE Std 802.3 Clause 30 MPCP attributes.

Table 9–10 provides the mapping between the dot3EPON MIB module OMPEmulation objects and IEEE Std 802.3 Clause 30 OMPE attributes.

Table 9–11 provides the mapping between the dot3EPON MIB module FEC objects and IEEE Std 802.3 Clause 30 MAU attributes.

**Table 9–9—oMPCP managed object class (30.3.5)**

<b>dot3EPON MIB module object</b>	<b>IEEE 802.3 attribute</b>	<b>Reference</b>
ifIndex	aMPCPID	30.3.5.1.1
dot3MpcpOperStatus	aMPCPAdminState	30.3.5.1.2
dot3MpcpMode	aMPCPMode	30.3.5.1.3
dot3MpcpLinkID	aMPCPLinkID	30.3.5.1.4
dot3MpcpRemoteMACAddress	aMPCPRemoteMACAddress	30.3.5.1.5
dot3MpcpRegistrationState	aMPCPRegistrationState	30.3.5.1.6
dot3MpcpMACCtrlFramesTransmitted	aMPCPMACCtrlFramesTransmitted	30.3.5.1.7
dot3MpcpMACCtrlFramesReceived	aMPCPMACCtrlFramesReceived	30.3.5.1.8
dot3MpcpTxGate	aMPCPTxGate	30.3.5.1.9
dot3MpcpTxRegAck	aMPCPTxRegAck	30.3.5.1.10
dot3MpcpTxRegister	aMPCPTxRegister	30.3.5.1.11
dot3MpcpTxRegRequest	aMPCPTxRegRequest	30.3.5.1.12
dot3MpcpTxReport	aMPCPTxReport	30.3.5.1.13
dot3MpcpRxGate	aMPCPRxGate	30.3.5.1.14
dot3MpcpRxRegAck	aMPCPRxRegAck	30.3.5.1.15
dot3MpcpRxRegister	aMPCPRxRegister	30.3.5.1.16
dot3MpcpRxRegRequest	aMPCPRxRegRequest	30.3.5.1.17
dot3MpcpRxReport	aMPCPRxReport	30.3.5.1.18
dot3MpcpTransmitElapsed	aMPCPTransmitElapsed	30.3.5.1.19
dot3MpcpReceiveElapsed	aMPCPReceiveElapsed	30.3.5.1.20
dot3MpcpRoundTripTime	aMPCPRoundTripTime	30.3.5.1.21
dot3MpcpDiscoveryWindowsSent	aMPCPDiscoveryWindowsSent	30.3.5.1.22
dot3MpcpDiscoveryTimeout	aMPCPDiscoveryTimeout	30.3.5.1.23
dot3MpcpMaximumPendingGrants	aMPCPMaximumPendingGrants	30.3.5.1.24
dot3MpcpAdminState	aMPCPAdminControl	30.3.5.2.1
dot3MpcpSyncTime	SyncTime	64.3.3.2

**Table 9–10—oMPEmulation managed object class (30.3.7)**

dot3EPON MIB module object	IEEE 802.3 attribute	Reference
ifIndex	aOMPEmulationID	30.3.7.1.1
dot3OmpEmulationType	aOMPEmulationType	30.3.7.1.2
dot3OmpEmulationSLDErrors	aSLDErrors	30.3.7.1.3
dot3OmpEmulationCRC8Errors	aCRC8Errors	30.3.7.1.4
dot3OmpEmulationGoodLLID	aGoodLLID	30.3.7.1.5
dot3OmpEmulationOnuPonCastLLID	aONUPONcastLLID	30.3.7.1.6
dot3OmpEmulationOltPonCastLLID	aOLTPONcastLLID	30.3.7.1.7
dot3OmpEmulationBadLLID	aBadLLID	30.3.7.1.8
dot3OmpEmulationBroadcastBitNotOnuLLid	N/A	
dot3OmpEmulationOnuLLIDNotBroadcast	N/A	
dot3OmpEmulationBroadcastBitPlusOnuLlid	N/A	
dot3OmpEmulationNotBroadcastBitNotOnuLlid	N/A	

**Table 9–11—oMAU managed object class (30.5.1)**

dot3EPON MIB module object	IEEE 802.3 attribute	Reference
dot3EponFecPCSCodingViolation	aPCSCodingViolation	30.5.1.1.12
dot3EponFecAbility	aFECAbility	30.5.1.1.13
dot3EponFecMode	aFECmode	30.5.1.1.14
dot3EponFecCorrectedBlocks	aFECCorrectedBlocks	30.5.1.1.15
dot3EponFecUncorrectableBlocks	aFECUncorrectableBlocks	30.5.1.1.16
dot3EponFecBufferHeadCodingViolation	N/A	

## **9.5 Security considerations for Ethernet passive optical networks (EPON) MIB module**

There are number of managed objects defined in this MIB module that have a MAX-ACCESS clause of read-write or read-create. Writing to these objects can have potentially disruptive effects on network operation, including those listed in 9.5.1 to 9.5.13.

### **9.5.1 dot3MpcpAdminState**

Changing dot3MpcpAdminState state can lead to disabling the Multipoint Control Protocol on the respective interface, leading to the interruption of service for the users connected to the respective EPON interface.

### **9.5.2 dot3EponFecMode**

Changing dot3EponFecMode state can lead to disabling the Forward Error Correction on the respective interface, which can lead to a degradation of the optical link, and therefore may lead to an interruption of service for the users connected to the respective EPON interface.

### **9.5.3 dot3ExtPkgObjectReset**

Changing dot3ExtPkgObjectReset state can lead to a reset of the respective interface leading to an interruption of service for the users connected to the respective EPON interface.

### **9.5.4 dot3ExtPkgObjectPowerDown**

Changing dot3ExtPkgObjectPowerDown state can lead to a power down of the respective interface, leading to an interruption of service for the users connected to the respective EPON interface.

### **9.5.5 dot3ExtPkgObjectFecEnabled**

Changing dot3ExtPkgObjectFecEnabled state can lead to disabling the Forward Error Correction on the respective interface, which can lead to a degradation of the optical link, and therefore may lead to an interruption of service for the users connected to the respective EPON interface.

### **9.5.6 dot3ExtPkgObjectRegisterAction**

Changing dot3ExtPkgObjectRegisterAction state can lead to a change in the registration state of the respective interface, leading to a deregistration and an interruption of service for the users connected to the respective EPON interface.

### **9.5.7 dot3ExtPkgObjectReportNumThreshold**

Changing dot3ExtPkgObjectReportNumThreshold can lead to a change in the reporting of the ONU interface and therefore to a change in the bandwidth allocation of the respective interface. This change may lead to a degradation or an interruption of service for the users connected to the respective EPON interface.

### **9.5.8 dot3ExtPkgObjectReportThreshold**

Changing dot3ExtPkgObjectReportThreshold can lead to a change in the reporting of the ONU interface and therefore to a change in the bandwidth allocation of the respective interface. This change may lead to a degradation or an interruption of service for the users connected to the respective EPON interface.

### 9.5.9 dot3ExtPkgOptIfLowerInputPowerThreshold

Changing dot3ExtPkgOptIfLowerInputPowerThreshold can lead to a Threshold Crossing Alert (TCA) being sent for the respective interface. This alert may be leading to an interruption of service for the users connected to the respective EPON interface, depending on the system action on such an alert.

### 9.5.10 dot3ExtPkgOptIfUpperInputPowerThreshold

Changing dot3ExtPkgOptIfUpperInputPowerThreshold can lead to a Threshold Crossing Alert (TCA) being sent for the respective interface. This alert may be leading to an interruption of service for the users connected to the respective EPON interface, depending on the system action on such an alert.

### 9.5.11 dot3ExtPkgOptIfLowerOutputPowerThreshold

Changing dot3ExtPkgOptIfLowerOutputPowerThreshold can lead to a Threshold Crossing Alert (TCA) being sent for the respective interface. This alert may be leading to an interruption of service for the users connected to the respective EPON interface, depending on the system action on such an alert.

### 9.5.12 dot3ExtPkgOptIfUpperOutputPowerThreshold

Changing dot3ExtPkgOptIfUpperOutputPowerThreshold can lead to a Threshold Crossing Alert (TCA) being sent for the respective interface. This alert may be leading to an interruption of service for the users connected to the respective EPON interface, depending on the system action on such an alert.

### 9.5.13 dot3ExtPkgOptIfTransmitEnable

**9.6** Changing dot3ExtPkgOptIfTransmitEnable state can lead to a halt in the optical transmission of the respective interface, leading to an interruption of service for the users connected to the respective EPON interface. **MIB module definition**

An ASCII text version of the MIB definition can be found at the following URL:<sup>15</sup>

[http://www.ieee802.org/3/be/public/mib\\_modules/20110202/802dot3dot1C9mib.txt](http://www.ieee802.org/3/be/public/mib_modules/20110202/802dot3dot1C9mib.txt)

---

<sup>15</sup>Copyright release for MIB modules: Users of this standard may freely reproduce the MIB module contained in this subclause so that it can be used for its intended purpose.

```

IEEE8023-DOT3-EPON-MIB DEFINITIONS ::= BEGIN

    IMPORTS
        MODULE-IDENTITY, OBJECT-TYPE, Counter32,
        Integer32, Unsigned32, Counter64, org
        FROM SNMPv2-SMI
        TruthValue, MacAddress
        FROM SNMPv2-TC
        ifIndex
        FROM IF-MIB
        MODULE-COMPLIANCE, OBJECT-GROUP
        FROM SNMPv2-CONF
    ;

ieee8023dot3EponMIB MODULE-IDENTITY
    LAST-UPDATED "201102020000Z" -- February 2, 2011
    ORGANIZATION
        "IEEE 802.3 working group"
    CONTACT-INFO
        "WG-URL: http://www.ieee802.org/3/index.html
        WG-EMail: STDS-802-3-MIB@LISTSERV.IEEE.ORG

        Contact: Howard Frazier
        Postal: 3151 Zanker Road
                San Jose, CA 95134
                USA
        Tel:      +1.408.922.8164
        E-mail:   hfrazier@broadcom.com"
    DESCRIPTION
        "The objects in this MIB module are used to manage the
        Ethernet in the First Mile (EFM) Ethernet Passive Optical
        Network (EPON) Interfaces as defined in IEEE Std 802.3
        Clauses 60, 64, and 65.

        Of particular interest are Clause 64 (Multi-Point Control
        Protocol - MPCP), Clause 65 (Point-to-Multipoint
        Reconciliation Sublayer - P2MP RS), Clause 60 (Ethernet
        Passive Optical Network Physical Medium Dependent - EPON
        PMDs), Clause 30, 'Management', and Clause 45, 'Management
        Data Input/Output (MDIO) Interface'."

    REVISION      "201102020000Z" -- February 2, 2011
    DESCRIPTION
        "Initial version, based on an earlier version published as RFC 4837."

    ::= { org ieee(111) standards-association-numbers-series-standards(2)
        lan-man-stds(802) ieee802dot3(3) ieee802dot3dot1mibs(1) 9 }

dot3EponObjects OBJECT IDENTIFIER ::= { ieee8023dot3EponMIB 1}

dot3EponConformance OBJECT IDENTIFIER ::= { ieee8023dot3EponMIB 2}

-- MPCP MIB modules definitions (IEEE Std 802.3, Clause 30.3.5)

dot3EponMpcpObjects
    OBJECT IDENTIFIER ::= { dot3EponObjects 1 }

dot3MpcpControlTable OBJECT-TYPE
    SYNTAX SEQUENCE OF Dot3MpcpControlEntry

```

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A Table of dot3 Multi-Point Control Protocol (MPCP) MIB objects. The entries in the table are control and status objects of the MPCP. Each object has a row for every virtual link denoted by the corresponding ifIndex. The LLID field, as defined in the IEEE Std 802.3, is a 2-byte register (15-bit field and a broadcast bit) limiting the number of virtual links to 32768. Typically the number of expected virtual links in a PON is like the number of ONUs, which is 32-64, plus an additional entry for broadcast LLID."

::= { dot3EponMpcpObjects 1 }

dot3MpcpControlEntry OBJECT-TYPE

SYNTAX Dot3MpcpControlEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in the dot3 MPCP Control table. Rows exist for an OLT interface and an ONU interface. A row in the table is denoted by the ifIndex of the link and it is created when the ifIndex is created. The rows in the table for an ONU interface are created at system initialization. The row in the table corresponding to the OLT ifIndex and the row corresponding to the broadcast virtual link are created at system initialization. A row in the table corresponding to the ifIndex of a virtual links is created when a virtual link is established (ONU registers) and deleted when the virtual link is deleted (ONU deregisters)."

INDEX { ifIndex }

::= { dot3MpcpControlTable 1 }

Dot3MpcpControlEntry ::=

```
SEQUENCE {
    dot3MpcpOperStatus          TruthValue,
    dot3MpcpAdminState          TruthValue,
    dot3MpcpMode                 INTEGER,
    dot3MpcpSyncTime             Unsigned32,
    dot3MpcpLinkID               Unsigned32,
    dot3MpcpRemoteMACAddress     MacAddress,
    dot3MpcpRegistrationState    INTEGER,
    dot3MpcpTransmitElapsed      Unsigned32,
    dot3MpcpReceiveElapsed       Unsigned32,
    dot3MpcpRoundTripTime        Unsigned32,
    dot3MpcpMaximumPendingGrants Unsigned32
}
```

dot3MpcpOperStatus OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object reflects the operational state of the Multi-Point MAC Control sublayer as defined in

IEEE Std 802.3, Clause 64. When the value is true(1), the interface will act as if the Multi-Point Control Protocol is enabled. When the value is false(2), the interface will act as if the Multi-Point Control Protocol is disabled. The operational state can be changed using the dot3MpcpAdminState object.

This object is applicable for an OLT, with the same value for all virtual interfaces, and for an ONU."

REFERENCE "IEEE Std 802.3, 30.3.5.1.2."

::= { dot3MpcpControlEntry 1 }

dot3MpcpAdminState OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This object is used to define the admin state of the Multi-Point MAC Control sublayer, as defined in IEEE Std 802.3, Clause 64, and to reflect its state. When selecting the value as true(1), the Multi-Point Control Protocol of the interface is enabled. When selecting the value as false(2), the Multi-Point Control Protocol of the interface is disabled. This object reflects the administrative state of the Multi-Point Control Protocol of the interface. The write operation is not restricted in this document and can be done at any time. Changing dot3MpcpAdminState state can lead to disabling the Multi-Point Control Protocol on the respective interface, leading to the interruption of service for the users connected to the respective EPON interface. This object is applicable for an OLT, with the same value for all virtual interfaces, and for an ONU."

REFERENCE "IEEE Std 802.3, 30.3.5.2.1."

DEFVAL { false }

::= { dot3MpcpControlEntry 2 }

dot3MpcpMode OBJECT-TYPE

SYNTAX INTEGER {

olt(1),

onu(2)

}

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"This object is used to identify the operational state of the Multi-Point MAC Control sublayer as defined in IEEE Std 802.3, Clause 64. Reading olt(1) for an OLT (server) mode and onu(2) for an ONU (client) mode. This object is used to identify the operational mode for the MPCP tables. This object is applicable for an OLT, with the same value for all virtual interfaces, and for an ONU."

REFERENCE "IEEE Std 802.3, 30.3.5.1.3."

DEFVAL { olt }

::= { dot3MpcpControlEntry 3 }

dot3MpcpSyncTime OBJECT-TYPE

SYNTAX Unsigned32

```

UNITS          "TQ (16 ns)"
MAX-ACCESS    read-only
STATUS        current
DESCRIPTION
    "An object that reports the 'sync lock time' of the
    OLT receiver in increments of Time Quanta (TQ)-16ns
    as defined in IEEE Std 802.3, Clauses 60, 64, and 65. The
    value returned shall be (sync lock time ns)/16, rounded up
    to the nearest TQ. If this value exceeds (2^32-1), the
    value (2^32-1) shall be returned. This object is applicable
    for an OLT, with distinct values for all virtual interfaces,
    and for an ONU."
REFERENCE     "IEEE Std 802.3, 64.3.3.2."
 ::= { dot3MpcpControlEntry 4 }

```

```

dot3MpcpLinkID OBJECT-TYPE
SYNTAX        Unsigned32
MAX-ACCESS    read-only
STATUS        current
DESCRIPTION
    "An object that identifies the Logical Link
    Identifier (LLID) associated with the MAC of the virtual
    link as specified in IEEE Std 802.3, 65.1.3.2.2.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
    The ONU and the corresponding virtual MAC of the OLT,
    for the same virtual link, have the same value.
    Value is assigned when the ONU registers.
    Value is freed when the ONU deregisters."
REFERENCE     "IEEE Std 802.3, 30.3.5.1.4."
 ::= { dot3MpcpControlEntry 5 }

```

```

dot3MpcpRemoteMACAddress OBJECT-TYPE
SYNTAX        MacAddress
MAX-ACCESS    read-only
STATUS        current
DESCRIPTION
    "An object that identifies the source_address
    parameter of the last MPCPDUs passed to the MAC Control.
    This value is updated on reception of a valid frame with
    1) a destination Field equal to the reserved multicast
    address for MAC Control as specified in [802.3], Annex
    31A; 2) the lengthOrType field value equal to the reserved
    Type for MAC Control as specified in [802.3], Annex
    31A; 3) an MPCP subtype value equal to the subtype
    reserved for MPCP as specified in IEEE Std 802.3, Annex 31A.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
    The value reflects the MAC address of the remote entity
    and therefore the OLT holds a value for each LLID, which
    is the MAC address of the ONU; the ONU has a single
    value that is the OLT MAC address."
REFERENCE     "IEEE Std 802.3, 30.3.5.1.5."
 ::= { dot3MpcpControlEntry 6 }

```

```

dot3MpcpRegistrationState OBJECT-TYPE
SYNTAX        INTEGER {
    unregistered(1),
    registering(2),

```

```

        registered(3)
    }
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "An object that identifies the registration state
        of the Multi-Point MAC Control sublayer as defined in
        IEEE Std 802.3, Clause 64. When this object has the
        enumeration unregistered(1), the interface is
        unregistered and may be used for registering a link
        partner. When this object has the enumeration
        registering(2), the interface is in the process of
        registering a link-partner. When this object has the
        enumeration registered(3), the interface has an
        established link-partner.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface."
    REFERENCE "IEEE Std 802.3, 30.3.5.1.6."
    ::= { dot3MpcpControlEntry 7 }

dot3MpcpTransmitElapsed OBJECT-TYPE
    SYNTAX Unsigned32
    UNITS "TQ (16 ns)"
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "An object that reports the interval from the last
        MPCP frame transmission in increments of Time Quanta
        (TQ)-16ns. The value returned shall be (interval from
        last MPCP frame transmission in ns)/16. If this value
        exceeds (2^32-1), the value (2^32-1) shall be returned.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface."
    REFERENCE "IEEE Std 802.3, 30.3.5.1.19."
    ::= { dot3MpcpControlEntry 8 }

dot3MpcpReceiveElapsed OBJECT-TYPE
    SYNTAX Unsigned32
    UNITS "TQ (16 ns)"
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "An object that reports the interval from last MPCP frame
        reception in increments of Time Quanta (TQ)-16ns. The
        value returned shall be (interval from last MPCP frame
        reception in ns)/16. If this value exceeds (2^32-1), the
        value (2^32-1) shall be returned.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface."
    REFERENCE "IEEE Std 802.3, 30.3.5.1.20."
    ::= { dot3MpcpControlEntry 9 }

dot3MpcpRoundTripTime OBJECT-TYPE
    SYNTAX Unsigned32 (0..'ffff'h)
    UNITS "TQ (16 ns)"
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "An object that reports the MPCP round trip time in

```

increments of Time Quanta (TQ)-16ns. The value returned shall be (round trip time in ns)/16. If this value exceeds  $(2^{16}-1)$ , the value  $(2^{16}-1)$  shall be returned. This object is applicable for an OLT. At the OLT, it has a distinct value for each virtual interface."

REFERENCE "IEEE Std 802.3, 30.3.5.1.21."  
 ::= { dot3MpcpControlEntry 10 }

dot3MpcpMaximumPendingGrants OBJECT-TYPE

SYNTAX Unsigned32 (0..255)  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION

"An object that reports the maximum number of grants that an ONU can store for handling. The maximum number of grants that an ONU can store for handling has a range of 0 to 255. This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. At the OLT, the value should be zero."

REFERENCE "IEEE Std 802.3, 30.3.5.1.24."  
 ::= { dot3MpcpControlEntry 11 }

dot3MpcpStatTable OBJECT-TYPE

SYNTAX SEQUENCE OF Dot3MpcpStatEntry  
 MAX-ACCESS not-accessible  
 STATUS current  
 DESCRIPTION

"This table defines the list of statistics counters of an interface implementing the IEEE Std 802.3, Clause 64 MPCP. Each object has a row for every virtual link denoted by the corresponding ifIndex. The LLID field, as defined in IEEE Std 802.3, is a 2-byte register (15-bit field and a broadcast bit) limiting the number of virtual links to 32768. Typically the number of expected virtual links in a PON is like the number of ONUs, which is 32-64, plus an additional entry for broadcast LLID."

::= { dot3EponMpcpObjects 2 }

dot3MpcpStatEntry OBJECT-TYPE

SYNTAX Dot3MpcpStatEntry  
 MAX-ACCESS not-accessible  
 STATUS current  
 DESCRIPTION

"An entry in the table of statistics counters of the IEEE Std 802.3, Clause 64, MPCP interface. Rows exist for an OLT interface and an ONU interface. A row in the table is denoted by the ifIndex of the link and it is created when the ifIndex is created. The rows in the table for an ONU interface are created at system initialization. The row in the table corresponding to the OLT ifIndex and the row corresponding to the broadcast virtual link are created at system initialization. A row in the table corresponding to the ifIndex of a virtual link is created when a virtual link is established (ONU registers) and deleted when the virtual link is deleted (ONU deregisters)."

```

INDEX { ifIndex }
 ::= { dot3MpcpStatTable 1 }

```

```
Dot3MpcpStatEntry ::=
```

```

SEQUENCE {
    dot3MpcpMACCtrlFramesTransmitted      Counter64,
    dot3MpcpMACCtrlFramesReceived         Counter64,
    dot3MpcpDiscoveryWindowsSent          Counter32,
    dot3MpcpDiscoveryTimeout               Counter32,
    dot3MpcpTxRegRequest                   Counter64,
    dot3MpcpRxRegRequest                   Counter64,
    dot3MpcpTxRegAck                       Counter64,
    dot3MpcpRxRegAck                       Counter64,
    dot3MpcpTxReport                       Counter64,
    dot3MpcpRxReport                       Counter64,
    dot3MpcpTxGate                         Counter64,
    dot3MpcpRxGate                         Counter64,
    dot3MpcpTxRegister                     Counter64,
    dot3MpcpRxRegister                     Counter64
}

```

```
dot3MpcpMACCtrlFramesTransmitted OBJECT-TYPE
```

```
SYNTAX Counter64
```

```
UNITS "frames"
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

"A count of MPCP frames passed to the MAC sublayer for transmission. This counter is incremented when a MA\_CONTROL.request service primitive is generated within the MAC control sublayer with an opcode indicating an MPCP frame.

This object is applicable for an OLT and an ONU. At the OLT it has a distinct value for each virtual interface. Discontinuities of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

```
REFERENCE "IEEE Std 802.3, 30.3.5.1.7."
```

```
::= { dot3MpcpStatEntry 1 }
```

```
dot3MpcpMACCtrlFramesReceived OBJECT-TYPE
```

```
SYNTAX Counter64
```

```
UNITS "frames"
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

"A count of MPCP frames passed by the MAC sublayer to the MAC Control sublayer. This counter is incremented when a ReceiveFrame function call returns a valid frame with

- 1) a lengthOrType field value equal to the reserved Type for 802.3\_MAC\_Control as specified in IEEE Std 802.3 31.4.1.3, and
- 2) an opcode indicating an MPCP frame.

This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. Discontinuities of this counter can occur at re-initialization of the management system and at other

times, as indicated by the value of the  
ifCounterDiscontinuityTime object of the Interfaces Group MIB  
module."

REFERENCE "IEEE Std 802.3, 30.3.5.1.8."  
 ::= { dot3MpcpStatEntry 2 }

dot3MpcpDiscoveryWindowsSent OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of discovery windows generated. The counter is incremented by one for each generated discovery window. This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. At the ONU, the value should be zero. Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

REFERENCE "IEEE Std 802.3, 30.3.5.1.22."  
 ::= { dot3MpcpStatEntry 3 }

dot3MpcpDiscoveryTimeout OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of the number of times a discovery timeout occurs. Increment the counter by one for each discovery processing state-machine reset resulting from timeout waiting for message arrival. This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

REFERENCE "IEEE Std 802.3, 30.3.5.1.23."  
 ::= { dot3MpcpStatEntry 4 }

dot3MpcpTxRegRequest OBJECT-TYPE

SYNTAX Counter64

UNITS "frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of the number of times a REGISTER\_REQ MPCP frame transmission occurs. Increment the counter by one for each REGISTER\_REQ MPCP frame transmitted as defined in IEEE Std 802.3, Clause 64. This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. At the OLT, the value should be zero. Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the

```
        ifCounterDiscontinuityTime object of the Interfaces Group MIB
        module."
REFERENCE   "IEEE Std 802.3, 30.3.5.1.12."
 ::= { dot3MpcpStatEntry 5}

dot3MpcpRxRegRequest OBJECT-TYPE
SYNTAX Counter64
UNITS      "frames"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "A count of the number of times a REGISTER_REQ MPCP
    frame reception occurs.
    Increment the counter by one for each REGISTER_REQ MPCP
    frame received as defined in IEEE Std 802.3, Clause 64.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
    At the ONU, the value should be zero.
    Discontinuities of this counter can occur at
    re-initialization of the management system and at other
    times, as indicated by the value of the
    ifCounterDiscontinuityTime object of the Interfaces Group MIB
    module."
REFERENCE   "IEEE Std 802.3, 30.3.5.1.17."
 ::= { dot3MpcpStatEntry 6}

dot3MpcpTxRegAck OBJECT-TYPE
SYNTAX Counter64
UNITS      "frames"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "A count of the number of times a REGISTER_ACK MPCP
    frame transmission occurs. Increment the counter by one
    for each REGISTER_ACK MPCP frame transmitted as defined
    in IEEE Std 802.3, Clause 64.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
    At the ONU, the value should be zero.
    Discontinuities of this counter can occur at
    re-initialization of the management system and at other
    times, as indicated by the value of the
    ifCounterDiscontinuityTime object of the Interfaces Group MIB
    module."
REFERENCE   "IEEE Std 802.3, 30.3.5.1.10."
 ::= { dot3MpcpStatEntry 7}

dot3MpcpRxRegAck OBJECT-TYPE
SYNTAX Counter64
UNITS      "frames"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "A count of the number of times a REGISTER_ACK MPCP
    frame reception occurs.
    Increment the counter by one for each REGISTER_ACK MPCP
    frame received as defined in IEEE Std 802.3, Clause 64.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
```

At the ONU, the value should be zero.  
 Discontinuities of this counter can occur at  
 re-initialization of the management system and at other  
 times, as indicated by the value of the  
 ifCounterDiscontinuityTime object of the Interfaces Group MIB  
 module."

REFERENCE "IEEE Std 802.3, 30.3.5.1.15."

::= { dot3MpcpStatEntry 8 }

dot3MpcpTxReport OBJECT-TYPE

SYNTAX Counter64

UNITS "frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of the number of times a REPORT MPCP frame  
 transmission occurs. Increment the counter by one for  
 each REPORT MPCP frame transmitted as defined in  
 IEEE Std 802.3, Clause 64.

This object is applicable for an OLT and an ONU. At the  
 OLT, it has a distinct value for each virtual interface.  
 At the OLT, the value should be zero.

Discontinuities of this counter can occur at  
 re-initialization of the management system and at other  
 times, as indicated by the value of the  
 ifCounterDiscontinuityTime object of the Interfaces Group MIB  
 module."

REFERENCE "IEEE Std 802.3, 30.3.5.1.13."

::= { dot3MpcpStatEntry 9 }

dot3MpcpRxReport OBJECT-TYPE

SYNTAX Counter64

UNITS "frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of the number of times a REPORT MPCP frame  
 reception occurs.

Increment the counter by one for each REPORT MPCP frame  
 received as defined in IEEE Std 802.3, Clause 64.

This object is applicable for an OLT and an ONU. At the  
 OLT, it has a distinct value for each virtual interface.  
 At the ONU, the value should be zero.

Discontinuities of this counter can occur at  
 re-initialization of the management system and at other  
 times, as indicated by the value of the  
 ifCounterDiscontinuityTime object of the Interfaces Group MIB  
 module."

REFERENCE "IEEE Std 802.3, 30.3.5.1.18."

::= { dot3MpcpStatEntry 10 }

dot3MpcpTxGate OBJECT-TYPE

SYNTAX Counter64

UNITS "frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of the number of times a GATE MPCP frame  
 transmission occurs.

Increment the counter by one for each GATE MPCP frame transmitted as defined in IEEE Std 802.3, Clause 64. This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. At the ONU, the value should be zero. Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

REFERENCE "IEEE Std 802.3, 30.3.5.1.9."  
 ::= { dot3MpcpStatEntry 11}

dot3MpcpRxGate OBJECT-TYPE

SYNTAX Counter64  
UNITS "frames"  
MAX-ACCESS read-only  
STATUS current  
DESCRIPTION

"A count of the number of times a GATE MPCP frame reception occurs. Increment the counter by one for each GATE MPCP frame received as defined in IEEE Std 802.3, Clause 64. This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. At the OLT, the value should be zero. Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

REFERENCE "IEEE Std 802.3, 30.3.5.1.14."  
 ::= { dot3MpcpStatEntry 12}

dot3MpcpTxRegister OBJECT-TYPE

SYNTAX Counter64  
UNITS "frames"  
MAX-ACCESS read-only  
STATUS current  
DESCRIPTION

"A count of the number of times a REGISTER MPCP frame transmission occurs. Increment the counter by one for each REGISTER MPCP frame transmitted as defined in IEEE Std 802.3, Clause 64. This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. At the ONU, the value should be zero. Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

REFERENCE "IEEE Std 802.3, 30.3.5.1.11."  
 ::= { dot3MpcpStatEntry 13}

dot3MpcpRxRegister OBJECT-TYPE

SYNTAX Counter64  
UNITS "frames"  
MAX-ACCESS read-only

```

STATUS current
DESCRIPTION
    "A count of the number of times a REGISTER MPCP frame
    reception occurs.
    Increment the counter by one for each REGISTER MPCP
    frame received as defined in IEEE Std 802.3, Clause 64.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
    At the OLT, the value should be zero.
    Discontinuities of this counter can occur at
    re-initialization of the management system and at other
    times, as indicated by the value of the
    ifCounterDiscontinuityTime object of the Interfaces Group MIB
    module."
REFERENCE "IEEE Std 802.3, 30.3.5.1.16."
 ::= { dot3MpcpStatEntry 14}

-- Optical Multi Point Emulation (OMPEmulation)
-- managed object definitions

dot3OmpEmulationObjects OBJECT IDENTIFIER ::= {dot3EponObjects 2}

dot3OmpEmulationTable OBJECT-TYPE
    SYNTAX SEQUENCE OF Dot3OmpEmulationEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "A table of dot3 OmpEmulation MIB objects. The table
        contain objects for the management of the OMPEmulation
        sublayer.
        Each object has a row for every virtual link denoted by
        the corresponding ifIndex.
        The LLID field, as defined in the IEEE Std 802.3, is a 2-byte
        register (15-bit field and a broadcast bit) limiting the
        number of virtual links to 32768. Typically the number
        of expected virtual links in a PON is like the number of
        ONUs, which is 32-64, plus an additional entry for
        broadcast LLID."
    ::= { dot3OmpEmulationObjects 1 }

dot3OmpEmulationEntry OBJECT-TYPE
    SYNTAX Dot3OmpEmulationEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "An entry in the dot3 OmpEmulation table.
        Rows exist for an OLT interface and an ONU interface.
        A row in the table is denoted by the ifIndex of the link
        and it is created when the ifIndex is created.
        The rows in the table for an ONU interface are created
        at system initialization.
        The row in the table corresponding to the OLT ifIndex
        and the row corresponding to the broadcast virtual link
        are created at system initialization.
        A row in the table corresponding to the ifIndex of a
        virtual links is created when a virtual link is
        established (ONU registers) and deleted when the virtual
        link is deleted (ONU deregisters)."
```

INDEX { ifIndex }

```

 ::= { dot3OmpEmulationTable 1 }

Dot3OmpEmulationEntry ::=
SEQUENCE {
    dot3OmpEmulationType          INTEGER
}

dot3OmpEmulationType OBJECT-TYPE
SYNTAX  INTEGER {
    unknown(1),
    olt(2),
    onu(3)
}
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "An object that indicates the mode of operation
    of the Reconciliation Sublayer for Point-to-Point
    Emulation (see IEEE Std 802.3, 65.1). unknown(1) value
    is assigned in initialization; true state or type is not
    yet known. olt(2) value is assigned when the sublayer is
    operating in OLT mode. onu(3) value is assigned when the
    sublayer is operating in ONU mode.
    This object is applicable for an OLT, with the same
    value for all virtual interfaces, and for an ONU."
REFERENCE  "IEEE Std 802.3, 30.3.7.1.2."
 ::= { dot3OmpEmulationEntry 1}

dot3OmpEmulationStatTable OBJECT-TYPE
SYNTAX      SEQUENCE OF Dot3OmpEmulationStatEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "This table defines the list of statistics counters of
    IEEE Std 802.3, Clause 65, OMPEmulation sublayer.
    Each object has a row for every virtual link denoted by
    the corresponding ifIndex.
    The LLID field, as defined in the IEEE Std 802.3, is a 2-byte
    register (15-bit field and a broadcast bit) limiting the
    number of virtual links to 32768. Typically the number
    of expected virtual links in a PON is like the number of
    ONUs, which is 32-64, plus an additional entry for
    broadcast LLID."
 ::= { dot3OmpEmulationObjects 2}

dot3OmpEmulationStatEntry OBJECT-TYPE
SYNTAX      Dot3OmpEmulationStatEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "An entry in the table of statistics counters of
    IEEE Std 802.3, Clause 65, OMPEmulation sublayer.
    Rows exist for an OLT interface and an ONU interface.
    A row in the table is denoted by the ifIndex of the link
    and it is created when the ifIndex is created.
    The rows in the table for an ONU interface are created
    at system initialization.
    The row in the table corresponding to the OLT ifIndex
    and the row corresponding to the broadcast virtual link

```

are created at system initialization.  
 A row in the table corresponding to the ifIndex of a virtual links is created when a virtual link is established (ONU registers) and deleted when the virtual link is deleted (ONU deregisters)."

```
INDEX { ifIndex }
 ::= { dot3OmpEmulationStatTable 1 }
```

```
Dot3OmpEmulationStatEntry ::=
```

```
SEQUENCE {
    dot3OmpEmulationSLDErrors          Counter64,
    dot3OmpEmulationCRC8Errors        Counter64,
    dot3OmpEmulationBadLLID           Counter64,
    dot3OmpEmulationGoodLLID          Counter64,
    dot3OmpEmulationOnuPonCastLLID    Counter64,
    dot3OmpEmulationOltPonCastLLID    Counter64,
    dot3OmpEmulationBroadcastBitNotOnuLlid Counter64,
    dot3OmpEmulationOnuLLIDNotBroadcast Counter64,
    dot3OmpEmulationBroadcastBitPlusOnuLlid Counter64,
    dot3OmpEmulationNotBroadcastBitNotOnuLlid Counter64
}
```

```
dot3OmpEmulationSLDErrors OBJECT-TYPE
```

```
SYNTAX Counter64
UNITS "frames"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "A count of frames received that do not contain a valid
    SLD field as defined in IEEE Std 802.3, 65.1.3.3.1.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
    Discontinuities of this counter can occur at
    re-initialization of the management system and at other
    times, as indicated by the value of the
    ifCounterDiscontinuityTime object of the Interfaces Group MIB
    module."
REFERENCE "IEEE Std 802.3, 30.3.7.1.3."
 ::= { dot3OmpEmulationStatEntry 1 }
```

```
dot3OmpEmulationCRC8Errors OBJECT-TYPE
```

```
SYNTAX Counter64
UNITS "frames"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "A count of frames received that contain a valid SLD
    field, as defined in IEEE Std 802.3, 65.1.3.3.1, but do
    not pass the CRC-8 check as defined in IEEE Std 802.3,
    65.1.3.3.3.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
    Discontinuities of this counter can occur at
    re-initialization of the management system and at other
    times, as indicated by the value of the
    ifCounterDiscontinuityTime object of the Interfaces Group MIB
    module."
REFERENCE "IEEE Std 802.3, 30.3.7.1.4."
 ::= { dot3OmpEmulationStatEntry 2 }
```

## dot3OmpEmulationBadLLID OBJECT-TYPE

SYNTAX Counter64

UNITS "frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of frames received that contain a valid SLD field, as defined in IEEE Std 802.3, 65.1.3.3.1, and pass the CRC-8 check, as defined in IEEE Std 802.3, 65.1.3.3.3, but are discarded due to the LLID check as defined in IEEE Std 802.3, 65.1.3.3.2.

This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

REFERENCE "IEEE Std 802.3, 30.3.7.1.8."

::= { dot3OmpEmulationStatEntry 3 }

## dot3OmpEmulationGoodLLID OBJECT-TYPE

SYNTAX Counter64

UNITS "frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of frames received that contain a valid SLD field, as defined in IEEE Std 802.3, 65.1.3.3.1, and pass the CRC-8 check as defined in IEEE Std 802.3, 65.1.3.3.3.

This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

REFERENCE "IEEE Std 802.3, 30.3.7.1.5."

::= { dot3OmpEmulationStatEntry 4 }

## dot3OmpEmulationOnuPonCastLLID OBJECT-TYPE

SYNTAX Counter64

UNITS "frames"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"A count of frames received that contain a valid SLD field, as defined in IEEE Std 802.3, 65.1.3.3.1, pass the CRC-8 check, as defined in IEEE Std 802.3, 65.1.3.3.3, and meet the rules of acceptance for an ONU defined in IEEE Std 802.3, 65.1.3.3.2.

This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. At the OLT, the value should be zero.

Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the

```

        ifCounterDiscontinuityTime object of the Interfaces Group MIB
        module."
REFERENCE   "IEEE Std 802.3, 30.3.7.1.6."
 ::= { dot3OmpEmulationStatEntry 5}

dot3OmpEmulationOltPonCastLLID OBJECT-TYPE
SYNTAX Counter64
UNITS      "frames"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "A count of frames received that contain a valid SLD
    field, as defined in IEEE Std 802.3, 65.1.3.3.1,
    pass the CRC-8 check, as defined in IEEE Std 802.3,
    65.1.3.3.3, and meet the rules of acceptance for an
    OLT defined in IEEE Std 802.3, 65.1.3.3.2.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
    At the ONU, the value should be zero.
    Discontinuities of this counter can occur at
    re-initialization of the management system and at other
    times, as indicated by the value of the
    ifCounterDiscontinuityTime object of the Interfaces Group MIB
    module."
REFERENCE   "IEEE Std 802.3, 30.3.7.1.7."
 ::= { dot3OmpEmulationStatEntry 6}

dot3OmpEmulationBroadcastBitNotOnuLlid OBJECT-TYPE
SYNTAX Counter64
UNITS      "frames"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "A count of frames received that contain a valid SLD
    field, as defined in IEEE Std 802.3,
    65.1.3.3.1, pass the CRC-8 check, as defined in
    IEEE Std 802.3, 65.1.3.3.3, and contain the broadcast
    bit in the LLID and not the ONU's LLID (frame accepted)
    as defined in IEEE Std 802.3, Clause 65.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
    At the OLT, the value should be zero.
    Discontinuities of this counter can occur at
    re-initialization of the management system and at other
    times, as indicated by the value of the
    ifCounterDiscontinuityTime object of the Interfaces Group MIB
    module."
 ::= { dot3OmpEmulationStatEntry 7}

dot3OmpEmulationOnuLLIDNotBroadcast OBJECT-TYPE
SYNTAX Counter64
UNITS      "frames"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "A count of frames received that contain a valid SLD
    field, as defined in IEEE Std 802.3,
    65.1.3.3.1, pass the CRC-8 check, as defined in
    IEEE Std 802.3, 65.1.3.3.3, and contain the ONU's LLID

```

```

as defined in IEEE Std 802.3, Clause 65.
This object is applicable for an OLT and an ONU. At the
OLT, it has a distinct value for each virtual interface.
At the OLT, the value should be zero.
Discontinuities of this counter can occur at
re-initialization of the management system and at other
times, as indicated by the value of the
ifCounterDiscontinuityTime object of the Interfaces Group MIB
module."
 ::= { dot3OmpEmulationStatEntry 8 }

dot3OmpEmulationBroadcastBitPlusOnuLlid OBJECT-TYPE
    SYNTAX Counter64
    UNITS "frames"
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "A count of frames received that contain a valid SLD
        field, as defined in IEEE Std 802.3,
        65.1.3.3.1, pass the CRC-8 check, as defined in
        IEEE Std 802.3, 65.1.3.3.3, and contain the broadcast
        bit in the LLID and match the ONU's LLID (frame
        reflected) as defined in IEEE Std 802.3, Clause 65.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface.
        At the OLT, the value should be zero.
        Discontinuities of this counter can occur at
        re-initialization of the management system and at other
        times, as indicated by the value of the
        ifCounterDiscontinuityTime object of the Interfaces Group MIB
        module."
    ::= { dot3OmpEmulationStatEntry 9 }

dot3OmpEmulationNotBroadcastBitNotOnuLlid OBJECT-TYPE
    SYNTAX Counter64
    UNITS "frames"
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "A count of frames received that contain a valid SLD
        field, as defined in IEEE Std 802.3,
        65.1.3.3.1, pass the CRC-8 check, as defined in
        IEEE Std 802.3, 65.1.3.3.3, and do not contain
        the ONU's LLID as defined in IEEE Std 802.3, Clause 65.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface.
        At the OLT, the value should be zero.
        Discontinuities of this counter can occur at
        re-initialization of the management system and at other
        times, as indicated by the value of the
        ifCounterDiscontinuityTime object of the Interfaces Group MIB
        module."
    ::= { dot3OmpEmulationStatEntry 10 }

-- FEC managed object definitions (30.5.1)

dot3EponFecObjects OBJECT IDENTIFIER ::= {dot3EponObjects 3 }

dot3EponFecTable OBJECT-TYPE

```

SYNTAX SEQUENCE OF Dot3EponFecEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table of dot3 EPON FEC management objects.

The entries in the table are control and status objects and statistic counters for the FEC layer.

Each object has a row for every virtual link denoted by the corresponding ifIndex.

The LLID field, as defined in the IEEE Std 802.3, is a 2-byte register (15-bit field and a broadcast bit) limiting the number of virtual links to 32768. Typically the number of expected virtual links in a PON is like the number of ONUs, which is 32-64, plus an additional entry for broadcast LLID."

::= { dot3EponFecObjects 1 }

dot3EponFecEntry OBJECT-TYPE

SYNTAX Dot3EponFecEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in the dot3 EPON FEC table.

Rows exist for an OLT interface and an ONU interface.

A row in the table is denoted by the ifIndex of the link and it is created when the ifIndex is created.

The rows in the table for an ONU interface are created at system initialization.

The row in the table corresponding to the OLT ifIndex and the row corresponding to the broadcast virtual link are created at system initialization.

A row in the table corresponding to the ifIndex of a virtual links is created when a virtual link is established (ONU registers) and deleted when the virtual link is deleted (ONU deregisters)."

INDEX { ifIndex}

::= { dot3EponFecTable 1 }

Dot3EponFecEntry ::=

SEQUENCE {

dot3EponFecPCSCodingViolation Counter64,

dot3EponFecAbility INTEGER,

dot3EponFecMode INTEGER,

dot3EponFecCorrectedBlocks Counter64,

dot3EponFecUncorrectableBlocks Counter64,

dot3EponFecBufferHeadCodingViolation Counter64

}

dot3EponFecPCSCodingViolation OBJECT-TYPE

SYNTAX Counter64

UNITS "octets"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"For a 100 Mb/s operation, it is a count of the number of times an invalid code-group is received, other than the /H/ code-group. For a 1000 Mb/s operation, it is a count of the number of times an invalid codegroup is received, other than the /V/ code-group. /H/ denotes a special

4b5b codeword of the IEEE Std 802.3 Clause 24 100 Mb/s PCS layer, and /V/ denotes a special 8b10b codeword of the IEEE Std 802.3 Clause 36 1000 Mb/s PCS layer.

This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

REFERENCE "IEEE Std 802.3, 30.5.1.1.12."  
 ::= { dot3EponFecEntry 1 }

dot3EponFecAbility OBJECT-TYPE

SYNTAX INTEGER {  
     unknown(1),  
     supported(2),  
     unsupported(3)  
 }

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"An object that indicates the support of operation of the optional FEC sublayer of the 1000BASE-PX PHY specified in IEEE Std 802.3, 65.2.

unknown(1) value is assigned in the initialization, for non FEC support state or type not yet known. unsupported(3) value is assigned when the sublayer is not supported. supported(2) value is assigned when the sublayer is supported.

This object is applicable for an OLT, with the same value for all virtual interfaces, and for an ONU. The FEC counters will have a zero value when the interface is not supporting FEC.

The counters:

dot3EponFecPCSCodingViolation - not affected by FEC ability.

dot3EponFecCorrectedBlocks - has a zero value when dot3EponFecAbility is unknown(1) and unsupported(3).

dot3EponFecUncorrectableBlocks - has a zero value when dot3EponFecAbility is unknown(1) and unsupported(3).

dot3EponFecBufferHeadCodingViolation - has a zero value when dot3EponFecAbility is unknown(1) and unsupported(3)."

REFERENCE "IEEE Std 802.3, 30.5.1.1.13."  
 ::= { dot3EponFecEntry 2 }

dot3EponFecMode OBJECT-TYPE

SYNTAX INTEGER {  
     unknown(1),  
     disabled(2),  
     enabled(3)  
 }

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"An object that defines the mode of operation of the optional FEC sublayer of the 1000BASE-PX PHY, specified in IEEE Std 802.3, 65.2, and reflects its state.

A GET operation returns the current mode of operation of the PHY. A SET operation changes the mode of operation of the PHY to the indicated value.

unknown(1) value is assigned in the initialization for non FEC support state or type not yet known.

disabled(2) value is assigned when the FEC sublayer is operating in disabled mode.

enabled(3) value is assigned when the FEC sublayer is operating in FEC mode.

The write operation is not restricted in this document and can be done at any time. Changing dot3EponFecMode state can lead to disabling the Forward Error Correction on the respective interface, which can lead to a degradation of the optical link, and therefore may lead to an interruption of service for the users connected to the respective EPON interface.

This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface.

The counting of

the FEC counters will stop when the FEC of the interface is disabled.

The counters:

dot3EponFecPCSCodingViolation - not affected by FEC mode.

dot3EponFecCorrectedBlocks - stops counting when Rx\_FEC is not enabled. (unknown(1) and disabled(2)).

dot3EponFecUncorrectableBlocks - stops counting when Rx\_FEC is not enabled (unknown(1) and disabled(2)).

dot3EponFecBufferHeadCodingViolation - stops counting when Rx\_FEC is not enabled (unknown(1) and disabled(2)).

The object:

dot3EponFecAbility - indicates the FEC ability and is not affected by the dot3EponFecMode object."

REFERENCE "IEEE Std 802.3, 30.5.1.1.14."

DEFVAL { unknown }

::= { dot3EponFecEntry 3 }

#### dot3EponFecCorrectedBlocks OBJECT-TYPE

SYNTAX Counter64

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"For 10PASS-TS, 2BASE-TL, and 1000BASE-PX PHYs, it is a count of corrected FEC blocks. This counter will not increment for other PHY Types. Increment the counter by one for each received block that is corrected by the FEC function in the PHY.

This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface.

Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

REFERENCE "IEEE Std 802.3, 30.5.1.1.15."

::= { dot3EponFecEntry 4 }

#### dot3EponFecUncorrectableBlocks OBJECT-TYPE

```

SYNTAX Counter64
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "For 10PASS-TS, 2BASE-TL, and 1000BASE-PX PHYs, it is a
    count of uncorrectable FEC blocks. This counter will not
    increment for other PHY Types. Increment the counter by
    one for each FEC block that is determined to be
    uncorrectable by the FEC function in the PHY.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
    Discontinuities of this counter can occur at
    re-initialization of the management system and at other
    times, as indicated by the value of the
    ifCounterDiscontinuityTime object of the Interfaces Group MIB
    module."
REFERENCE "IEEE Std 802.3, 30.5.1.1.16."
 ::= { dot3EponFecEntry 5}

```

```
dot3EponFecBufferHeadCodingViolation OBJECT-TYPE
```

```

SYNTAX Counter64
UNITS "octets"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "For a 1000 Mb/s operation, it is a count of the number of
    invalid code-group received directly from the link. The
    value has a meaning only in 1000 Mb/s mode and it is
    zero otherwise.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface.
    Discontinuities of this counter can occur at
    re-initialization of the management system and at other
    times, as indicated by the value of the
    ifCounterDiscontinuityTime object of the Interfaces Group MIB
    module."
 ::= { dot3EponFecEntry 6}

```

```
-- ExtendedPackage managed object definitions
```

```
dot3ExtPkgObjects OBJECT IDENTIFIER ::= {dot3EponObjects 4}
```

```
dot3ExtPkgControlObjects OBJECT IDENTIFIER ::= { dot3ExtPkgObjects 1}
```

```
dot3ExtPkgControlTable OBJECT-TYPE
```

```

SYNTAX SEQUENCE OF Dot3ExtPkgControlEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "A table of Extended package Control management
    objects. Entries in the table are control and status
    indication objects of an EPON interface, which are
    gathered in an extended package as an addition to the
    objects based on the IEEE Std 802.3, Clause 30, attributes.
    Each object has a row for every virtual link denoted by
    the corresponding ifIndex.
    The LLID field, as defined in the IEEE Std 802.3, is a 2-byte
    register (15-bit field and a broadcast bit) limiting the
    number of virtual links to 32768. Typically the number

```

```

        of expected virtual links in a PON is like the number of
        ONUs, which is 32-64, plus an additional entry for
        broadcast LLID."
 ::= { dot3ExtPkgControlObjects 1 }

dot3ExtPkgControlEntry OBJECT-TYPE
    SYNTAX Dot3ExtPkgControlEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "An entry in the Extended package Control table.
        Rows exist for an OLT interface and an ONU interface.
        A row in the table is denoted by the ifIndex of the link
        and it is created when the ifIndex is created.
        The rows in the table for an ONU interface are created
        at system initialization.
        The row in the table corresponding to the OLT ifIndex
        and the row corresponding to the broadcast virtual link
        are created at system initialization.
        A row in the table corresponding to the ifIndex of a
        virtual links is created when a virtual link is
        established (ONU registers) and deleted when the virtual
        link is deleted (ONU deregisters)."
```

```

    INDEX { ifIndex }
 ::= { dot3ExtPkgControlTable 1 }

Dot3ExtPkgControlEntry ::=
    SEQUENCE {
        dot3ExtPkgObjectReset                INTEGER,
        dot3ExtPkgObjectPowerDown            TruthValue,
        dot3ExtPkgObjectNumberOfLLIDs        Unsigned32,
        dot3ExtPkgObjectFecEnabled           INTEGER,
        dot3ExtPkgObjectReportMaximumNumQueues Unsigned32,
        dot3ExtPkgObjectRegisterAction       INTEGER
    }

dot3ExtPkgObjectReset OBJECT-TYPE
    SYNTAX INTEGER {
        running(1),
        reset(2)
    }
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "This object is used to reset the EPON interface. The
        interface may be unavailable while the reset occurs and
        data may be lost.
        Setting this object to running(1) will cause the
        interface to enter into running mode. Setting this
        object to reset(2) will cause the interface to go into
        reset mode. When getting running(1), the interface is in
        running mode. When getting reset(2), the interface is in
        reset mode.
        The write operation is not restricted in this document
        and can be done at any time. Changing
        dot3ExtPkgObjectReset state can lead to a reset of the
        respective interface, leading to an interruption of
        service for the users connected to the respective EPON
        interface."
```

This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. A reset for a specific virtual interface resets only this virtual interface and not the physical interface. Thus, a virtual link that is malfunctioning can be reset without affecting the operation of other virtual interfaces.

The reset can cause Discontinuities in the values of the counters of the interface, similar to re-initialization of the management system. Discontinuity should be indicated by the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

```
DEFVAL { running }
 ::= { dot3ExtPkgControlEntry 1 }
```

dot3ExtPkgObjectPowerDown OBJECT-TYPE

```
SYNTAX TruthValue
MAX-ACCESS read-write
STATUS current
DESCRIPTION
```

"This object is used to power down the EPON interface. The interface may be unavailable while the power down occurs and data may be lost. Setting this object to true(1) will cause the interface to enter into power down mode. Setting this object to false(2) will cause the interface to go out of power down mode. When getting true(1), the interface is in power down mode. When getting false(2), the interface is not in power down mode.

The write operation is not restricted in this document and can be done at any time. Changing dot3ExtPkgObjectPowerDown state can lead to a power down of the respective interface, leading to an interruption of service of the users connected to the respective EPON interface.

This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. A power down/up of a specific virtual interface affects only the virtual interface and not the physical interface. Hence a virtual link, which needs a certain handling, can be powered down and then powered up without disrupting the operation of other virtual interfaces.

The object is relevant when the admin state of the interface is active as set by the dot3MpcpAdminState."

```
DEFVAL { false }
 ::= { dot3ExtPkgControlEntry 2 }
```

dot3ExtPkgObjectNumberOfLLIDs OBJECT-TYPE

```
SYNTAX Unsigned32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
```

"A read only object that indicates the number of registered LLIDs. The initialization value is 0. This object is applicable for an OLT with the same value for all virtual interfaces and for an ONU. The LLID field, as defined in the IEEE Std 802.3, is a 2-byte register (15-bit field and a broadcast bit) limiting the number of virtual links to 32768. Typically the number

of expected virtual links in a PON is like the number of ONUs, which is 32-64, plus an additional entry for broadcast LLID. At the ONU the number of LLIDs for an interface is one."

```
::= { dot3ExtPkgControlEntry 3 }
```

dot3ExtPkgObjectFecEnabled OBJECT-TYPE

```
SYNTAX INTEGER {
    noFecEnabled(1),
    fecTxEnabled(2),
    fecRxEnabled(3),
    fecTxRxEnabled(4)
}
```

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"An object defining the FEC mode of operation of the interface, and indicating its state. The modes defined in this object are extensions to the FEC modes defined in the dot3EponFecMode object.

When noFECEnabled(1), the interface does not enable FEC mode.

When fecTxEnabled(2), the interface enables the FEC transmit mode.

When fecRxEnabled(3), the interface enables the FEC receive mode.

When fecTxRxEnabled(4), the interface enables the FEC transmit and receive mode.

This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface. The FEC counters are referring to the receive path. The FEC counters will stop when the FEC receive mode of the interface is disabled, as defined by fecRxEnabled(3) and fecTxRxEnabled(4) values.

The counters:

dot3EponFecPCSCodingViolation - not affected by FEC mode.

dot3EponFecCorrectedBlocks - stops counting when Rx\_FEC is not enabled (noFecEnabled(1) and fecTxEnabled(2)).

dot3EponFecUncorrectableBlocks - stops counting when Rx\_FEC is not enabled (noFecEnabled(1) and fecTxEnabled(2)).

dot3EponFecBufferHeadCodingViolation - stops counting when Rx\_FEC is not enabled (noFecEnabled(1) and fecTxEnabled(2)).

The objects:

dot3EponFecAbility - indicates the FEC ability and is not affected by the FEC mode.

dot3EponFecMode - indicates the FEC mode for combined RX and TX.

The write operation is not restricted in this document and can be done at any time. Changing dot3ExtPkgObjectFecEnabled state can lead to disabling the Forward Error Correction on the respective interface, which can lead to a degradation of the optical link, and therefore may lead to an interruption of service for the users connected to the respective EPON interface."

```
DEFVAL { noFecEnabled }
```

```

 ::= { dot3ExtPkgControlEntry 4 }

dot3ExtPkgObjectReportMaximumNumQueues OBJECT-TYPE
    SYNTAX  Unsigned32 (0..7)
    MAX-ACCESS  read-only
    STATUS  current
    DESCRIPTION
        "An object, that defines the maximal number of queues in
        the REPORT message as defined in IEEE Std 802.3, Clause 64. For
        further information please see the description of the
        queue table.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface."
    DEFVAL { 0 }
 ::= { dot3ExtPkgControlEntry 5 }

dot3ExtPkgObjectRegisterAction OBJECT-TYPE
    SYNTAX  INTEGER {
        none(1),
        register(2),
        deregister(3),
        reregister(4)
    }
    MAX-ACCESS  read-write
    STATUS  current
    DESCRIPTION
        "An object configuring the registration state of an
        interface, and indicating its registration state.
        Write operation changes the registration state to its new
        value.
        Read operation returns the value of the state.
        The registration state is reflected in this object and in
        the dot3MpcpRegistrationState object.
        none(1) indicates an unknown state,
        register(2) indicates a registered LLID,
        deregister(3) indicates a deregistered LLID,
        reregister(4) indicates an LLID that is reregistering.
        The following list describes the operation of the
        interface, as specified in the IEEE Std 802.3, when a write
        operation is setting a value.
        none(1) - not doing any action.
        register(2) - registering an LLID that has been requested
        for registration (The LLID is in registering mode.
            dot3MpcpRegistrationState - registering(2) ).
        deregister(3) - deregisters an LLID that is registered
            (dot3MpcpRegistrationState - registered(3) ).
        reregister(4) - reregister an LLID that is registered
            (dot3MpcpRegistrationState - registered(3) ).
        The behavior of an ONU and OLT interfaces, at each one
        of the detailed operation at each state, is described in
        the registration state machine of figure 64-22,
        IEEE Std 802.3.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface.
        The write operation is not restricted in this document
        and can be done at any time. Changing
        dot3ExtPkgObjectRegisterAction state can lead to a change
        in the registration state of the respective interface
        leading to a deregistration and an interruption of

```

```

        service of the users connected to the respective EPON
        interface."
    DEFVAL { none }
    ::= { dot3ExtPkgControlEntry 6 }

```

dot3ExtPkgQueueTable OBJECT-TYPE

SYNTAX SEQUENCE OF Dot3ExtPkgQueueEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table of the extended package objects for queue management. The IEEE Std 802.3 MPCP defines a report message of the occupancy of the transmit queues for the feedback BW request from the ONUs. These queues serve the uplink transmission of the ONU and data is gathered there until the ONU is granted for transmission. The management table of the queues is added here mainly to control the reporting and to gather some statistics of their operation. This table is not duplicating existing management objects of bridging queues, specified in IEEE Std 802.1D, since the existence of a dedicated transmit queuing mechanism is implied in the IEEE Std 802.3, and the ONU may be a device that is not a bridge with embedded bridging queues. The format of the REPORT message, as specified in IEEE Std 802.3, is presented below:

```

+-----+
|           Destination Address           |
+-----+
|           Source Address               |
+-----+
|           Length/Type                  |
+-----+
|           OpCode                       |
+-----+
|           TimeStamp                    |
+-----+
|           Number of queue Sets         |
+-----+
|           Report bitmap                 |
+-----+
|           Queue 0 report                |
+-----+
|           Queue 1 report                |
+-----+
|           Queue 2 report                |
+-----+
|           Queue 3 report                |
+-----+
|           Queue 4 report                |
+-----+
|           Queue 5 report                |
+-----+
|           Queue 6 report                |
+-----+
|           Queue 7 report                |
+-----+
|           Pad/reserved                  |
+-----+

```

/|\  
repeated for  
every  
queue\_set  
\|/

```

|          FCS          |
+-----+

```

The 'Queue report' field reports the occupancy of each uplink transmission queue.

The number of queue sets defines the number of the reported sets, as would be explained in the description of the dot3ExtPkgQueueSetsTable table. For each set the report bitmap defines which queue is present in the report, meaning that although the MPCP REPORT message can report up to 8 queues in a REPORT message, the actual number is flexible. The Queue table has a variable size that is limited by the dot3ExtPkgObjectReportMaximumNumQueues object, as an ONU can have fewer queues to report.

The entries in the table are control and status indication objects for managing the queues of an EPON interface that are gathered in an extended package as an addition to the objects that are based on the IEEE Std 802.3 attributes.

Each object has a row for every virtual link and for every queue in the report.

The LLID field, as defined in the IEEE Std 802.3, is a 2-byte register (15-bit field and a broadcast bit) limiting the number of virtual links to 32768. Typically the number of expected virtual links in a PON is like the number of ONUs, which is 32-64, plus an additional entry for broadcast LLID.

The number of queues is between 0 and 7 and limited by dot3ExtPkgObjectReportMaximumNumQueues."

```
 ::= { dot3ExtPkgControlObjects 2 }
```

dot3ExtPkgQueueEntry OBJECT-TYPE

SYNTAX Dot3ExtPkgQueueEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in the Extended package Queue table. At the OLT, the rows exist for each ifIndex and dot3QueueIndex. At the ONU, rows exist for the single ifIndex for each dot3QueueIndex.

Rows in the table are created when the ifIndex of the link is created. A set of rows per queue are added for each ifIndex, denoted by the dot3QueueIndex.

A set of rows per queue in the table, for an ONU interface, are created at the system initialization.

A set of rows per queue in the table, corresponding to the OLT ifIndex and a set of rows per queue corresponding to the broadcast virtual link, are created at the system initialization.

A set of rows per queue in the table, corresponding to the ifIndex of a virtual link, are created when the virtual link is established (ONU registers), and deleted when the virtual link is deleted (ONU deregisters)."

```
INDEX { ifIndex, dot3QueueIndex }
```

```
 ::= { dot3ExtPkgQueueTable 1 }
```

Dot3ExtPkgQueueEntry ::=

```
SEQUENCE {
```

```

dot3QueueIndex                               Unsigned32,
dot3ExtPkgObjectReportNumThreshold           Unsigned32,
dot3ExtPkgObjectReportMaximumNumThreshold   Unsigned32,
dot3ExtPkgStatTxFramesQueue                  Counter64,
dot3ExtPkgStatRxFramesQueue                  Counter64,
dot3ExtPkgStatDroppedFramesQueue             Counter64
}

dot3QueueIndex OBJECT-TYPE
    SYNTAX      Unsigned32 (0..7)
    MAX-ACCESS   not-accessible
    STATUS      current
    DESCRIPTION
        "An object that identifies an index for the queue table
        reflecting the queue index of the queues that are
        reported in the MPCP REPORT message as defined in
        IEEE Std 802.3, Clause 64.
        The number of queues is between 0 and 7, and limited by
        dot3ExtPkgObjectReportMaximumNumQueues."
    ::= { dot3ExtPkgQueueEntry 1 }

dot3ExtPkgObjectReportNumThreshold OBJECT-TYPE
    SYNTAX      Unsigned32 (0..7)
    MAX-ACCESS   read-write
    STATUS      current
    DESCRIPTION
        "An object that defines the number of thresholds for each
        queue in the REPORT message as defined in IEEE Std 802.3,
        Clause 64.
        Each queue_set reporting will provide information on the
        queue occupancy of frames below the matching Threshold.
        Read operation reflects the number of thresholds.
        Write operation sets the number of thresholds for each
        queue.
        The write operation is not restricted in this document
        and can be done at any time. Value cannot exceed the
        maximal value defined by the
        dot3ExtPkgObjectReportMaximumNumThreshold object.
        Changing dot3ExtPkgObjectReportNumThreshold can lead to
        a change in the reporting of the ONU interface and
        therefore to a change in the bandwidth allocation of the
        respective interface. This change may lead a degradation
        or an interruption of service of the users connected to
        the respective EPON interface.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface
        and for each queue. At the ONU, it has a distinct value
        for each queue."
    DEFVAL { 0 }
    ::= { dot3ExtPkgQueueEntry 2 }

dot3ExtPkgObjectReportMaximumNumThreshold OBJECT-TYPE
    SYNTAX      Unsigned32 (0..7)
    MAX-ACCESS   read-only
    STATUS      current
    DESCRIPTION
        "An object, that defines the maximal number of thresholds
        for each queue in the REPORT message as defined in
        IEEE Std 802.3, Clause 64. Each queue_set reporting will

```

provide information on the queue occupancy of frames below the matching Threshold.  
 This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface and for each queue. At the ONU, it has a distinct value for each queue."

```
DEFVAL { 0 }
 ::= { dot3ExtPkgQueueEntry 3 }
```

```
dot3ExtPkgStatTxFramesQueue OBJECT-TYPE
```

```
SYNTAX Counter64
```

```
UNITS "frames"
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

"A count of the number of times a frame transmission occurs from the corresponding 'Queue'. Increment the counter by one for each frame transmitted, which is an output of the 'Queue'. The 'Queue' marking matches the REPORT MPCP message Queue field as defined in IEEE Std 802.3, Clause 64. This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface and for each queue. At the ONU, it has a distinct value for each queue.  
 At the OLT the value should be zero. Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

```
 ::= { dot3ExtPkgQueueEntry 4 }
```

```
dot3ExtPkgStatRxFramesQueue OBJECT-TYPE
```

```
SYNTAX Counter64
```

```
UNITS "frames"
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

"A count of the number of times a frame reception occurs from the corresponding 'Queue'. Increment the counter by one for each frame received, which is an input to the corresponding 'Queue'. The 'Queue' marking matches the REPORT MPCP message Queue field as defined in IEEE Std 802.3, Clause 64. This object is applicable for an OLT and an ONU. At the OLT, it has a distinct value for each virtual interface and for each queue. At the ONU, it has a distinct value for each queue.  
 Discontinuities of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of the ifCounterDiscontinuityTime object of the Interfaces Group MIB module."

```
 ::= { dot3ExtPkgQueueEntry 5 }
```

```
dot3ExtPkgStatDroppedFramesQueue OBJECT-TYPE
```

```
SYNTAX Counter64
```

```
UNITS "frames"
```

```


MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "A count of the number of times a frame drop
    occurs from the corresponding 'Queue'.
    Increment the counter by one for each frame dropped
    from the corresponding 'Queue'.
    The 'Queue' marking matches the REPORT MPCP message
    Queue field as defined in IEEE Std 802.3, Clause 64.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface
    and for each queue. At the ONU, it has a distinct value
    for each queue.
    At the OLT, the value should be zero.
    Discontinuities of this counter can occur at
    re-initialization of the management system and at other
    times, as indicated by the value of the
    ifCounterDiscontinuityTime object of the Interfaces Group MIB
    module."
 ::= { dot3ExtPkgQueueEntry 6}

```

```

dot3ExtPkgQueueSetsTable OBJECT-TYPE
    SYNTAX SEQUENCE OF Dot3ExtPkgQueueSetsEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "A table of Extended package objects used for the
        management of the queue_sets. Entries are control and
        status indication objects of an EPON interface, which
        are gathered in an extended package as an addition to
        the objects based on the IEEE Std 802.3 attributes. The
        objects in this table are specific for the queue_sets,
        which are reported in the MPCP REPORT message as defined
        in IEEE Std 802.3, Clause 64.
        The IEEE Std 802.3 MPCP defines a report message of the
        occupancy of the transmit queues for the feedback BW
        request from the ONUs. These queues serve the uplink
        transmission of the ONU and data is gathered there until
        the ONU is granted for transmission.
        The management table of the queues_sets is added here
        mainly to control the reporting and to gather some
        statistics of their operation. This table is not
        duplicating existing management objects of bridging
        queues, specified in IEEE Std 802.1D, since the existence of a
        dedicated transmit queuing mechanism is implied in the
        IEEE Std 802.3, and the ONU may be a device that is not a
        bridge with embedded bridging queues.
        The format of the REPORT message, as specified
        in IEEE Std 802.3, is presented below:
        +-----+
        |          Destination Address          |
        +-----+
        |          Source Address              |
        +-----+
        |          Length/Type                 |
        +-----+
        |          OpCode                       |
        +-----+
        |          TimeStamp                    |
        +-----+

```

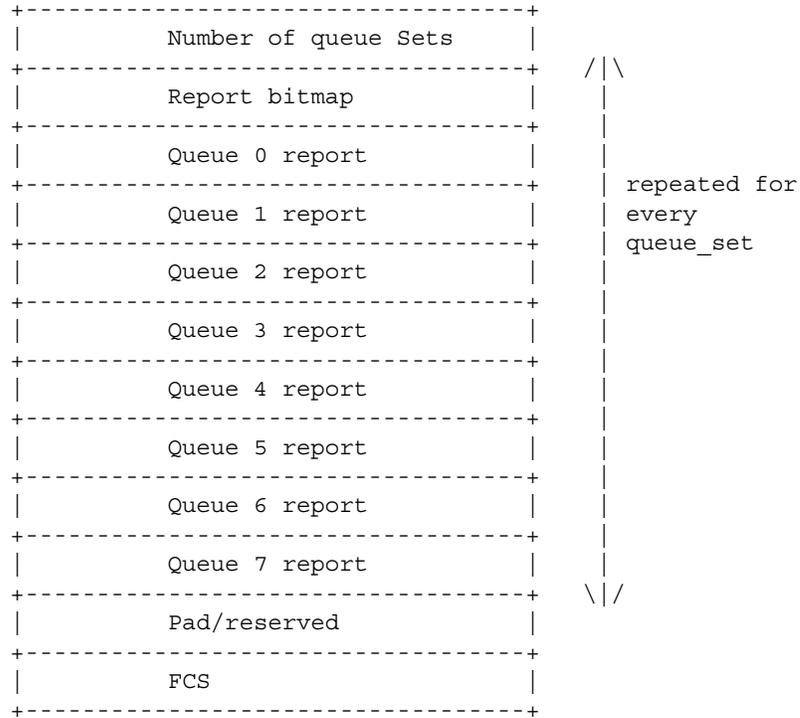

As can be seen from the message format, the ONU interface reports of the status of up to 8 queues and it can report in a single MPCP REPORT message of a few sets of queues.

The number of queue\_sets defines the number of the reported sets, and it can reach a value of up to 8. It means that an ONU can hold a variable number of sets between 0 and 7.

The dot3ExtPkgQueueSetsTable table has a variable queue\_set size that is limited by the dot3ExtPkgObjectReportMaximumNumThreshold object as an ONU can have fewer queue\_sets to report.

The 'Queue report' field reports the occupancy of each uplink transmission queue. The queue\_sets can be used to report the occupancy of the queues in a few levels as to allow granting, in an accurate manner, of only part of the data available in the queues. A Threshold is defined for each queue\_set to define the level of the queue that is counted for the report of the occupancy. The threshold is reflected in the queue\_set table by the dot3ExtPkgObjectReportThreshold object.

For each queue set, the report bitmap defines which queues are present in the report, meaning that although the MPCP REPORT message can report of up to 8 queues in a REPORT message, the actual number is flexible.

The dot3ExtPkgQueueSetsTable table has a variable queue size that is limited by the dot3ExtPkgObjectReportMaximumNumQueues object as an ONU can have fewer queues to report.

Each object has a row for every virtual link, for each queue in the report and for each queue\_set in the queue. The LLID field, as defined in the IEEE Std 802.3, is a 2-byte

register (15-bit field and a broadcast bit) limiting the number of virtual links to 32768. Typically the number of expected virtual links in a PON is like the number of ONUs, which is 32-64, plus an additional entry for broadcast LLID.

The number of queues is between 0 and 7 and limited by dot3ExtPkgObjectReportMaximumNumQueues.

The number of queues\_sets is between 0 and 7 and limited by dot3ExtPkgObjectReportMaximumNumThreshold."

```
::= { dot3ExtPkgControlObjects 3 }
```

dot3ExtPkgQueueSetsEntry OBJECT-TYPE

SYNTAX Dot3ExtPkgQueueSetsEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in the Extended package queue\_set table. At the OLT, the rows exist for each ifIndex, dot3QueueSetQueueIndex and dot3QueueSetIndex. At the ONU, rows exist for the single ifIndex, for each dot3QueueSetQueueIndex and dot3QueueSetIndex. Rows in the table are created when the ifIndex of the link is created. A set of rows per queue and per queue\_set are added for each ifIndex, denoted by dot3QueueSetIndex and dot3QueueSetQueueIndex. A set of rows per queue and per queue\_set in the table, for an ONU interface are created at system initialization. A set of rows per queue and per queue\_Set in the table, corresponding to the OLT ifIndex and a set of rows per queue and per queue\_set, corresponding to the broadcast virtual link, are created at system initialization. A set of rows per queue and per queue\_set in the table, corresponding to the ifIndex of a virtual link are created when the virtual link is established (ONU registers) and deleted when the virtual link is deleted (ONU deregisters)."

INDEX { ifIndex,

dot3QueueSetQueueIndex,dot3QueueSetIndex}

```
::= { dot3ExtPkgQueueSetsTable 1 }
```

Dot3ExtPkgQueueSetsEntry ::=

SEQUENCE {

dot3QueueSetQueueIndex

Unsigned32,

dot3QueueSetIndex

Unsigned32,

dot3ExtPkgObjectReportThreshold

Unsigned32

}

dot3QueueSetQueueIndex OBJECT-TYPE

SYNTAX Unsigned32 (0..7)

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An object that identifies the queue index for the dot3ExtPkgQueueSetsTable table. The queues are reported in the MPCP REPORT message as defined in IEEE Std 802.3, Clause 64.

The number of queues is between 0 and 7, and limited by dot3ExtPkgObjectReportMaximumNumQueues.

```

        Value corresponds to the dot3QueueIndex of the queue
        table."
 ::= { dot3ExtPkgQueueSetsEntry 1 }

dot3QueueSetIndex OBJECT-TYPE
    SYNTAX      Unsigned32 (0..7)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An object that identifies the queue_set index for the
        dot3ExtPkgQueueSetsTable table. The queues are reported
        in the MPCP REPORT message as defined in IEEE Std 802.3,
        Clause 64.
        The number of queues_sets is between 0 and 7, and
        limited by dot3ExtPkgObjectReportMaximumNumThreshold."
 ::= { dot3ExtPkgQueueSetsEntry 2 }

dot3ExtPkgObjectReportThreshold OBJECT-TYPE
    SYNTAX      Unsigned32
    UNITS       "TQ (16 ns)"
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "An object that defines the value of a threshold report
        for each queue_set in the REPORT message as defined in
        IEEE Std 802.3, Clause 64. The number of sets for each queue
        is dot3ExtPkgObjectReportNumThreshold.
        In the REPORT message, each queue_set reporting will
        provide information on the occupancy of the queues for
        frames below the matching Threshold.
        The value returned shall be in Time quanta (TQ), which
        is 16 ns or 2 octets increments.
        Read operation provides the threshold value. Write
        operation sets the value of the threshold.
        The write operation is not restricted in this document
        and can be done at any time. Changing
        dot3ExtPkgObjectReportThreshold can lead to a change in
        the reporting of the ONU interface and therefore to a
        change in the bandwidth allocation of the respective
        interface. This change may lead a degradation or an
        interruption of service for the users connected to the
        respective EPON interface.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface,
        for each queue and for each queue_set. At the ONU, it has
        a distinct value for each queue and for each queue_set."
    DEFVAL { 0 }
 ::= { dot3ExtPkgQueueSetsEntry 3 }

--Optical Interface status tables

dot3ExtPkgOptIfTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Dot3ExtPkgOptIfEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table defines the control and status indication
        objects for the optical interface of the EPON interface.
        Each object has a row for every virtual link denoted by

```

the corresponding ifIndex.

The LLID field, as defined in the IEEE Std 802.3, is a 2-byte register (15-bit field and a broadcast bit) limiting the number of virtual links to 32768. Typically the number of expected virtual links in a PON is like the number of ONUs, which is 32-64, plus an additional entry for broadcast LLID.

Although the optical interface is a physical interface, there is a row in the table for each virtual interface. The reason for having a separate row for each virtual link is that the OLT has a separate link for each one of the ONUs. For instance, ONUs could be in different distances with different link budgets and different receive powers, therefore having different power alarms. It is quite similar to a case of different physical interfaces."

```
::= { dot3ExtPkgControlObjects 5 }
```

dot3ExtPkgOptIfEntry OBJECT-TYPE

SYNTAX Dot3ExtPkgOptIfEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in the optical interface table of the EPON interface.

Rows exist for an OLT interface and an ONU interface.

A row in the table is denoted by the ifIndex of the link and it is created when the ifIndex is created.

The rows in the table for an ONU interface are created at system initialization.

The row in the table corresponding to the OLT ifIndex and the row corresponding to the broadcast virtual link are created at system initialization.

A row in the table corresponding to the ifIndex of a virtual links is created when a virtual link is established (ONU registers) and deleted when the virtual link is deleted (ONU deregisters)."

INDEX { ifIndex }

```
::= { dot3ExtPkgOptIfTable 1 }
```

Dot3ExtPkgOptIfEntry ::=

SEQUENCE {

dot3ExtPkgOptIfSuspectedFlag	TruthValue,
dot3ExtPkgOptIfInputPower	Integer32,
dot3ExtPkgOptIfLowInputPower	Integer32,
dot3ExtPkgOptIfHighInputPower	Integer32,
dot3ExtPkgOptIfLowerInputPowerThreshold	Integer32,
dot3ExtPkgOptIfUpperInputPowerThreshold	Integer32,
dot3ExtPkgOptIfOutputPower	Integer32,
dot3ExtPkgOptIfLowOutputPower	Integer32,
dot3ExtPkgOptIfHighOutputPower	Integer32,
dot3ExtPkgOptIfLowerOutputPowerThreshold	Integer32,
dot3ExtPkgOptIfUpperOutputPowerThreshold	Integer32,
dot3ExtPkgOptIfSignalDetect	TruthValue,
dot3ExtPkgOptIfTransmitAlarm	TruthValue,
dot3ExtPkgOptIfTransmitEnable	TruthValue

}

dot3ExtPkgOptIfSuspectedFlag OBJECT-TYPE

```

SYNTAX TruthValue
MAX-ACCESS read-only
STATUS current
DESCRIPTION
  "This object is a reliability indication.
   If true, the data in this entry may be unreliable.
   This object is applicable for an OLT and an ONU. At the
   OLT, it has a distinct value for each virtual interface."
 ::= { dot3ExtPkgOptIfEntry 1 }

```

```

dot3ExtPkgOptIfInputPower OBJECT-TYPE
  SYNTAX Integer32
  UNITS "0.1 dbm"
  MAX-ACCESS read-only
  STATUS current
  DESCRIPTION
    "The optical power monitored at the input.
     This object is applicable for an OLT and an ONU. At the
     OLT, it has a distinct value for each virtual interface."
 ::= { dot3ExtPkgOptIfEntry 2 }

```

```

dot3ExtPkgOptIfLowInputPower OBJECT-TYPE
  SYNTAX Integer32
  UNITS "0.1 dbm"
  MAX-ACCESS read-only
  STATUS current
  DESCRIPTION
    "The lowest optical power monitored at the input during the
     current 15-minute interval.
     This object is applicable for an OLT and an ONU. At the
     OLT, it has a distinct value for each virtual interface."
 ::= { dot3ExtPkgOptIfEntry 3 }

```

```

dot3ExtPkgOptIfHighInputPower OBJECT-TYPE
  SYNTAX Integer32
  UNITS "0.1 dbm"
  MAX-ACCESS read-only
  STATUS current
  DESCRIPTION
    "The highest optical power monitored at the input during the
     current 15-minute interval.
     This object is applicable for an OLT and an ONU. At the
     OLT, it has a distinct value for each virtual interface."
 ::= { dot3ExtPkgOptIfEntry 4 }

```

```

dot3ExtPkgOptIfLowerInputPowerThreshold OBJECT-TYPE
  SYNTAX Integer32
  UNITS "0.1 dbm"
  MAX-ACCESS read-write
  STATUS current
  DESCRIPTION
    "The lower limit threshold on input power. If
     dot3ExtPkgOptIfInputPower drops to this value or below,
     a Threshold Crossing Alert (TCA) should be sent.
     Reading will present the threshold value. Writing will
     set the value of the threshold.
     The write operation is not restricted in this document
     and can be done at any time. Changing
     dot3ExtPkgOptIfLowerInputPowerThreshold can lead to a Threshold
     Crossing Alert (TCA) being sent for the respective interface."

```

```

    This alert may be leading to an interruption of service for the
    users connected to the respective EPON interface, depending on
    the system action on such an alert.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface."
 ::= { dot3ExtPkgOptIfEntry 5 }

dot3ExtPkgOptIfUpperInputPowerThreshold OBJECT-TYPE
SYNTAX Integer32
UNITS "0.1 dbm"
MAX-ACCESS read-write
STATUS current
DESCRIPTION
    "The upper limit threshold on input power. If
    dot3ExtPkgOptIfInputPower reaches or exceeds this value,
    a Threshold Crossing Alert (TCA) should be sent.
    Reading will present the threshold value. Writing will
    set the value of the threshold.
    The write operation is not restricted in this document
    and can be done at any time. Changing
    dot3ExtPkgOptIfUpperInputPowerThreshold can lead to a Threshold
    Crossing Alert (TCA) being sent for the respective interface.
    This alert may be leading to an interruption of service for the
    users connected to the respective EPON interface, depending on
    the system action on such an alert.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface."
 ::= { dot3ExtPkgOptIfEntry 6 }

dot3ExtPkgOptIfOutputPower OBJECT-TYPE
SYNTAX Integer32
UNITS "0.1 dbm"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The optical power monitored at the output.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface."
 ::= { dot3ExtPkgOptIfEntry 7 }

dot3ExtPkgOptIfLowOutputPower OBJECT-TYPE
SYNTAX Integer32
UNITS "0.1 dbm"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The lowest optical power monitored at the output during the
    current 15-minute interval.
    This object is applicable for an OLT and an ONU. At the
    OLT, it has a distinct value for each virtual interface."
 ::= { dot3ExtPkgOptIfEntry 8 }

dot3ExtPkgOptIfHighOutputPower OBJECT-TYPE
SYNTAX Integer32
UNITS "0.1 dbm"
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The highest optical power monitored at the output during the

```

```

        current 15-minute interval.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface."
 ::= { dot3ExtPkgOptIfEntry 9 }

dot3ExtPkgOptIfLowerOutputPowerThreshold OBJECT-TYPE
    SYNTAX Integer32
    UNITS "0.1 dbm"
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "The lower limit threshold on output power. If
        dot3ExtPkgOptIfOutputPower drops to this value or below,
        a Threshold Crossing Alert (TCA) should be sent.
        Reading will present the threshold value. Writing will
        set the value of the threshold.
        The write operation is not restricted in this document
        and can be done at any time. Changing
        dot3ExtPkgOptIfLowerOutputPowerThreshold can lead to a Threshold
        Crossing Alert (TCA) being sent for the respective interface.
        This alert may be leading to an interruption of service for the
        users connected to the respective EPON interface, depending on
        the system action on such an alert.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface."
 ::= { dot3ExtPkgOptIfEntry 10 }

dot3ExtPkgOptIfUpperOutputPowerThreshold OBJECT-TYPE
    SYNTAX Integer32
    UNITS "0.1 dbm"
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "The upper limit threshold on output power. If
        dot3ExtPkgOptIfOutputPower reaches or exceeds this value,
        a Threshold Crossing Alert (TCA) should be sent.
        Reading will present the threshold value. Writing will
        set the value of the threshold.
        The write operation is not restricted in this document
        and can be done at any time. Changing
        dot3ExtPkgOptIfUpperOutputPowerThreshold can lead to a Threshold
        Crossing Alert (TCA) being sent for the respective interface.
        This alert may be leading to an interruption of service of the
        users connected to the respective EPON interface, depending on
        the system action on such an alert.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface."
 ::= { dot3ExtPkgOptIfEntry 11 }

dot3ExtPkgOptIfSignalDetect OBJECT-TYPE
    SYNTAX TruthValue
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "When getting true(1), there is a valid optical signal at
        the receive that is above the optical power level for
        signal detection. When getting false(2) the optical
        signal at the receive is below the optical power level
        for signal detection."

```

```

        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface."
    DEFVAL { false }
    ::= { dot3ExtPkgOptIfEntry 12 }

dot3ExtPkgOptIfTransmitAlarm OBJECT-TYPE
    SYNTAX TruthValue
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "When getting true(1) there is a non-valid optical signal
        at the transmit of the interface, either a higher level
        or lower level than expected. When getting false(2) the
        optical signal at the transmit is valid and in the
        required range.
        This object is applicable for an OLT and an ONU. At the
        OLT, it has a distinct value for each virtual interface."
    DEFVAL { false }
    ::= { dot3ExtPkgOptIfEntry 13 }

dot3ExtPkgOptIfTransmitEnable OBJECT-TYPE
    SYNTAX TruthValue
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "Setting this object to true(1) will cause the optical
        interface to start transmission (according to the
        control protocol specified for the logical interface).
        Setting this object to false(2) will cause the
        interface to stop the optical transmission.
        When getting true(1), the optical interface is in
        transmitting mode (obeying to the logical control
        protocol).
        When getting false(2), the optical interface is not in
        transmitting mode.
        The write operation is not restricted in this document
        and can be done at any time. Changing
        dot3ExtPkgOptIfTransmitEnable state can lead to a halt
        in the optical transmission of the respective interface
        leading to an interruption of service of the users
        connected to the respective EPON interface.
        The object is relevant when the admin state of the
        interface is active as set by the dot3MpcpAdminState.
        This object is applicable for an OLT and an ONU. At the
        OLT it, has a distinct value for each virtual interface."
    DEFVAL { false }
    ::= { dot3ExtPkgOptIfEntry 14 }

-- Conformance statements

-- Conformance Groups

dot3EponGroups          OBJECT IDENTIFIER ::= { dot3EponConformance 1 }

dot3MpcpGroupBase OBJECT-GROUP
    OBJECTS {
        dot3MpcpOperStatus,
        dot3MpcpAdminState,
        dot3MpcpMode,
    }

```

```

        dot3MpcpSyncTime,
        dot3MpcpLinkID,
        dot3MpcpRemoteMACAddress,
        dot3MpcpRegistrationState,
        dot3MpcpMaximumPendingGrants,
        dot3MpcpTransmitElapsed,
        dot3MpcpReceiveElapsed,
        dot3MpcpRoundTripTime
    }
    STATUS current
    DESCRIPTION
        "A collection of objects of dot3 Mpcp Control entity state
        definition. Objects are per LLID."
    ::= { dot3EponGroups 1 }

dot3MpcpGroupStat OBJECT-GROUP
    OBJECTS {
        dot3MpcpMACCtrlFramesTransmitted,
        dot3MpcpMACCtrlFramesReceived,
        dot3MpcpDiscoveryWindowsSent,
        dot3MpcpDiscoveryTimeout,
        dot3MpcpTxRegRequest,
        dot3MpcpRxRegRequest,
        dot3MpcpTxRegAck,
        dot3MpcpRxRegAck,
        dot3MpcpTxReport,
        dot3MpcpRxReport,
        dot3MpcpTxGate,
        dot3MpcpRxGate,
        dot3MpcpTxRegister,
        dot3MpcpRxRegister
    }
    STATUS current
    DESCRIPTION
        "A collection of objects of dot3 Mpcp Statistics.
        Objects are per LLID."
    ::= { dot3EponGroups 2 }

dot3OmpGroupID OBJECT-GROUP
    OBJECTS {
        dot3OmpEmulationType
    }
    STATUS current
    DESCRIPTION
        "A collection of objects of dot3 OMP emulation entity
        state definition. Objects are per LLID."
    ::= { dot3EponGroups 3 }

dot3OmpGroupStat OBJECT-GROUP
    OBJECTS {
        dot3OmpEmulationSLDErrors,
        dot3OmpEmulationCRC8Errors,
        dot3OmpEmulationBadLLID,
        dot3OmpEmulationGoodLLID,
        dot3OmpEmulationOnuPonCastLLID,
        dot3OmpEmulationOltPonCastLLID,
        dot3OmpEmulationBroadcastBitNotOnuLlid,
        dot3OmpEmulationOnuLLIDNotBroadcast,
        dot3OmpEmulationBroadcastBitPlusOnuLlid,
    }

```

```

        dot3OmpEmulationNotBroadcastBitNotOnuLlid
    }
    STATUS current
    DESCRIPTION
        "A collection of objects of dot3 OMP emulation
        Statistics. Objects are per LLID."
    ::= { dot3EponGroups 4 }

dot3EponFecGroupAll OBJECT-GROUP
    OBJECTS {
        dot3EponFecPCSCodingViolation,
        dot3EponFecAbility,
        dot3EponFecMode,
        dot3EponFecCorrectedBlocks,
        dot3EponFecUncorrectableBlocks,
        dot3EponFecBufferHeadCodingViolation
    }
    STATUS current
    DESCRIPTION
        "A collection of objects of dot3 FEC group control and
        statistics. Objects are per LLID."
    ::= { dot3EponGroups 5 }

dot3ExtPkgGroupControl OBJECT-GROUP
    OBJECTS {
        dot3ExtPkgObjectReset,
        dot3ExtPkgObjectPowerDown,
        dot3ExtPkgObjectNumberOfLLIDs,
        dot3ExtPkgObjectFecEnabled,
        dot3ExtPkgObjectReportMaximumNumQueues,
        dot3ExtPkgObjectRegisterAction
    }
    STATUS current
    DESCRIPTION
        "A collection of objects of dot3ExtPkg control
        definition. Objects are per LLID."
    ::= { dot3EponGroups 6 }

dot3ExtPkgGroupQueue OBJECT-GROUP
    OBJECTS {
        dot3ExtPkgObjectReportNumThreshold,
        dot3ExtPkgObjectReportMaximumNumThreshold,
        dot3ExtPkgStatTxFramesQueue,
        dot3ExtPkgStatRxFramesQueue,
        dot3ExtPkgStatDroppedFramesQueue
    }
    STATUS current
    DESCRIPTION
        "A collection of objects of dot3ExtPkg Queue
        control. Objects are per LLID, per queue."
    ::= { dot3EponGroups 7 }

dot3ExtPkgGroupQueueSets OBJECT-GROUP
    OBJECTS {
        dot3ExtPkgObjectReportThreshold
    }
    STATUS current
    DESCRIPTION
        "A collection of objects of dot3ExtPkg queue_set

```

```

        control. Objects are per LLID, per queue, per
        queue_set."
 ::= { dot3EponGroups 8 }

dot3ExtPkgGroupOptIf OBJECT-GROUP
OBJECTS {
dot3ExtPkgOptIfSuspectedFlag,
dot3ExtPkgOptIfInputPower,
dot3ExtPkgOptIfLowInputPower,
dot3ExtPkgOptIfHighInputPower,
dot3ExtPkgOptIfLowerInputPowerThreshold,
dot3ExtPkgOptIfUpperInputPowerThreshold,
dot3ExtPkgOptIfOutputPower,
dot3ExtPkgOptIfLowOutputPower,
dot3ExtPkgOptIfHighOutputPower,
dot3ExtPkgOptIfLowerOutputPowerThreshold,
dot3ExtPkgOptIfUpperOutputPowerThreshold,
dot3ExtPkgOptIfSignalDetect,
dot3ExtPkgOptIfTransmitAlarm,
dot3ExtPkgOptIfTransmitEnable
}
STATUS current
DESCRIPTION
    "A collection of objects of control and status indication
    of the optical interface.
    Objects are per LLID."
 ::= { dot3EponGroups 9 }

-- Compliance statements

dot3EponCompliances
    OBJECT IDENTIFIER ::= { dot3EponConformance 2 }

dot3MPCPCompliance MODULE-COMPLIANCE
STATUS current
DESCRIPTION "The compliance statement for Multi-Point
Control Protocol interfaces."

MODULE -- this module
MANDATORY-GROUPS { dot3MpcpGroupBase}

GROUP dot3MpcpGroupStat
DESCRIPTION "This group is mandatory for all MPCP supporting
interfaces for statistics collection."
 ::= { dot3EponCompliances 1}

dot3OmpeCompliance MODULE-COMPLIANCE
STATUS current
DESCRIPTION "The compliance statement for OMPeMulation
interfaces."

MODULE -- this module
MANDATORY-GROUPS { dot3OmpeGroupID}

GROUP dot3OmpeGroupStat
DESCRIPTION "This group is mandatory for all OMPeMulation
supporting interfaces for statistics collection."
 ::= { dot3EponCompliances 2}

```

```
dot3EponFecCompliance MODULE-COMPLIANCE
    STATUS      current
    DESCRIPTION "The compliance statement for FEC EPON interfaces.
                This group is mandatory for all FEC supporting
                interfaces for control and statistics collection."

    MODULE -- this module
    MANDATORY-GROUPS { dot3EponFecGroupAll }

    ::= { dot3EponCompliances 3}

dot3ExtPkgCompliance MODULE-COMPLIANCE
    STATUS      current
    DESCRIPTION "The compliance statement for EPON Interfaces
                using the extended package."

    MODULE -- this module
    MANDATORY-GROUPS { dot3ExtPkgGroupControl }

    GROUP      dot3ExtPkgGroupQueue
    DESCRIPTION " This group is mandatory for all EPON interfaces
                supporting REPORT queue management of the extended
                package."

    GROUP      dot3ExtPkgGroupQueueSets
    DESCRIPTION " This group is mandatory for all EPON interfaces
                supporting REPORT queue_sets management of the
                extended package."

    GROUP      dot3ExtPkgGroupOptIf
    DESCRIPTION "This group is mandatory for all EPON interfaces
                supporting optical interfaces management,
                of the extended package."

    ::= { dot3EponCompliances 4}

END
```

## 10. Ethernet-like interface MIB module

### 10.1 Introduction

This clause defines a portion of the Management Information Base (MIB) for use with SNMP. In particular, it defines objects for managing Ethernet-like interfaces.

### 10.2 Overview

Instances of these object types represent attributes of an interface to an Ethernet-like communications medium.

The definitions presented here are based on Clause 30 of IEEE Std 802.3. Implementors of these MIB objects should note that IEEE Std 802.3 explicitly describes (in the form of Pascal pseudocode) when, where, and how various MAC attributes are measured. IEEE Std 802.3 also describes the effects of MAC actions that may be invoked by manipulating instances of the MIB objects defined here.

To the extent that some of the attributes defined in IEEE Std 802.3 are represented by previously defined objects in MIB-2 from IETF RFC 1213 or in the Interfaces Group MIB defined in IETF RFC 2863, such attributes are not redundantly represented by objects defined in this clause. Among the attributes represented by objects defined in other MIB module specifications are the number of octets transmitted or received on a particular interface, the number of frames transmitted or received on a particular interface, the promiscuous status of an interface, the MAC address of an interface, and multicast information associated with an interface.

#### 10.2.1 Relation to MIB-2

This subclause applies only when this MIB is used in conjunction with the IETF RFC 1213 interface group.

The relationship between an Ethernet-like interface and an interface in the context of MIB-2 is one-to-one. As such, the value of an ifIndex object instance can be directly used to identify corresponding instances of the objects defined herein.

#### 10.2.2 Relation to the Interfaces Group MIB

The Interfaces Group MIB defined in IETF RFC 2863 requires that any MIB that is an adjunct of the Interfaces Group MIB clarify specific areas within the Interfaces Group MIB. These areas were intentionally left vague in the Interfaces Group MIB to avoid over constraining the MIB, thereby precluding management of certain media-types.

Section 4 of IETF RFC 2863 enumerates several areas which a media-specific MIB must (wherein the word “must” is used in accordance with the requirements of IETF RFC 2119) clarify. Each of these areas is addressed in a following subclause. The implementor is referred to IETF RFC 2863 in order to understand the general intent of these areas.

##### 10.2.2.1 ifRcvAddressTable

This table contains all IEEE 802.3 addresses, unicast, multicast, and broadcast, for which this interface will receive packets and forward them up to a higher layer entity for local consumption. The format of the address, contained in ifRcvAddressAddress, is the same as for ifPhysAddress.

In the event that the interface is part of a MAC bridge, this table does not include unicast addresses that are accepted for possible forwarding out some other port. This table is explicitly not intended to provide a bridge address filtering mechanism.

### 10.2.2.2 ifType

All Ethernet-like interfaces shall return ethernetCsmacd(6) for ifType. Information on the particular port type and operating speed is available from ifSpeed in the Interfaces Group MIB, and ifMauType in the MAU-MIB module defined in Clause 13. All Ethernet-like interfaces shall also implement the MAU-MIB module defined in Clause 13.<sup>16</sup>

### 10.2.2.3 ifXxxOctets

The Interfaces Group MIB octet counters, ifInOctets, ifOutOctets, ifHCInOctets, and ifHCOctets include all octets in valid frames sent or received on the interface, including the MAC header and FCS, but not the preamble, start of frame delimiter, or extension octets. This corresponds to the definition of frameSize/8 in 4.2.7.1 of IEEE Std 802.3 (frameSize is defined in bits rather than octets, and is defined as  $2 \times \text{addressSize} + \text{lengthOrTypeSize} + \text{dataSize} + \text{crcSize}$ ). They do not include the number of octets in collided or failed transmit attempts, since the MAC layer driver typically does not have visibility to count these octets. They also do not include octets in received invalid frames, since this information is normally not passed to the MAC layer, and since non-promiscuous MAC implementations cannot reliably determine whether an invalid frame was actually addressed to this station.

Note that these counters do include octets in valid MAC control frames sent or received on the interface, as well as octets in otherwise valid received MAC frames that are discarded by the MAC layer for some reason (insufficient buffer space, unknown protocol, etc.).

Note that the octet counters in IF-MIB do not exactly match the definition of the octet counters in IEEE Std 802.3. aOctetsTransmittedOK and aOctetsReceivedOK count only the octets in the clientData and Pad fields, whereas ifInOctets and ifOutOctets include the entire MAC frame, including MAC header and FCS. However, the IF-MIB counters can be derived from the IEEE 802.3 counters as follows in Equation (1) and Equation (2):

$$\text{ifInOctets} = \text{aOctetsReceivedOK} + (18 \times \text{aFramesReceivedOK}) \quad (1)$$

$$\text{ifOutOctets} = \text{aOctetsTransmittedOK} + (18 \times \text{aFramesTransmittedOK}) \quad (2)$$

Another difference to keep in mind between the IF-MIB counters and IEEE 802.3 counters is that, in IEEE Std 802.3, the frame counters and octet counters are always incremented together. aOctetsTransmittedOK counts the number of octets in frames that were counted by aFramesTransmittedOK. aOctetsReceivedOK counts the number of octets in frames that were counted by aFramesReceivedOK. This is not the case with the IF-MIB counters. The IF-MIB octet counters count the number of octets sent to or received from the layer below this interface, whereas the packet counters count the number of packets sent to or received from the layer above. Therefore, received MAC Control frames, ifInDiscards, and ifInUnknownProtos are counted by ifInOctets, but not ifInXcastPkts. Transmitted MAC Control frames are counted by ifOutOctets, but not ifOutXcastPkts. ifOutDiscards and ifOutErrors are counted by ifOutXcastPkts, but not ifOutOctets.

### 10.2.2.4 ifXxxXcastPkts

The packet counters in the IF-MIB do not exactly match the definition of the frame counters in IEEE Std 802.3. aFramesTransmittedOK counts the number of frames successfully transmitted on the interface,

<sup>16</sup>There are three other interface types defined in IANAifType-MIB for Ethernet, namely fastEther(62), fastEtherFX(69), and gigabitEthernet(117). Management applications should be prepared to receive these obsolete ifType values from older implementations.

whereas `ifOutUcastPkts`, `ifOutMulticastPkts`, and `ifOutBroadcastPkts` count the number of transmit requests made from a higher layer, whether or not the transmit attempt was successful. This means that packets counted by `ifOutErrors` or `ifOutDiscards` are also counted by `ifOutXcastPkts`, but are not counted by `aFramesTransmittedOK`. This also means that, since MAC Control frames are generated by a sublayer internal to the interface layer rather than by a higher layer, they are not counted by `ifOutXcastPkts`, but are counted by `aFramesTransmittedOK`.


$$\begin{aligned} \text{aFramesTransmittedOK} = & \text{ifOutUcastPkts} + \text{ifOutMulticastPkts} \\ & + \text{ifOutBroadcastPkts} + \text{dot3OutPauseFrames} \\ & - (\text{ifOutErrors} + \text{ifOutDiscards}) \end{aligned} \quad (3)$$

Similarly, `aFramesReceivedOK` counts the number of frames received successfully by the interface, whether or not they are passed to a higher layer, whereas `ifInUcastPkts`, `ifInMulticastPkts`, and `ifInBroadcastPkts` count only the number of packets passed to a higher layer. This means that packets counted by `ifInDiscards` or `ifInUnknownProtos` are also counted by `aFramesReceivedOK`, but are not counted by `ifInXcastPkts`. This also means that, since MAC Control frames are consumed by a sublayer internal to the interface layer and not passed to a higher layer, they are not counted by `ifInXcastPkts`, but are counted by `aFramesReceivedOK`.

$$\begin{aligned} \text{aFramesReceivedOK} = & \text{ifInUcastPkts} + \text{ifInMulticastPkts} \\ & + \text{ifInBroadcastPkts} + \text{dot3InPauseFrames} \\ & + \text{ifInDiscards} + \text{ifInUnknownProtos} \end{aligned} \quad (4)$$

This specification chooses to treat MAC control frames as being originated and consumed within the interface and not counted by the IF-MIB packet counters. MAC control frames are normally sent as multicast packets. In many network environments, MAC control frames can greatly outnumber multicast frames carrying actual data. If MAC control frames were included in the `ifInMulticastPkts` and `ifOutMulticastPkts`, the count of data-carrying multicast packets would tend to be drowned out by the count of MAC control frames, rendering those counters considerably less useful.

To better understand the issues surrounding the mapping of the IF-MIB packet and octet counters to an Ethernet interface, it is useful to refer to a Case diagram (Case and Partridge [B1]) for the IF-MIB counters, with modifications to show the proper interpretation for the Ethernet interface. This is depicted in Figure 10–1.

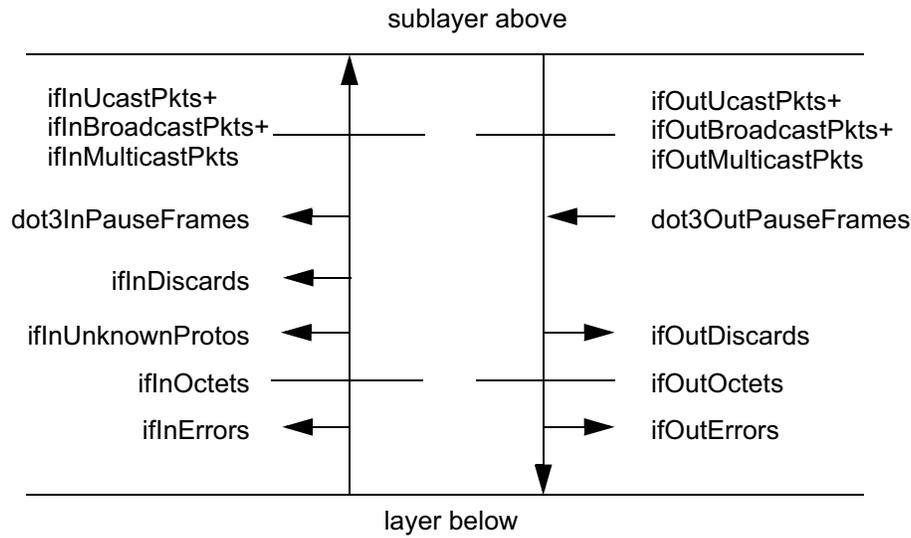

**Figure 10–1—Case diagram for the IF-MIB counters**

#### 10.2.2.5 ifMtu

The defined standard MTU for Ethernet-like interfaces is 1500 octets. However, many implementations today support larger packet sizes than IEEE Std 802.3. The value of this object shall reflect the actual MTU in use on the interface, whether it matches the standard MTU or not.

This value should reflect the value seen by the MAC client interface. When a higher layer protocol, like IP, is running over Ethernet framing, this is the MTU that will be seen by that higher layer protocol. However, most Ethernet-like interfaces today run multiple protocols that use a mix of different framing types. For example, an IEEE 802.2 LLC type 1 client protocol will see an MTU of 1497 octets on an interface using the IEEE standard maximum packet size, and a protocol running over SNAP will see an MTU of 1492 octets on an interface using the IEEE standard maximum packet size. However, since specification mandates using the MTU as seen at the MAC client interface, the value of `ifMtu` would be reported as 1500 octets in these cases.

#### 10.2.2.6 ifSpeed and ifHighSpeed

For Ethernet-like interfaces operating at 1000 Megabits per second (Mb/s) or less, `ifSpeed` will represent the current operational speed of the interface in bits per second. For such interface types, this will be equal to 1 000 000 (1 million), 10 000 000 (10 million), 100 000 000 (100 million), or 1 000 000 000 (1 billion). `ifHighSpeed` will represent the current operational speed in millions of bits per second. For such Ethernet-like interfaces, this will be equal to 1, 10, 100, or 1000. If the interface implements Auto-Negotiation, Auto-Negotiation is enabled for this interface, and the interface has not yet negotiated to an operational speed, these objects should reflect the maximum speed supported by the interface.

For Ethernet-like interfaces operating at greater than 1000 Mb/s, `ifHighSpeed` will represent the current operational speed of the interface in millions of bits per second. Note that for WAN implementations, this will be the payload data rate over the WAN interface sublayer. For current implementations, this will be equal to 10 000 for LAN implementations of 10 Gb/s, and 9294 for WAN implementations of the 10 Gb/s MAC over an OC-192 PHY. For these speeds, `ifSpeed` should report a maximum unsigned 32-bit value of 4 294 967 295 as specified in IETF RFC 2863.

These objects shall indicate the correct line speed regardless of the current duplex mode. They shall not indicate a doubled value when operating in full-duplex mode. The duplex mode of the interface may be determined by examining either the dot3StatsDuplexStatus object in this MIB module, or the ifMauType MAU-MIB module object defined in Clause 13.

#### 10.2.2.7 ifPhysAddress

This object contains the IEEE 802.3 address that is placed in the source-address field of any Ethernet, Starlan, or IEEE 802.3 frames that originate at this interface. Usually this will be kept in ROM on the interface hardware. Some systems may set this address via software.

In a system where there are several such addresses the designer has a tougher choice. The address chosen should be the one most likely to be of use to network management (e.g., the address placed in ARP responses for systems that are primarily IP systems).

If the designer truly cannot choose, use of the factory-provided ROM address is suggested.

If the address cannot be determined, an octet string of zero length should be returned.

The address is stored in binary in this object. The address is stored in “canonical” bit order, that is, the Group Bit is positioned as the low-order bit of the first octet. Thus, the first byte of a multicast address would have the bit 0x01 set.

#### 10.2.2.8 Specific Interfaces Group MIB objects

Table 10–1 provides specific implementation guidelines for applying the Interfaces Group objects to Ethernet-like interfaces.

**Table 10–1—Implementation guidelines**

Object	Guidelines
ifIndex	Each Ethernet-like interface is represented by an ifEntry. The dot3StatsTable in this MIB module is indexed by dot3StatsIndex. The interface identified by a particular value of dot3StatsIndex is the same interface as identified by the same value of ifIndex.
ifDescr	Refer to IETF RFC 2863.
ifType	Refer to 10.2.2.2.
ifMtu	Refer to 10.2.2.5.
ifSpeed	Refer to 10.2.2.6.
ifPhysAddress	Refer to 10.2.2.7.
ifAdminStatus	Write access is not required. Support for ‘testing’ is not required.
ifOperStatus	The operational state of the interface. Support for ‘testing’ is not required. The value ‘dormant’ has no meaning for an Ethernet-like interface.
ifLastChange	Refer to IETF RFC 2863.

**Table 10–1—Implementation guidelines (continued)**

Object	Guidelines
ifInOctets	The number of octets in valid MAC frames received on this interface, including the MAC header and FCS. This does include the number of octets in valid MAC Control frames received on this interface. See 10.2.2.3.
ifInUcastPkts	Refer to IETF RFC 2863. Note that this does not include MAC Control frames, since MAC Control frames are consumed by the interface layer and are not passed to any higher layer protocol. See 10.2.2.4.
ifInDiscards	Refer to IETF RFC 2863.
ifInErrors	The sum for this interface of dot3StatsAlignmentErrors, dot3StatsFCSErrors, dot3StatsFrameTooLongs, and dot3StatsInternalMacReceiveErrors.
ifInUnknownProtos	Refer to IETF RFC 2863.
ifOutOctets	The number of octets transmitted in valid MAC frames on this interface, including the MAC header and FCS. This does include the number of octets in valid MAC Control frames transmitted on this interface. See 10.2.2.3.
ifOutUcastPkts	Refer to IETF RFC 2863. Note that this does not include MAC Control frames, since MAC Control frames are generated by the interface layer, and are not passed from any higher layer protocol. See 10.2.2.4.
ifOutDiscards	Refer to IETF RFC 2863.
ifOutErrors	The sum for this interface of: dot3StatsSQETestErrors, dot3StatsLateCollisions, dot3StatsExcessiveCollisions, dot3StatsInternalMacTransmitErrors and dot3StatsCarrierSenseErrors.
ifName	Locally-significant textual name for the interface (e.g., lan0).
ifInMulticastPkts	Refer to IETF RFC 2863. Note that this does not include MAC Control frames, since MAC Control frames are consumed by the interface layer and are not passed to any higher layer protocol. See 10.2.2.4.
ifInBroadcastPkts	Refer to IETF RFC 2863. Note that this does not include MAC Control frames, since MAC Control frames are consumed by the interface layer, and are not passed to any higher layer protocol. See 10.2.2.4.
ifOutMulticastPkts	Refer to IETF RFC 2863. Note that this does not include MAC Control frames, since MAC Control frames are generated by the interface layer, and are not passed from any higher layer protocol. See 10.2.2.4.
ifOutBroadcastPkts	Refer to IETF RFC 2863. Note that this does not include MAC Control frames, since MAC Control frames are generated by the interface layer, and are not passed from any higher layer protocol. See 10.2.2.4.
ifHCInOctets, ifHCOctets	64-bit versions of counters. Required for Ethernet-like interfaces that are capable of operating at 20 Mb/s or faster, even if the interface is currently operating at less than 20 Mb/s.

**Table 10–1—Implementation guidelines (continued)**

Object	Guidelines
ifHCInUcastPkts, ifHCInMulticastPkts, ifHCInBroadcastPkts, ifHCOutUcastPkts, ifHCOutMulticastPkts, ifHCOutBroadcastPkts	64-bit versions of packet counters. Required for Ethernet-like interfaces that are capable of operating at 640 Mb/s or faster, even if the interface is currently operating at less than 640 Mb/s.
ifLinkUpDownTrapEnable	Refer to IETF RFC 2863. Default is ‘enabled’.
ifHighSpeed	Refer to 10.2.2.6.
ifPromiscuousMode	Refer to IETF RFC 2863.
ifConnectorPresent	This will normally be ‘true’. It will be ‘false’ in the case where this interface uses the WAN Interface Sublayer. See Clause 12 for details.
ifAlias	Refer to IETF RFC 2863.
ifCounterDiscontinuityTime	Refer to IETF RFC 2863. Note that a discontinuity in the Interfaces Group MIB counters may also indicate a discontinuity in some or all of the counters in this MIB that are associated with that interface.
ifStackHigherLayer, ifStackLowerLayer, ifStackStatus	Refer to 11.2.1.1.
ifRcvAddressAddress, ifRcvAddressStatus, ifRcvAddressType	Refer to 10.2.2.1.

### 10.2.3 Relation to the IEEE 802.3 MAU-MIB module

Support for the mauModIfCompl3 compliance statement of the MAU-MIB module defined in Clause 13 is required for Ethernet-like interfaces. This MIB module is needed in order to allow applications to determine the current MAU type in use by the interface, and to control autonegotiation and duplex mode for the interface. Implementing this MIB module without implementing the MAU-MIB module would leave applications with no standard way to determine the media type in use, and no standard way to control the duplex mode of the interface.

### 10.2.4 Mapping of IEEE 802.3 managed objects

The mapping of IEEE 802.3 managed objects to SNMP objects is shown in Table 10–2.

**Table 10–2—Mapping of IEEE 802.3 managed objects**

IEEE 802.3 managed object		Corresponding SNMP object
oMacEntity	.aMACID	dot3StatsIndex or IF-MIB – ifIndex
	.aFramesTransmittedOK	IF-MIB – ifOutUCastPkts + ifOutMulticastPkts + ifOutBroadcastPkts <sup>a</sup>
	.aSingleCollisionFrames	dot3StatsSingleCollisionFrames
	.aMultipleCollisionFrames	dot3StatsMultipleCollisionFrames
	.aFramesReceivedOK	IF-MIB – ifInUcastPkts + ifInMulticastPkts + ifInBroadcastPkts <sup>a</sup>
	.aFrameCheckSequenceErrors	dot3StatsFCSErrors
	.aAlignmentErrors	dot3StatsAlignmentErrors
	.aOctetsTransmittedOK	IF-MIB – ifOutOctets <sup>a</sup>
	.aFramesWithDeferredXmissions	dot3StatsDeferredTransmissions
	.aLateCollisions	dot3StatsLateCollisions
	.aFramesAbortedDueToXSColls	dot3StatsExcessiveCollisions
	.aFramesLostDueToIntMACXmitError	dot3StatsInternalMacTransmitErrors
	.aCarrierSenseErrors	dot3StatsCarrierSenseErrors
	.aOctetsReceivedOK	IF-MIB – ifInOctets <sup>a</sup>
	.aFramesLostDueToIntMACRcvError	dot3StatsInternalMacReceiveErrors
	.aPromiscuousStatus	IF-MIB – ifPromiscuousMode
	.aReadMulticastAddressList	IF-MIB – ifRcvAddressTable
	.aMulticastFramesXmittedOK	IF-MIB – ifOutMulticastPkts <sup>a</sup>
	.aBroadcastFramesXmittedOK	IF-MIB – ifOutBroadcastPkts <sup>a</sup>
	.aMulticastFramesReceivedOK	IF-MIB – ifInMulticastPkts <sup>a</sup>
	.aBroadcastFramesReceivedOK	IF-MIB – ifInBroadcastPkts <sup>a</sup>
	.aFrameTooLongErrors	dot3StatsFrameTooLongs
	.aReadWriteMACAddress	IF-MIB – ifPhysAddress
	.aCollisionFrames	dot3CollFrequencies
	.aDuplexStatus	dot3StatsDuplexStatus
	.aRateControlAbility	dot3StatsRateControlAbility
	.aMaxFrameLength	dot3StatsMaxFrameLength
	.aRateControlStatus	dot3StatsRateControlStatus

**Table 10–2—Mapping of IEEE 802.3 managed objects (continued)**

IEEE 802.3 managed object		Corresponding SNMP object
oPHYEntity	.aPHYID	dot3StatsIndex or IF-MIB – ifIndex
	.aSQUETestErrors	dot3StatsSQUETestErrors
	.aSymbolErrorDuringCarrier	dot3StatsSymbolErrors
oMACControlEntity	.aMACControlID	dot3StatsIndex or IF-MIB – ifIndex
	.aMACControlFunctionsSupported	dot3ControlFunctionsSupported and dot3ControlFunctionsEnabled
	.aUnsupportedOpcodesReceived	dot3ControlInUnknownOpcodes
oPAUSEEntity	.aPAUSEMACCtrlFramesTransmitted	dot3OutPauseFrames
	.aPAUSEMACCtrlFramesReceived	dot3InPauseFrames

<sup>a</sup>Note that the octet counters in IF-MIB do not exactly match the definition of the octet counters in IEEE Std 802.3. See 10.2.2.3 for details.

Also note that the packet counters in the IF-MIB do not exactly match the definition of the frame counters in IEEE Std 802.3. See 10.2.2.4 for details.

### 10.3 Security considerations for Ethernet-like interface MIB module

There is one management object defined in this MIB that has a MAX-ACCESS clause of read-write. That object, dot3PauseAdminMode, may be used to change the flow control configuration on a network interface, which may result in dropped packets, or sending flow control packets on links where the link partner will not understand them. Either action could be detrimental to network performance.

Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations.

Most of the objects in this MIB module contain statistical information about particular network links. In some network environments, this information may be considered sensitive. It is thus important to control GET and/or NOTIFY access to these objects and possibly to encrypt the values of these objects when sending them over the network via SNMP.

### 10.4 MIB module definition

An ASCII text version of the MIB definition can be found at the following URL:<sup>17</sup>

[http://www.ieee802.org/3/be/public/mib\\_modules/20110202/802dot3dot1C10mib.txt](http://www.ieee802.org/3/be/public/mib_modules/20110202/802dot3dot1C10mib.txt)

<sup>17</sup>Copyright release for MIB modules: Users of this standard may freely reproduce the MIB module contained in this subclause so that it can be used for its intended purpose.



```

IEEE8023-EtherLike-MIB DEFINITIONS ::= BEGIN

IMPORTS
    MODULE-IDENTITY, OBJECT-TYPE,
    Integer32, Counter32, Counter64, org
        FROM SNMPv2-SMI
    MODULE-COMPLIANCE, OBJECT-GROUP
        FROM SNMPv2-CONF
    TruthValue
        FROM SNMPv2-TC
    ifIndex, InterfaceIndex
        FROM IF-MIB;

ieee8023etherMIB MODULE-IDENTITY
    LAST-UPDATED "201102020000Z" -- February 2, 2011
    ORGANIZATION
        "IEEE 802.3 working group"
    CONTACT-INFO
        "WG-URL: http://www.ieee802.org/3/index.html
        WG-EMail: STDS-802-3-MIB@LISTSERV.IEEE.ORG

        Contact: Howard Frazier
        Postal: 3151 Zanker Road
              San Jose, CA 95134
              USA
        Tel:    +1.408.922.8164
        E-mail: hfrazier@broadcom.com"

    DESCRIPTION "The MIB module to describe generic objects for
        Ethernet-like network interfaces."

    REVISION    "201102020000Z" -- February 2, 2011
    DESCRIPTION
        "Initial version, based on an earlier version published in RFC 3635."

    ::= { org ieee(111) standards-association-numbers-series-standards(2)
        lan-man-stds(802) ieee802dot3(3) ieee802dot3dot1mibs(1) 10 }

ieee8023etherMIBObjects OBJECT IDENTIFIER ::= { ieee8023etherMIB 1 }

-- the Ethernet-like Statistics group

dot3StatsTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Dot3StatsEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "Statistics for a collection of Ethernet-like
        interfaces attached to a particular system.
        There will be one row in this table for each
        Ethernet-like interface in the system."
    ::= { ieee8023etherMIBObjects 2 }

dot3StatsEntry OBJECT-TYPE
    SYNTAX      Dot3StatsEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "Statistics for a particular interface to an
        Ethernet-like medium."

```

```

INDEX      { dot3StatsIndex }
 ::= { dot3StatsTable 1 }

Dot3StatsEntry ::=
SEQUENCE {

    dot3StatsIndex          InterfaceIndex,
    dot3StatsAlignmentErrors Counter32,
    dot3StatsFCSErrors      Counter32,
    dot3StatsSingleCollisionFrames Counter32,
    dot3StatsMultipleCollisionFrames Counter32,
    dot3StatsSQETestErrors  Counter32,
    dot3StatsDeferredTransmissions Counter32,
    dot3StatsLateCollisions Counter32,
    dot3StatsExcessiveCollisions Counter32,
    dot3StatsInternalMacTransmitErrors Counter32,
    dot3StatsCarrierSenseErrors Counter32,
    dot3StatsFrameTooLongs Counter32,
    dot3StatsInternalMacReceiveErrors Counter32,
    dot3StatsSymbolErrors Counter32,
    dot3StatsDuplexStatus INTEGER,
    dot3StatsRateControlAbility TruthValue,
    dot3StatsRateControlStatus INTEGER,
    dot3StatsMaxFrameLength INTEGER
}

dot3StatsIndex OBJECT-TYPE
SYNTAX      InterfaceIndex
MAX-ACCESS not-accessible
STATUS      current
DESCRIPTION "An index value that uniquely identifies an
            interface to an Ethernet-like medium. The
            interface identified by a particular value of
            this index is the same interface as identified
            by the same value of ifIndex."
REFERENCE   "RFC 2863, ifIndex"
 ::= { dot3StatsEntry 1 }

dot3StatsAlignmentErrors OBJECT-TYPE
SYNTAX      Counter32
MAX-ACCESS read-only
STATUS      current
DESCRIPTION "A count of frames received on a particular
            interface that are not an integral number of
            octets in length and do not pass the FCS check.

            The count represented by an instance of this
            object is incremented when the alignmentError
            status is returned by the MAC service to the
            LLC (or other MAC user). Received frames for
            which multiple error conditions pertain are,
            according to the conventions of IEEE 802.3
            Layer Management, counted exclusively according

            to the error status presented to the LLC.

            This counter does not increment for group
            encoding schemes greater than 4 bits per group."

```

For interfaces operating at 10 Gb/s, this counter can roll over in less than 5 minutes if it is incrementing at its maximum rate. Since that amount of time could be less than a management station's poll cycle time, in order to avoid a loss of information, a management station is advised to poll the dot3HCStatsAlignmentErrors object for 10 Gb/s or faster interfaces.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.7,  
aAlignmentErrors"  
::= { dot3StatsEntry 2 }

dot3StatsFCSErrors OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of frames received on a particular interface that are an integral number of octets in length but do not pass the FCS check. This count does not include frames received with frame-too-long or frame-too-short error.

The count represented by an instance of this object is incremented when the frameCheckError status is returned by the MAC service to the LLC (or other MAC user). Received frames for which multiple error conditions pertain are, according to the conventions of IEEE 802.3 Layer Management, counted exclusively according to the error status presented to the LLC.

Note: Coding errors detected by the physical layer for speeds above 10 Mb/s will cause the frame to fail the FCS check.

For interfaces operating at 10 Gb/s, this counter can roll over in less than 5 minutes if

it is incrementing at its maximum rate. Since that amount of time could be less than a management station's poll cycle time, in order to avoid a loss of information, a management station is advised to poll the dot3HCStatsFCSErrors object for 10 Gb/s or faster interfaces.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.6,  
aFrameCheckSequenceErrors."  
::= { dot3StatsEntry 3 }

```

dot3StatsSingleCollisionFrames OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "A count of frames that are involved in a single
                collision, and are subsequently transmitted
                successfully.

                A frame that is counted by an instance of this
                object is also counted by the corresponding
                instance of either the ifOutUcastPkts,
                ifOutMulticastPkts, or ifOutBroadcastPkts,
                and is not counted by the corresponding
                instance of the dot3StatsMultipleCollisionFrames
                object.

                This counter does not increment when the
                interface is operating in full-duplex mode.

                Discontinuities in the value of this counter can
                occur at re-initialization of the management
                system, and at other times as indicated by the
                value of ifCounterDiscontinuityTime."
    REFERENCE   "IEEE Std 802.3, 30.3.1.1.3,
                aSingleCollisionFrames."
    ::= { dot3StatsEntry 4 }

dot3StatsMultipleCollisionFrames OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "A count of frames that are involved in more
                than one collision and are subsequently
                transmitted successfully.

                A frame that is counted by an instance of this
                object is also counted by the corresponding
                instance of either the ifOutUcastPkts,
                ifOutMulticastPkts, or ifOutBroadcastPkts,
                and is not counted by the corresponding
                instance of the dot3StatsSingleCollisionFrames
                object.

                This counter does not increment when the
                interface is operating in full-duplex mode.

                Discontinuities in the value of this counter can
                occur at re-initialization of the management
                system, and at other times as indicated by the
                value of ifCounterDiscontinuityTime."
    REFERENCE   "IEEE Std 802.3, 30.3.1.1.4,
                aMultipleCollisionFrames."
    ::= { dot3StatsEntry 5 }

dot3StatsSQETestErrors OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only

```

STATUS current  
 DESCRIPTION "A count of times that the SQE TEST ERROR is received on a particular interface. The SQE TEST ERROR is set in accordance with the rules for verification of the SQE detection mechanism in the PLS Carrier Sense Function as described in IEEE Std 802.3, 7.2.4.6.

This counter does not increment on interfaces operating at speeds greater than 10 Mb/s, or on interfaces operating in full-duplex mode.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 7.2.4.6, also 30.3.2.1.4, aSQETestErrors."

::= { dot3StatsEntry 6 }

dot3StatsDeferredTransmissions OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of frames for which the first transmission attempt on a particular interface is delayed because the medium is busy.

The count represented by an instance of this object does not include frames involved in collisions.

This counter does not increment when the interface is operating in full-duplex mode.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.9, aFramesWithDeferredXmissions."

::= { dot3StatsEntry 7 }

dot3StatsLateCollisions OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "The number of times that a collision is detected on a particular interface later than one slotTime into the transmission of a packet.

A (late) collision included in a count represented by an instance of this object is also considered as a (generic) collision for purposes of other collision-related statistics.

This counter does not increment when the

interface is operating in full-duplex mode.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.10,  
aLateCollisions."  
 ::= { dot3StatsEntry 8 }

dot3StatsExcessiveCollisions OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of frames for which transmission on a particular interface fails due to excessive collisions.

This counter does not increment when the interface is operating in full-duplex mode.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.11,  
aFramesAbortedDueToXSColls."  
 ::= { dot3StatsEntry 9 }

dot3StatsInternalMacTransmitErrors OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of frames for which transmission on a particular interface fails due to an internal MAC sublayer transmit error. A frame is only counted by an instance of this object if it is not counted by the corresponding instance of either the dot3StatsLateCollisions object, the dot3StatsExcessiveCollisions object, or the dot3StatsCarrierSenseErrors object.

The precise meaning of the count represented by an instance of this object is implementation-specific. In particular, an instance of this object may represent a count of transmission errors on a particular interface that are not otherwise counted.

For interfaces operating at 10 Gb/s, this counter can roll over in less than 5 minutes if it is incrementing at its maximum rate. Since that amount of time could be less than a management station's poll cycle time, in order to avoid a loss of information, a management station is advised to poll the dot3HCStatsInternalMacTransmitErrors object for 10 Gb/s or faster interfaces.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.12, aFramesLostDueToIntMACXmitError."

```
::= { dot3StatsEntry 10 }
```

dot3StatsCarrierSenseErrors OBJECT-TYPE

```
SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "The number of times that the carrier sense condition was lost or never asserted when attempting to transmit a frame on a particular interface.
```

The count represented by an instance of this object is incremented at most once per transmission attempt, even if the carrier sense condition fluctuates during a transmission attempt.

This counter does not increment when the interface is operating in full-duplex mode.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.13, aCarrierSenseErrors."

```
::= { dot3StatsEntry 11 }
```

-- { dot3StatsEntry 12 } is not assigned

dot3StatsFrameTooLongs OBJECT-TYPE

```
SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "A count of frames received on a particular interface that exceed the maximum permitted frame size.
```

The count represented by an instance of this object is incremented when the frameTooLong status is returned by the MAC service to the LLC (or other MAC user). Received frames for which multiple error conditions pertain are, according to the conventions of IEEE 802.3 Layer Management, counted exclusively according to the error status presented to the LLC.

For interfaces operating at 10 Gb/s, this counter can roll over in less than 80 minutes if it is incrementing at its maximum rate. Since

that amount of time could be less than a management station's poll cycle time, in order to avoid a loss of information, a management station is advised to poll the dot3HCStatsFrameTooLongs object for 10 Gb/s or faster interfaces.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.25,  
aFrameTooLongErrors."

::= { dot3StatsEntry 13 }

-- { dot3StatsEntry 14 } is not assigned

-- { dot3StatsEntry 15 } is not assigned

dot3StatsInternalMacReceiveErrors OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of frames for which reception on a particular interface fails due to an internal MAC sublayer receive error. A frame is only counted by an instance of this object if it is not counted by the corresponding instance of either the dot3StatsFrameTooLongs object, the dot3StatsAlignmentErrors object, or the dot3StatsFCSErrors object.

The precise meaning of the count represented by an instance of this object is implementation-specific. In particular, an instance of this object may represent a count of receive errors on a particular interface that are not otherwise counted.

For interfaces operating at 10 Gb/s, this counter can roll over in less than 5 minutes if

it is incrementing at its maximum rate. Since that amount of time could be less than a management station's poll cycle time, in order to avoid a loss of information, a management station is advised to poll the dot3HCStatsInternalMacReceiveErrors object for 10 Gb/s or faster interfaces.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.15,  
aFramesLostDueToIntMACRcvError."

::= { dot3StatsEntry 16 }

dot3StatsSymbolErrors OBJECT-TYPE

SYNTAX Counter32  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION "For an interface operating at 100 Mb/s, the number of times there was an invalid data symbol when a valid carrier was present.

For an interface operating in half-duplex mode at 1000 Mb/s, the number of times the receiving media is non-idle (a carrier event) for a period of time equal to or greater than slotTime, and during which there was at least one occurrence of an event that causes the PHY to indicate 'Data reception error' or 'carrier extend error' on the GMII.

For an interface operating in full-duplex mode at 1000 Mb/s, the number of times the receiving media is non-idle (a carrier event) for a period of time equal to or greater than minFrameSize, and during which there was at least one occurrence of an event that causes the PHY to indicate 'Data reception error' on the GMII.

For an interface operating at 10 Gb/s, the number of times the receiving media is non-idle (a carrier event) for a period of time equal to or greater than minFrameSize, and during which there was at least one occurrence of an event that causes the PHY to indicate 'Receive Error' on the XGMII.

The count represented by an instance of this object is incremented at most once per carrier event, even if multiple symbol errors occur during the carrier event. This count does not increment if a collision is present.

This counter does not increment when the interface is operating at 10 Mb/s.

For interfaces operating at 10 Gb/s, this counter can roll over in less than 5 minutes if it is incrementing at its maximum rate. Since that amount of time could be less than a

management station's poll cycle time, in order to avoid a loss of information, a management station is advised to poll the dot3HCStatsSymbolErrors object for 10 Gb/s or faster interfaces.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.2.1.5,  
 aSymbolErrorDuringCarrier."

::= { dot3StatsEntry 17 }

```

dot3StatsDuplexStatus OBJECT-TYPE
    SYNTAX      INTEGER {
                    unknown(1),
                    halfDuplex(2),
                    fullDuplex(3)
                }
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "The current mode of operation of the MAC
                entity. 'unknown' indicates that the current
                duplex mode could not be determined.

                Management control of the duplex mode is
                accomplished through the MAU MIB. When
                an interface does not support autonegotiation,
                or when autonegotiation is not enabled, the
                duplex mode is controlled using
                ifMauDefaultType. When autonegotiation is
                supported and enabled, duplex mode is controlled
                using ifMauAutoNegAdvertisedBits. In either
                case, the currently operating duplex mode is
                reflected both in this object and in ifMauType.

                Note that this object provides redundant
                information with ifMauType. Normally, redundant
                objects are discouraged. However, in this
                instance, it allows a management application to
                determine the duplex status of an interface
                without having to know every possible value of
                ifMauType. This was felt to be sufficiently
                valuable to justify the redundancy."
    REFERENCE  "IEEE Std 802.3, 30.3.1.1.32,
                aDuplexStatus."
    ::= { dot3StatsEntry 18 }

dot3StatsRateControlAbility OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "'true' for interfaces operating at speeds above
                1000 Mb/s that support Rate Control through
                lowering the average data rate of the MAC
                sublayer, with frame granularity, and 'false'
                otherwise."
    REFERENCE  "IEEE Std 802.3, 30.3.1.1.33,
                aRateControlAbility."
    ::= { dot3StatsEntry 19 }

dot3StatsRateControlStatus OBJECT-TYPE
    SYNTAX      INTEGER {
                    rateControlOff(1),
                    rateControlOn(2),
                    unknown(3)
                }
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "The current Rate Control mode of operation of
                the MAC sublayer of this interface."

```

```

REFERENCE      "IEEE Std 802.3, 30.3.1.1.34,
                aRateControlStatus."
 ::= { dot3StatsEntry 20 }

dot3StatsMaxFrameLength OBJECT-TYPE
SYNTAX         INTEGER {
                unknown(1),
                baseFrame(2),
                qTaggedFrame(3),
                envelopeFrame(4)
                }
MAX-ACCESS    read-only
STATUS        current
DESCRIPTION   "This indicates the MAC frame length at
                which the dot3StatsFrameTooLongs counter is
                incremented."
REFERENCE     "IEEE Std 802.3, 30.3.1.1.37, aMaxFrameLength."
 ::= { dot3StatsEntry 21 }

-- the Ethernet-like Collision Statistics group

-- Implementation of this group is optional; it is appropriate
-- for all systems which have the necessary metering

dot3CollTable OBJECT-TYPE
SYNTAX         SEQUENCE OF Dot3CollEntry
MAX-ACCESS    not-accessible
STATUS        current
DESCRIPTION   "A collection of collision histograms for a
                particular set of interfaces."
REFERENCE     "IEEE Std 802.3, 30.3.1.1.30,
                aCollisionFrames."
 ::= { ieee8023etherMIBObjects 5 }

dot3CollEntry OBJECT-TYPE
SYNTAX         Dot3CollEntry
MAX-ACCESS    not-accessible
STATUS        current
DESCRIPTION   "A cell in the histogram of per-frame
                collisions for a particular interface. An

                instance of this object represents the
                frequency of individual MAC frames for which
                the transmission (successful or otherwise) on a
                particular interface is accompanied by a
                particular number of media collisions."
INDEX         { ifIndex, dot3CollCount }
 ::= { dot3CollTable 1 }

Dot3CollEntry ::=
SEQUENCE {
    dot3CollCount      Integer32,
    dot3CollFrequencies Counter32
}

-- { dot3CollEntry 1 } is no longer in use

dot3CollCount OBJECT-TYPE
SYNTAX         Integer32 (1..16)

```

```

MAX-ACCESS not-accessible
STATUS current
DESCRIPTION "The number of per-frame media collisions for
             which a particular collision histogram cell
             represents the frequency on a particular
             interface."
 ::= { dot3CollEntry 2 }

```

dot3CollFrequencies OBJECT-TYPE

```

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION "A count of individual MAC frames for which the
             transmission (successful or otherwise) on a
             particular interface occurs after the
             frame has experienced exactly the number
             of collisions in the associated
             dot3CollCount object.

```

For example, a frame which is transmitted on interface 77 after experiencing exactly 4 collisions would be indicated by incrementing only dot3CollFrequencies.77.4. No other instance of dot3CollFrequencies would be incremented in this example.

This counter does not increment when the interface is operating in full-duplex mode.

Discontinuities in the value of this counter can

occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

```
 ::= { dot3CollEntry 3 }

```

dot3ControlTable OBJECT-TYPE

```

SYNTAX SEQUENCE OF Dot3ControlEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION "A table of descriptive and status information
             about the MAC Control sublayer on the
             Ethernet-like interfaces attached to a
             particular system. There will be one row in
             this table for each Ethernet-like interface in
             the system which implements the MAC Control
             sublayer. If some, but not all, of the
             Ethernet-like interfaces in the system implement
             the MAC Control sublayer, there will be fewer
             rows in this table than in the dot3StatsTable."
 ::= { ieee8023etherMIBObjects 9 }

```

dot3ControlEntry OBJECT-TYPE

```

SYNTAX Dot3ControlEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION "An entry in the table, containing information
             about the MAC Control sublayer on a single
             Ethernet-like interface."

```

```

INDEX      { dot3StatsIndex }
 ::= { dot3ControlTable 1 }

Dot3ControlEntry ::=
  SEQUENCE {
    dot3ControlFunctionsSupported      BITS,
    dot3ControlInUnknownOpcodes       Counter32,
    dot3HCControlInUnknownOpcodes     Counter64
  }

dot3ControlFunctionsSupported OBJECT-TYPE
  SYNTAX      BITS {
    pause(0)  -- 802.3 flow control
  }
  MAX-ACCESS  read-only
  STATUS      current
  DESCRIPTION "A list of the possible MAC Control functions
  implemented for this interface."
  REFERENCE   "IEEE Std 802.3, 30.3.3.2,
  aMACControlFunctionsSupported."

 ::= { dot3ControlEntry 1 }

dot3ControlInUnknownOpcodes OBJECT-TYPE
  SYNTAX      Counter32
  MAX-ACCESS  read-only
  STATUS      current
  DESCRIPTION "A count of MAC Control frames received on this
  interface that contain an opcode that is not
  supported by this device.

  For interfaces operating at 10 Gb/s, this
  counter can roll over in less than 5 minutes if
  it is incrementing at its maximum rate. Since
  that amount of time could be less than a
  management station's poll cycle time, in order
  to avoid a loss of information, a management
  station is advised to poll the
  dot3HCControlInUnknownOpcodes object for 10 Gb/s
  or faster interfaces.

  Discontinuities in the value of this counter can
  occur at re-initialization of the management
  system, and at other times as indicated by the
  value of ifCounterDiscontinuityTime."
  REFERENCE   "IEEE Std 802.3, 30.3.3.5,
  aUnsupportedOpcodesReceived"
 ::= { dot3ControlEntry 2 }

dot3HCControlInUnknownOpcodes OBJECT-TYPE
  SYNTAX      Counter64
  MAX-ACCESS  read-only
  STATUS      current
  DESCRIPTION "A count of MAC Control frames received on this
  interface that contain an opcode that is not
  supported by this device.

  This counter is a 64-bit version of
  dot3ControlInUnknownOpcodes. It should be used

```

on interfaces operating at 10 Gb/s or faster.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.3.5,  
aUnsupportedOpcodesReceived"  
 ::= { dot3ControlEntry 3 }

dot3PauseTable OBJECT-TYPE

SYNTAX SEQUENCE OF Dot3PauseEntry  
MAX-ACCESS not-accessible  
STATUS current  
DESCRIPTION "A table of descriptive and status information about the MAC Control PAUSE function on the Ethernet-like interfaces attached to a particular system. There will be one row in this table for each Ethernet-like interface in the system which supports the MAC Control PAUSE function (i.e., the 'pause' bit in the corresponding instance of dot3ControlFunctionsSupported is set). If some, but not all, of the Ethernet-like interfaces in the system implement the MAC Control PAUSE function (for example, if some interfaces only support half-duplex), there will be fewer rows in this table than in the dot3StatsTable."  
 ::= { ieee8023etherMIBObjects 10 }

dot3PauseEntry OBJECT-TYPE

SYNTAX Dot3PauseEntry  
MAX-ACCESS not-accessible  
STATUS current  
DESCRIPTION "An entry in the table, containing information about the MAC Control PAUSE function on a single Ethernet-like interface."  
INDEX { dot3StatsIndex }  
 ::= { dot3PauseTable 1 }

Dot3PauseEntry ::=

```
SEQUENCE {
    dot3PauseAdminMode          INTEGER,
    dot3PauseOperMode          INTEGER,
    dot3InPauseFrames           Counter32,
    dot3OutPauseFrames          Counter32,
    dot3HCInPauseFrames         Counter64,
    dot3HCOutPauseFrames        Counter64
}
```

dot3PauseAdminMode OBJECT-TYPE

SYNTAX INTEGER {  
 disabled(1),  
 enabledXmit(2),  
 enabledRcv(3),  
 enabledXmitAndRcv(4)  
}

```

MAX-ACCESS read-write
STATUS current
DESCRIPTION "This object is used to configure the default
administrative PAUSE mode for this interface.

```

This object represents the administratively-configured PAUSE mode for this interface. If Auto-Negotiation is not enabled or is not implemented for the active MAU attached to this interface, the value of this object determines the operational PAUSE mode of the interface whenever it is operating in full-duplex mode. In this case, a set to this object will force the interface into the specified mode.

If Auto-Negotiation is implemented and enabled for the MAU attached to this interface, the PAUSE mode for this interface is determined by Auto-Negotiation, and the value of this object denotes the mode to which the interface will automatically revert if/when Auto-Negotiation is later disabled. Note that when Auto-Negotiation is running, administrative control of the PAUSE mode may be accomplished using the ifMauAutoNegCapAdvertisedBits object in the MAU-MIB module.

Note that the value of this object is ignored when the interface is not operating in full-duplex mode.

An attempt to set this object to 'enabledXmit(2)' or 'enabledRcv(3)' will fail on interfaces that do not support operation at greater than 100 Mb/s."

```
 ::= { dot3PauseEntry 1 }
```

```
dot3PauseOperMode OBJECT-TYPE
```

```

SYNTAX INTEGER {
    disabled(1),
    enabledXmit(2),
    enabledRcv(3),
    enabledXmitAndRcv(4)
}

```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION "This object reflects the PAUSE mode currently
```

in use on this interface, as determined by either (1) the result of the Auto-Negotiation function or (2) if Auto-Negotiation is not enabled or is not implemented for the active MAU attached to this interface, by the value of dot3PauseAdminMode. Interfaces operating at 100 Mb/s or less will never return 'enabledXmit(2)' or 'enabledRcv(3)'. Interfaces operating in half-duplex mode will always return

```

        'disabled(1)'. Interfaces on which
        Auto-Negotiation is enabled but not yet
        completed should return the value
        'disabled(1)'."
 ::= { dot3PauseEntry 2 }

```

dot3InPauseFrames OBJECT-TYPE

```

SYNTAX      Counter32
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION "A count of MAC Control frames received on this
            interface with an opcode indicating the PAUSE
            operation.

            This counter does not increment when the
            interface is operating in half-duplex mode.

            For interfaces operating at 10 Gb/s, this
            counter can roll over in less than 5 minutes if
            it is incrementing at its maximum rate. Since
            that amount of time could be less than a
            management station's poll cycle time, in order
            to avoid a loss of information, a management
            station is advised to poll the
            dot3HCInPauseFrames object for 10 Gb/s or
            faster interfaces.

            Discontinuities in the value of this counter can
            occur at re-initialization of the management
            system, and at other times as indicated by the
            value of ifCounterDiscontinuityTime."
REFERENCE   "IEEE Std 802.3, 30.3.4.3,
            aPAUSEMACCtrlFramesReceived."
 ::= { dot3PauseEntry 3 }

```

dot3OutPauseFrames OBJECT-TYPE

```

SYNTAX      Counter32
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION "A count of MAC Control frames transmitted on
            this interface with an opcode indicating the
            PAUSE operation.

            This counter does not increment when the
            interface is operating in half-duplex mode.

            For interfaces operating at 10 Gb/s, this
            counter can roll over in less than 5 minutes if
            it is incrementing at its maximum rate. Since
            that amount of time could be less than a
            management station's poll cycle time, in order
            to avoid a loss of information, a management
            station is advised to poll the
            dot3HCOutPauseFrames object for 10 Gb/s or
            faster interfaces.

            Discontinuities in the value of this counter can
            occur at re-initialization of the management

```

```

        system, and at other times as indicated by the
        value of ifCounterDiscontinuityTime."
REFERENCE   "IEEE Std 802.3, 30.3.4.2,
            aPAUSEMACCtrlFramesTransmitted."
 ::= { dot3PauseEntry 4 }

dot3HCInPauseFrames OBJECT-TYPE
    SYNTAX      Counter64
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "A count of MAC Control frames received on this
                interface with an opcode indicating the PAUSE
                operation.

                This counter does not increment when the
                interface is operating in half-duplex mode.

                This counter is a 64-bit version of
                dot3InPauseFrames. It should be used on
                interfaces operating at 10 Gb/s or faster.

                Discontinuities in the value of this counter can
                occur at re-initialization of the management
                system, and at other times as indicated by the
                value of ifCounterDiscontinuityTime."
REFERENCE   "IEEE Std 802.3, 30.3.4.3,
            aPAUSEMACCtrlFramesReceived."
 ::= { dot3PauseEntry 5 }

dot3HCOutPauseFrames OBJECT-TYPE
    SYNTAX      Counter64
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "A count of MAC Control frames transmitted on
                this interface with an opcode indicating the
                PAUSE operation.

                This counter does not increment when the
                interface is operating in half-duplex mode.

                This counter is a 64-bit version of
                dot3OutPauseFrames. It should be used on
                interfaces operating at 10 Gb/s or faster.

                Discontinuities in the value of this counter can
                occur at re-initialization of the management
                system, and at other times as indicated by the
                value of ifCounterDiscontinuityTime."
REFERENCE   "IEEE Std 802.3, 30.3.4.2,
            aPAUSEMACCtrlFramesTransmitted."
 ::= { dot3PauseEntry 6 }

dot3HCStatsTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF Dot3HCStatsEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "A table containing 64-bit versions of error
                counters from the dot3StatsTable. The 32-bit

```

versions of these counters may roll over quite quickly on higher speed ethernet interfaces. The counters that have 64-bit versions in this table are the counters that apply to full-duplex interfaces, since 10 Gb/s and faster Ethernet-like interfaces do not support half-duplex, and very few 1000 Mb/s Ethernet-like interfaces support half-duplex.

Entries in this table are recommended for interfaces capable of operating at 1000 Mb/s or faster, and are required for interfaces capable of operating at 10 Gb/s or faster. Lower speed Ethernet-like interfaces do not need entries in this table, in which case there may be fewer entries in this table than in the dot3StatsTable. However, implementations containing interfaces with a mix of speeds may choose to implement entries in this table for all Ethernet-like interfaces."

```
::= { ieee8023etherMIBObjects 11 }
```

```
dot3HCStatsEntry OBJECT-TYPE
```

```
SYNTAX      Dot3HCStatsEntry
```

```
MAX-ACCESS  not-accessible
```

```
STATUS      current
```

```
DESCRIPTION "An entry containing 64-bit statistics for a single Ethernet-like interface."
```

```
INDEX       { dot3StatsIndex }
```

```
::= { dot3HCStatsTable 1 }
```

```
Dot3HCStatsEntry ::=
```

```
SEQUENCE {
```

```
    dot3HCStatsAlignmentErrors      Counter64,
```

```
    dot3HCStatsFCSErrors             Counter64,
```

```
    dot3HCStatsInternalMacTransmitErrors Counter64,
```

```
    dot3HCStatsFrameTooLongs        Counter64,
```

```
    dot3HCStatsInternalMacReceiveErrors Counter64,
```

```
    dot3HCStatsSymbolErrors         Counter64
```

```
}
```

```
dot3HCStatsAlignmentErrors OBJECT-TYPE
```

```
SYNTAX      Counter64
```

```
MAX-ACCESS  read-only
```

```
STATUS      current
```

```
DESCRIPTION "A count of frames received on a particular interface that are not an integral number of octets in length and do not pass the FCS check.
```

The count represented by an instance of this object is incremented when the alignmentError status is returned by the MAC service to the LLC (or other MAC user). Received frames for which multiple error conditions pertain are, according to the conventions of IEEE 802.3 Layer Management, counted exclusively according to the error status presented to the LLC.

This counter does not increment for group

encoding schemes greater than 4 bits per group.

This counter is a 64-bit version of dot3StatsAlignmentErrors. It should be used on interfaces operating at 10 Gb/s or faster.

Discontinuities in the value of this counter can occur at re-initialization of the management

system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.7,  
aAlignmentErrors"

::= { dot3HCStatsEntry 1 }

dot3HCStatsFCSErrors OBJECT-TYPE

SYNTAX Counter64

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of frames received on a particular interface that are an integral number of octets in length but do not pass the FCS check. This count does not include frames received with frame-too-long or frame-too-short error.

The count represented by an instance of this object is incremented when the frameCheckError status is returned by the MAC service to the LLC (or other MAC user). Received frames for which multiple error conditions pertain are, according to the conventions of IEEE 802.3 Layer Management, counted exclusively according to the error status presented to the LLC.

Note: Coding errors detected by the physical layer for speeds above 10 Mb/s will cause the frame to fail the FCS check.

This counter is a 64-bit version of dot3StatsFCSErrors. It should be used on interfaces operating at 10 Gb/s or faster.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.6,  
aFrameCheckSequenceErrors."

::= { dot3HCStatsEntry 2 }

dot3HCStatsInternalMacTransmitErrors OBJECT-TYPE

SYNTAX Counter64

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of frames for which transmission on a particular interface fails due to an internal MAC sublayer transmit error. A frame is only

counted by an instance of this object if it is

not counted by the corresponding instance of either the dot3StatsLateCollisions object, the dot3StatsExcessiveCollisions object, or the dot3StatsCarrierSenseErrors object.

The precise meaning of the count represented by an instance of this object is implementation-specific. In particular, an instance of this object may represent a count of transmission errors on a particular interface that are not otherwise counted.

This counter is a 64-bit version of dot3StatsInternalMacTransmitErrors. It should be used on interfaces operating at 10 Gb/s or faster.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.12,  
aFramesLostDueToIntMACXmitError."  
::= { dot3HCStatsEntry 3 }

dot3HCStatsFrameTooLongs OBJECT-TYPE

SYNTAX Counter64  
MAX-ACCESS read-only  
STATUS current  
DESCRIPTION "A count of frames received on a particular interface that exceed the maximum permitted frame size.

The count represented by an instance of this object is incremented when the frameTooLong status is returned by the MAC service to the LLC (or other MAC user). Received frames for which multiple error conditions pertain are, according to the conventions of IEEE 802.3 Layer Management, counted exclusively according to the error status presented to the LLC.

This counter is a 64-bit version of dot3StatsFrameTooLongs. It should be used on interfaces operating at 10 Gb/s or faster.

Discontinuities in the value of this counter can

occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.25,  
aFrameTooLongErrors."  
::= { dot3HCStatsEntry 4 }

dot3HCStatsInternalMacReceiveErrors OBJECT-TYPE

SYNTAX Counter64  
MAX-ACCESS read-only  
STATUS current

DESCRIPTION "A count of frames for which reception on a particular interface fails due to an internal MAC sublayer receive error. A frame is only counted by an instance of this object if it is not counted by the corresponding instance of either the dot3StatsFrameTooLongs object, the dot3StatsAlignmentErrors object, or the dot3StatsFCSErrors object.

The precise meaning of the count represented by an instance of this object is implementation-specific. In particular, an instance of this object may represent a count of receive errors on a particular interface that are not otherwise counted.

This counter is a 64-bit version of dot3StatsInternalMacReceiveErrors. It should be used on interfaces operating at 10 Gb/s or faster.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.1.1.15,  
aFramesLostDueToIntMACRcvError."  
 ::= { dot3HCStatsEntry 5 }

dot3HCStatsSymbolErrors OBJECT-TYPE

SYNTAX Counter64

MAX-ACCESS read-only

STATUS current

DESCRIPTION "For an interface operating at 100 Mb/s, the number of times there was an invalid data symbol when a valid carrier was present.

For an interface operating in half-duplex mode at 1000 Mb/s, the number of times the receiving media is non-idle (a carrier event) for a period of time equal to or greater than slotTime, and during which there was at least one occurrence of an event that causes the PHY to indicate 'Data reception error' or 'carrier extend error' on the GMII.

For an interface operating in full-duplex mode at 1000 Mb/s, the number of times the receiving media is non-idle (a carrier event) for a period of time equal to or greater than minFrameSize, and during which there was at least one occurrence of an event that causes the PHY to indicate 'Data reception error' on the GMII.

For an interface operating at 10 Gb/s, the number of times the receiving media is non-idle (a carrier event) for a period of time equal to or greater than minFrameSize, and during which

there was at least one occurrence of an event that causes the PHY to indicate 'Receive Error' on the XGMII.

The count represented by an instance of this object is incremented at most once per carrier event, even if multiple symbol errors occur during the carrier event. This count does not increment if a collision is present.

This counter is a 64-bit version of dot3StatsSymbolErrors. It should be used on interfaces operating at 10 Gb/s or faster.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.3.2.1.5,  
aSymbolErrorDuringCarrier."

::= { dot3HCStatsEntry 6 }

-- { ieee8023etherMIBObjects 6 }, the dot3ChipSets tree,  
-- is defined in [RFC2666]

-- Conformance statements

etherConformance OBJECT IDENTIFIER ::= { ieee8023etherMIB 2 }

etherGroups OBJECT IDENTIFIER ::= { etherConformance 1 }

etherCompliances OBJECT IDENTIFIER ::= { etherConformance 2 }

-- Compliance statements

dot3Compliance2 MODULE-COMPLIANCE

STATUS current

DESCRIPTION "The compliance statement for managed network entities which have Ethernet-like network interfaces.

Note that compliance with this MIB module requires compliance with the ifCompliance3 MODULE-COMPLIANCE statement of the IF-MIB (IETF RFC 2863). In addition, compliance with this MIB module requires compliance with the mauModIfCompl3 MODULE-COMPLIANCE statement of the MAU-MIB module defined in Clause 13."

MODULE -- this module

MANDATORY-GROUPS { etherStatsBaseGroup2 }

GROUP etherDuplexGroup

DESCRIPTION "This group is mandatory for all Ethernet-like network interfaces which are capable of operating in full-duplex mode. It is highly recommended for all Ethernet-like network interfaces."

GROUP etherRateControlGroup  
DESCRIPTION "This group is mandatory for all Ethernet-like network interfaces which are capable of operating at speeds faster than 1000 Mb/s. It is highly recommended for all Ethernet-like network interfaces."

GROUP etherStatsLowSpeedGroup  
DESCRIPTION "This group is mandatory for all Ethernet-like network interfaces which are capable of operating at 10 Mb/s or slower in half-duplex mode."

GROUP etherStatsHighSpeedGroup  
DESCRIPTION "This group is mandatory for all Ethernet-like network interfaces which are capable of operating at 100 Mb/s or faster."

GROUP etherStatsHalfDuplexGroup  
DESCRIPTION "This group is mandatory for all Ethernet-like network interfaces which are capable of operating in half-duplex mode."

GROUP etherHCStatsGroup  
DESCRIPTION "This group is mandatory for all Ethernet-like network interfaces which are capable of operating at 10 Gb/s or faster. It is recommended for all Ethernet-like network interfaces which are capable of operating at 1000 Mb/s or faster."

GROUP etherControlGroup  
DESCRIPTION "This group is mandatory for all Ethernet-like network interfaces that support the MAC Control sublayer."

GROUP etherHCControlGroup  
DESCRIPTION "This group is mandatory for all Ethernet-like network interfaces that support the MAC Control sublayer and are capable of operating at 10 Gb/s or faster."

GROUP etherControlPauseGroup  
DESCRIPTION "This group is mandatory for all Ethernet-like network interfaces that support the MAC Control PAUSE function."

GROUP etherHCControlPauseGroup  
DESCRIPTION "This group is mandatory for all Ethernet-like network interfaces that support the MAC Control PAUSE function and are capable of operating at 10 Gb/s or faster."

GROUP etherCollisionTableGroup  
DESCRIPTION "This group is optional. It is appropriate for all Ethernet-like network interfaces which are capable of operating in

```

        half-duplex mode and have the necessary
        metering. Implementation in systems with
        such interfaces is highly recommended."
 ::= { etherCompliances 1 }

-- units of conformance

etherCollisionTableGroup OBJECT-GROUP
  OBJECTS      { dot3CollFrequencies
                }
  STATUS       current
  DESCRIPTION  "A collection of objects providing a histogram
                of packets successfully transmitted after
                experiencing exactly N collisions."
 ::= { etherGroups 1 }

etherStatsLowSpeedGroup OBJECT-GROUP
  OBJECTS      { dot3StatsSQETestErrors }
  STATUS       current
  DESCRIPTION  "A collection of objects providing information
                applicable to Ethernet-like network interfaces
                capable of operating at 10 Mb/s or slower in
                half-duplex mode."
 ::= { etherGroups 2 }

etherStatsHighSpeedGroup OBJECT-GROUP
  OBJECTS      { dot3StatsSymbolErrors }
  STATUS       current
  DESCRIPTION  "A collection of objects providing information
                applicable to Ethernet-like network interfaces
                capable of operating at 100 Mb/s or faster."
 ::= { etherGroups 3 }

etherDuplexGroup OBJECT-GROUP
  OBJECTS      { dot3StatsDuplexStatus }
  STATUS       current
  DESCRIPTION  "A collection of objects providing information
                about the duplex mode of an Ethernet-like
                network interface."
 ::= { etherGroups 4 }

etherControlGroup OBJECT-GROUP
  OBJECTS      { dot3ControlFunctionsSupported,
                dot3ControlInUnknownOpcodes
                }
  STATUS       current
  DESCRIPTION  "A collection of objects providing information
                about the MAC Control sublayer on Ethernet-like
                network interfaces."
 ::= { etherGroups 5 }

etherControlPauseGroup OBJECT-GROUP
  OBJECTS      { dot3PauseAdminMode,
                dot3PauseOperMode,
                dot3InPauseFrames,
                dot3OutPauseFrames
                }
  STATUS       current
  DESCRIPTION  "A collection of objects providing information

```

```

        about and control of the MAC Control PAUSE
        function on Ethernet-like network interfaces."
 ::= { etherGroups 6 }

etherStatsBaseGroup2 OBJECT-GROUP
  OBJECTS      { dot3StatsAlignmentErrors,
                  dot3StatsFCSErrors,
                  dot3StatsInternalMacTransmitErrors,
                  dot3StatsFrameTooLongs,
                  dot3StatsInternalMacReceiveErrors,
                  dot3StatsMaxFrameLength
                }
  STATUS       current
  DESCRIPTION  "A collection of objects providing information
                applicable to all Ethernet-like network
                interfaces."
 ::= { etherGroups 7 }

etherStatsHalfDuplexGroup OBJECT-GROUP
  OBJECTS      { dot3StatsSingleCollisionFrames,
                  dot3StatsMultipleCollisionFrames,
                  dot3StatsDeferredTransmissions,
                  dot3StatsLateCollisions,
                  dot3StatsExcessiveCollisions,
                  dot3StatsCarrierSenseErrors
                }
  STATUS       current
  DESCRIPTION  "A collection of objects providing information
                applicable only to half-duplex Ethernet-like
                network interfaces."
 ::= { etherGroups 8 }

etherHCStatsGroup OBJECT-GROUP
  OBJECTS      { dot3HCStatsAlignmentErrors,
                  dot3HCStatsFCSErrors,
                  dot3HCStatsInternalMacTransmitErrors,
                  dot3HCStatsFrameTooLongs,
                  dot3HCStatsInternalMacReceiveErrors,
                  dot3HCStatsSymbolErrors
                }
  STATUS       current
  DESCRIPTION  "A collection of objects providing high-capacity
                statistics applicable to higher-speed
                Ethernet-like network interfaces."
 ::= { etherGroups 9 }

etherHCControlGroup OBJECT-GROUP
  OBJECTS      { dot3HCControlInUnknownOpcodes }
  STATUS       current
  DESCRIPTION  "A collection of objects providing high-capacity
                statistics for the MAC Control sublayer on
                higher-speed Ethernet-like network interfaces."
 ::= { etherGroups 10 }

etherHCControlPauseGroup OBJECT-GROUP
  OBJECTS      { dot3HCInPauseFrames,
                  dot3HCOutPauseFrames
                }

```

```
STATUS      current
DESCRIPTION "A collection of objects providing high-capacity
            statistics for the MAC Control PAUSE function on
            higher-speed Ethernet-like network interfaces."
 ::= { etherGroups 11 }
```

```
etherRateControlGroup OBJECT-GROUP
OBJECTS      { dot3StatsRateControlAbility,
               dot3StatsRateControlStatus
             }
STATUS      current
DESCRIPTION "A collection of objects providing information
            about the Rate Control function on Ethernet-like
            interfaces."
 ::= { etherGroups 12 }
```

```
END
```

## 11. Ethernet in the First Mile copper (EFMCu) interfaces MIB module

### 11.1 Introduction

Ethernet-like interfaces have been defined in IEEE Std 802.3 known as Ethernet in the First Mile (EFM). In particular, 2BASE-TL and 10PASS-TS physical interfaces (PHYs), defined over voice-grade copper pairs, have been specified for the long and short reach, respectively. These interfaces, collectively called EFM Copper (EFMCu), are based on single-pair high-speed digital subscriber line (SHDSL, see ITU-T G.991.2) and very high-speed digital subscriber line (VDSL, see ITU-T G.993.1) technology, supporting optional physical medium entity (PME) aggregation (a.k.a. multi-pair bonding) with variable rates.

The 2BASE-TL PHY is capable of providing at least 2 Mb/s over a 2700 m long single copper pair with a mean bit error ratio (BER) of  $10^{-7}$  (using 5 dB target noise margin).

The 10PASS-TS PHY is capable of providing at least 10 Mb/s over a 750 m long single copper pair with a mean BER of  $10^{-7}$  (using 6 dB target noise margin). This clause defines a Management Information Base (MIB) module for use with SNMP to manage EFMCu interfaces. In addition, a MIB module is defined describing the cross-connect capability of a stacked interface.

### 11.2 Relation to other MIB modules

This subclause outlines the relationship of the MIB modules defined in this clause with other MIB modules described in other clauses of this standard, or the relevant RFCs. Specifically, the Interfaces Group MIB (IF-MIB), Ethernet-Like (IEEE8023-EtherLike-MIB), MAU (MAU-MIB), SHDSL (HDSL2-SHDSL-LINE-MIB), and VDSL (VDSL-LINE-EXT-MCM-MIB) modules are discussed.

#### 11.2.1 Relation to Interfaces Group MIB module

2BASE-TL and 10PASS-TS PHYs specified in the EFM-CU-MIB module are stacked (a.k.a. aggregated or bonded) Ethernet interfaces and as such are managed using generic interface management objects defined in the IF-MIB defined in IETF RFC 2863.

The stack management (i.e., actual connection of the sublayers to the top-layer interface) is done via the `ifStackTable`, as defined in the IF-MIB defined in IETF RFC 2863, and its inverse `ifInvStackTable`, as defined in the IF-INVERTED-STACK-MIB defined in IETF RFC 2864.

The new tables `ifCapStackTable` and its inverse `ifInvCapStackTable` defined in the IF-CAP-STACK-MIB module below, extend the stack management with an ability to describe possible connections or cross-connect capability, when a flexible cross-connect matrix is present between the interface layers.

##### 11.2.1.1 Layering model

An EFMCu interface can aggregate up to 32 physical medium entity (PME) sublayer devices (modems), using the so-called PME aggregation function (PAF).


A generic EFMCu device can have a number of physical coding sublayer (PCS) ports, each connected to a media access controller (MAC) via a media independent interface (MII) at the upper layer, and cross-connected to a number of underlying PMEs, with a single PCS per PME relationship. See 61.1 of IEEE Std 802.3 for more details.

Each PME in the aggregated EFM<sub>Cu</sub> port is represented in the Interface table (ifTable) as a separate interface with ifType of shdsl(169) for 2BASE-TL or vdsl(97) for 10PASS-TS. The ifType values are defined in [IANAifType-MIB].

ifSpeed for each PME shall return the actual data bitrate of the active PME (e.g., for 2BaseTL PMEs it is a multiple of 64 kb/s). A zero value shall be returned when the PME is Initializing or Down.


The ifSpeed of the PCS is the sum of the current operating data rates of all PMEs in the aggregation group, without the 64/65-octet encapsulation overhead and PAF overhead, but accounting for the inter-frame gaps (IFGs).

When using the stated definition of ifSpeed for the PCS, there would be no frame loss in the configuration shown in Figure 11–1 (the test-sets are configured to generate 100% of back-to-back traffic, i.e., minimal IFG, at 10 Mb/s or 100 Mb/s, with min and max frame sizes; the EFM interfaces are aggregated to achieve the shown speed).

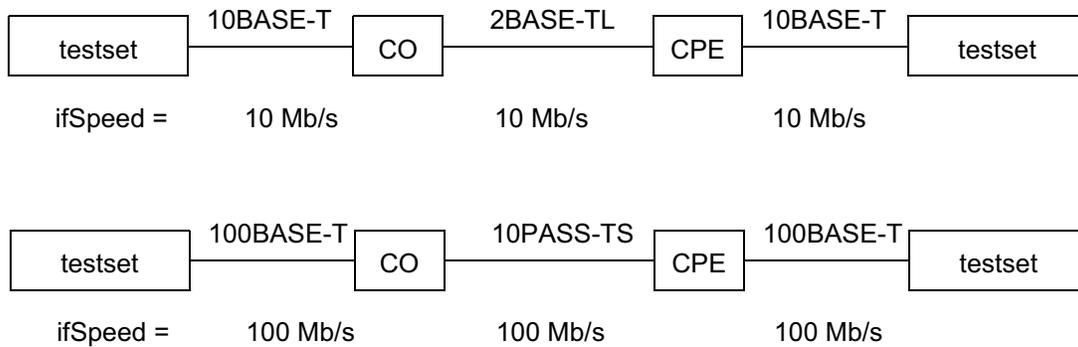

**Figure 11–1—Example configuration with no frame loss**

Figure 11–2 shows the IEEE 802.3 layering diagram and corresponding use of ifTable and ifMauTable.

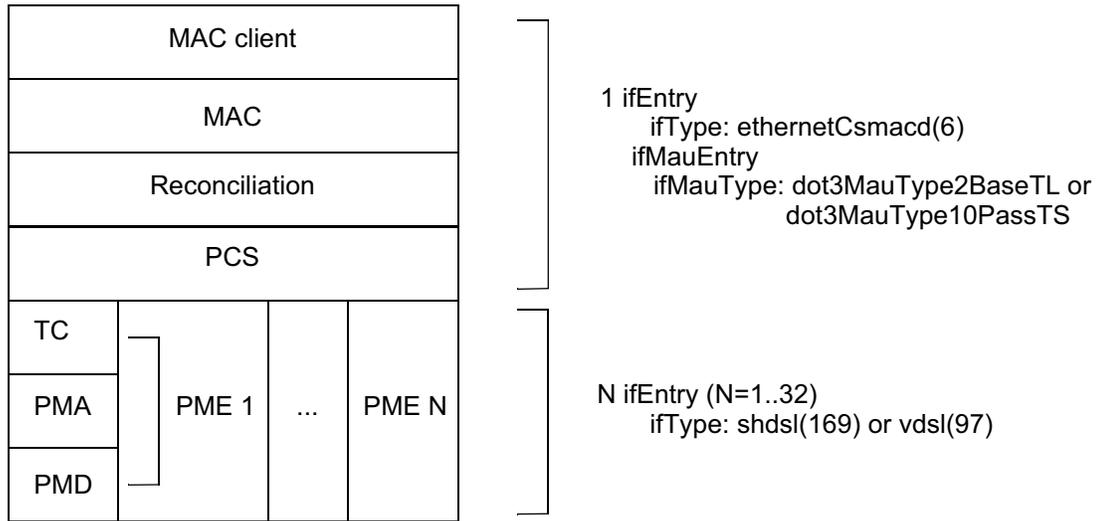

MAC = Media Access Control  
 PCS = Physical Coding Sublayer  
 TC = Transmission Convergence

PMA = Physical Medium Attachment  
 PMD = Physical Medium Dependent  
 PME = Physical Medium Entity

**Figure 11–2—Use of ifTable and ifMauTable for EFMCu ports**

The ifStackTable is indexed by the ifIndex values of the aggregated EFMCu port (PCS) and the PMEs connected to it. ifStackTable allows a Network Management application to determine which PMEs are connected to a particular PCS and change connections (if supported by the application). The ifInvStackTable, being an inverted version of the ifStackTable, provides an efficient means for a Network Management application to read a subset of the ifStackTable and thereby determine which PCS runs on top of a particular PME.

A new table ifCapStackTable, defined in the IF-CAP-STACK-MIB module, specifies for each higher-layer interface (e.g., PCS port) a list of lower-layer interfaces (e.g., PMEs), which can possibly be cross-connected to that higher-layer interface, determined by the cross-connect capability of the device. This table, modeled after ifStackTable, is read-only, reflecting current cross-connect capability of stacked interface, which can be dynamic in some implementations (e.g., if PMEs are located on a pluggable module and the module is pulled out). Note that PME availability per PCS, described by ifCapStackTable, can be constrained by other parameters, for example, by aggregation capacity of a PCS or by the PME in question being already connected to another PCS. So, in order to ensure that a particular PME can be connected to the PCS, all respective parameters (e.g., ifCapStackTable, ifStackTable, and efmCuPAFCapacity) shall be inspected.

The ifInvCapStackTable, also defined in the IF-CAP-STACK-MIB module, describes which higher-layer interfaces (e.g., PCS ports) can possibly be connected to a particular lower-layer interface (e.g., PME), providing an inverted mapping of the ifCapStackTable. While it contains no additional information beyond that already contained in the ifCapStackTable, the ifInvCapStackTable has the ifIndex values in its INDEX clause in the reverse order, i.e., the lower-layer interface first, and the higher-layer interface second, providing an efficient means for a Network Management application to read a subset of the ifCapStackTable and thereby determine which interfaces can be connected to run on top of a particular interface.

### 11.2.1.2 PME aggregation function (PAF)

The PME aggregation function (PAF) allows a number of PMEs to be aggregated onto a PCS port, by fragmenting the Ethernet frames, transmitting the fragments over multiple PMEs, and assembling the original frames at the remote port. PAF is optional, meaning that a device with a single PME may perform fragmentation and re-assembly if this function is supported by the device. Note that the agent is required to report on the PAF capability for all EFM-Cu ports (2BASE-TL and 10PASS-TS).

The EFM-CU-MIB module allows a network management application to query the PAF capability and enable/disable it if supported. Note that enabling PAF effectively turns on fragmentation and re-assembly, even on a single-PME port.

### 11.2.1.3 Discovery operation

The EFM-Cu ports may optionally support discovery operation, whereby PMEs, during initialization, exchange information about their respective aggregation groups (PCS). This information can then be used to detect copper misconnections or for an automatic assignment of the local PMEs into aggregation groups instead of a fixed pre-configuration.

The MIB modules defined in this clause allow a network management application to control the EFM discovery mechanism and query its results. Note that the discovery mechanism can work only if PAF is supported and enabled.

Two tables are used by the EFM discovery mechanism: ifStackTable and ifCapStackTable. The following pseudo-code gives an example of the discovery and automatic PME assignment for a generic PAF-enabled multi-PCS EFM-Cu device, located at central office (CO), using objects defined in these MIB modules and in the IF-MIB. (Note that automatic PME assignment is only shown here for the purposes of the example. Fixed PME pre-assignment, manual assignment, or auto-assignment using an alternative internal algorithm may be chosen by a particular implementation.)

```
// Go over all PCS ports in the CO device
FOREACH pcs[i] IN CO_device
{ // Perform discovery and auto-assignment only on PAF enabled ports
  // with room for more PMEs
  IF ( pcs[i].PAFSupported AND pcs[i].NumPMEs < pcs[i].PAFCapacity )
  { // Assign a unique 6-octet local discovery code to the PCS
    // e.g., MAC address
    dc = pcs[i].DiscoveryCode = MAC[i];
    // Go over all disconnected PMEs, which can
    // potentially be connected to the PCS
    FOREACH pme[j] IN ifCapStackTable[pcs[i]] AND
      NOT IN ifStackTable[pcs[i]] // not connected
    { // Try to grab the remote RT_device, by writing the value
      // of the local 6-octet discovery code to the remote
      // discovery code register (via handshake mechanism).
      // This operation is atomic Set-if-Clear action, i.e., it
      // would succeed only if the remote discovery register was
      // zero. Read the remote discovery code register via Get
      // operation to see if the RT_device, attached via the PME
      // is indeed marked as being the CO_device peer.
      pme[j].RemoteDiscoveryCode = dc; // Set-if-Clear
      r = pme[j].RemoteDiscoveryCode; // Get
      IF ( r == dc AND pcs[i].NumPMEs < pcs[i].PAFCapacity )
      { // Remote RT_device connected via PME[j] is/was a peer
```



the line is too high, that ‘training’ process may fail to achieve a specific target rate with required characteristics.

The ifAdminStatus object from the IF-MIB controls the desired state of a PCS with all the PME's connected to it or of an individual PME port. Setting this object to ‘up’ instructs a particular PCS or PME to start the initialization process, which may take tens of seconds for EFMcu ports, especially if PAF is involved. The ifOperStatus object shows the operational state of an interface (extended by the ifMauMediaAvailable object from the MAU-MIB module for PCS and efmCuPmeOperStatus defined in the EFM-CU-MIB module for PME interfaces).

A disconnected PME may be initialized by changing the ifAdminState from ‘down’ to ‘up’. Changing the ifAdminState to ‘up’ on the PCS initializes all PME's connected to that particular PCS. Note that in case of PAF some interfaces may fail to initialize while others succeed. The PCS is considered operationally ‘up’ if at least one PME aggregated by its PAF is operationally ‘up’. When all PME's connected to the PCS are ‘down’, the PCS shall be considered operationally ‘lowerLayerDown’. The PCS shall be considered operationally ‘notPresent’ if it is not connected to any PME. The PCS/PME interface shall remain operationally ‘down’ during initialization.

The efmCuPmeOperStatus defined in the EFM-CU-MIB module expands PME's ifOperStatus value of ‘down’ to ‘downReady’, ‘downNotReady’, and ‘init’ values, indicating various EFMcu PME-specific states.

### 11.2.1.5 Usage of ifTable

Both PME and PCS interfaces of the EFMcu PHY are managed using interface-specific management objects defined in the EFM-CU-MIB module and generic interface objects from the ifTable of IF-MIB, with all management table entries referenced by the interface index ifIndex.

Table 11–1 summarizes EFMcu-specific interpretations for some of the ifTable objects specified in the mandatory ifGeneralInformationGroup.

**Table 11–1—EFMcu interpretation of IF-MIB objects**

IF-MIB object	EFMcu interpretation
ifIndex	Interface index. Each PME and each PCS in the EFMcu PHY shall have a unique index, as there are some PCS and PME-specific attributes accessible only on the PCS or PME level.
ifType	ethernetCsmacd(6) for PCS, shdsl(169) for 2BASE-TL PME, vdsl(97) for 10PASS-TS PME. Operating data rate for the PME. For the PCS, it is the sum of the current operating data rates of all PME's in the aggregation group, without the 64/65-octet encapsulation overhead and PAF overhead, but accounting for the Inter-Frame Gaps (IFGs).
ifSpeed	Setting this object to ‘up’ instructs a particular PCS (with all PME's connected to it) or PME to start initialization process.
ifAdminStatus	Setting this object to ‘up’ instructs a particular PCS (with all PME's connected to it) or PME to start initialization process.
ifOperStatus	efmCuPmeOperStatus supplements the ‘down’ value of ifOperStatus for PME's.

### 11.2.2 Relation to SHDSL MIB module

G.SHDSL.bis modems, similar to PMEs comprising a 2BASE-TL port, are described in the HDSL2-SHDSL-LINE-MIB module defined in IETF RFC 4319. Note that not all attributes of G.SHDSL modems reflected in the HDSL2-SHDSL-LINE-MIB module have adequate management objects (Clause 30 attributes and Clause 45 registers) in IEEE Std 802.3.

Because of these differences and for the purposes of simplicity, unification of attributes common to both 2BASE-TL and 10PASS-TS PMEs, and name consistency (e.g., prefixing the 2BASE-TL PME related objects with 'efmCuPme2B' instead of 'hdsl2shdsl'), it was decided not to reference HDSL2-SHDSL-LINE-MIB objects, but define all the relevant objects in the EFM-CU-MIB module.

However, if some functionality not available in the EFM-CU-MIB module is required and supported by the PME, e.g., performance monitoring, relevant HDSL2-SHDSL-LINE-MIB groups may be included and applied for PMEs of 2BASE-TL subtype.

### 11.2.3 Relation to VDSL MIB module

VDSL modems, similar to the PME(s) comprising a 10PASS-TS port, are described in the VDSL-LINE-EXT-MCM-MIB module defined in IETF RFC 4070. Note that not all attributes of VDSL modems reflected in the VDSL-LINE-EXT-MCM-MIB module have adequate management objects (Clause 30 attributes and Clause 45 registers) in IEEE Std 802.3.

Because of these differences and for the purposes of simplicity, unification of attributes common to both 2BASE-TL and 10PASS-TS PMEs, and name consistency, it was decided not to reference VDSL-LINE-EXT-MCM-MIB objects, but define all the relevant objects in the EFM-CU-MIB module.

However, if some functionality not available in the EFM-CU-MIB module is required and supported by the PME, relevant VDSL-LINE-EXT-MCM-MIB groups may be included and applied for PMEs of 10PASS-TS subtype.

### 11.2.4 Relation to Ethernet-Like and MAU MIB modules

An agent implementing the objects defined in this clause shall also implement the objects required by the Ethernet-like interface MIB module defined in Clause 10 and the objects required by the MAU MIB module defined in Clause 13.

Two new values of ifMauType (OBJECT-IDENTITIES of dot3MauType) and corresponding bit definitions of ifMauTypeListBits (IANAifMauTypeListBits) have been defined in the IANA-MAU-MIB module for EFM-CU MAUs:

- dot3MauType2BaseTL and b2BaseTL, for 2BASE-TL MAU
- dot3MauType10PassTS and b10PassTS, for 10PASS-TS MAU

Additionally, the IANA-MAU-MIB module defines two new values of ifMauMediaAvailable, specifically for EFM-CU ports: availableReduced and ready (in textual convention IANAifMauMediaAvailable). Due to the PME aggregation, the EFM-CU interpretation of some possible ifMauMediaAvailable values differs from other MAUs as follows:

- unknown: the EFM-CU interface (PCS with connected PMEs) is Initializing
- ready: the interface is Down, at least one PME in the aggregation group (all PMEs connected to the PCS) is ready for handshake
- available: the interface is Up, all PMEs in the aggregation group are up

- notAvailable: the interface is Down, all PME's in the aggregation group are Down, no handshake tones are detected by any PME
- availableReduced: the interface is Up, a link fault is detected at the receive direction by one or more PME's in the aggregation group, but at least one PME is Up
- pmdLinkFault: a link fault is detected at the receive direction by all PME's in the aggregation group

As an Ethernet-like interface, every EFM-Cu port [an ifEntry representing a consolidation of LLC, MAC, and PCS (sub)layers] shall return an ifType of ethernetCsmacd(6). While most of the MAU characteristics are not applicable to the EFM-Cu ports (no Auto-Negotiation, false carriers, or jabber), they shall return an appropriate ifMauType (dot3MauType2BaseTL or dot3mauType10PassTS) in order to direct the management software to look in the EFM-CU-MIB module for the desired information. For example, the information on the particular EFM-Cu flavor that an EFM-Cu port is running is available from efmCuOperSubType, defined in the EFM-CU-MIB module.

Since EFM-Cu PME's are not Ethernet-like interfaces, they cannot be instantiated as MAU interface objects.

## 11.3 MIB structure

### 11.3.1 EFM copper MIB overview

The main management objects defined in the EFM-CU-MIB module are split into two groups:

- efmCuPort—containing objects for configuration, capabilities, status, and notifications, common to all EFM-Cu PHYs.
- efmCuPme—containing objects for configuration, capabilities, status, and notifications of EFM-Cu PME's.

The efmCuPme group in turn contains efmCuPme2B and efmCuPme10P groups, which define PME profiles specific to 2BASE-TL and 10PASS-TS PME's, respectively, as well as PME-specific status information.

### 11.3.2 Interface stack capability MIB overview

The IF-CAP-STACK-MIB module contains two tables:

- ifCapStackTable—containing objects that define possible relationships among the sublayers of an interface with flexible cross-connect (cross-connect capability).
- ifInvCapStackTable—an inverse of the ifCapstackTable.

### 11.3.3 PME profiles

Since a managed node can have a large number of EFM-Cu PHYs, provisioning every parameter on every EFM-Cu PHY may become burdensome. Moreover, most PME's are provisioned identically with the same set of parameters. To simplify the provisioning process, the EFM-CU-MIB module makes use of configuration profiles, similar to the HDSL2-SHDSL-LINE-MIB and VDSL-LINE-EXT-MCM-MIB modules. A profile is a set of parameters, used either for configuration or representation of a PME. The same profile can be shared by multiple PME ports using the same configuration.

The PME profiles are defined in the efmCuPme2BProfileTable and efmCuPme10PProfileTable for 2BASE-TL and 10PASS-TS PME's, respectively. There are 12 predefined standard profiles for 2BASE-TL and 22 standard profiles for 10PASS-TS, defined in IEEE Std 802.3 and dedicated for rapid provisioning of EFM-Cu PHYs in most scenarios. In addition, the EFM-CU-MIB defines two additional predefined profiles for “best-

effort” provisioning of 2BASE-TL PMEs. An ability to define new configuration profiles is also provided to allow for EFM-Cu deployment tailored to specific copper environments and spectral regulations.

A specific configuration or administrative profile is assigned to a specific PME via the `efmCuPmeAdminProfile` object. If `efmCuPmeAdminProfile` is zero, then the `efmCuAdminProfile` object of the PCS port connected to the PME determines the configuration profile (or a list of possible profiles) for that PME. This mechanism allows specifying a common profile for all PMEs connected to the PCS port, with an ability to change individual PME profiles by setting `efmCuPmeAdminProfile` object, which overwrites the profile set by `efmCuAdminProfile`.

A current operating PME profile is pointed to by the `efmCuPmeOperProfile` object. Note that this profile entry can be created automatically to reflect achieved parameters in adaptive (not fixed) initialization.

### 11.3.4 Mapping of IEEE 802.3 managed objects

This subclause contains the mapping between relevant managed objects (attributes) defined in IEEE Std 802.3 Clause 30, and managed objects defined in this clause and in associated MIB modules, i.e., the IF-MIB defined in IETF RFC 2863. Note that the majority of the objects defined in the EFM-CU-MIB module do not have direct counterparts in Clause 30 and instead refer to Clause 45 registers.

**Table 11–2—Mapping of IEEE 802.3 managed objects**

IEEE 802.3 managed object		Corresponding SNMP object
oMAU - Basic Package (Mandatory)	aMAUType	ifMauType (MAU-MIB)
	aMAUTypeList	ifMauTypeListBits (MAU-MIB)
	aMediaAvailable	ifMediaAvailable (MAU-MIB)
oPAF - Basic Package (Mandatory)	aPAFID	ifIndex (IF-MIB)
	aPhyEnd	efmCuPhySide
	aPHYCurrentStatus	efmCuStatus
	aPAFSupported	efmCuPAFSupported

**Table 11–2—Mapping of IEEE 802.3 managed objects (continued)**

IEEE 802.3 managed object	Corresponding SNMP object	
oPAF - PME Aggregation Package (Optional)	aPAFAdminState	efmCuPAFAdminState
	aLocalPAFCapacity	efmCuPAFCapacity
	aLocalPMEAvailable	ifCapStackTable
	aLocalPMEAggregate	ifStackTable (IF-MIB)
	aRemotePAFSupported	efmCuRemotePAFSupported
	aRemotePAFCapacity	efmCuRemotePAFCapacity
	aRemotePMEAggregate	
oPME - 10P/2B Package (Mandatory)	aPMEID	ifIndex (IF-MIB)
	aPMEAdminState aPMEStatus	ifAdminState (IF-MIB) efmCuPmeStatus
	aPMESNRMgn	efmCuPmeSnrMgn
	aTCCodingViolations	efmCuPmeTCCodingErrors
	aTCCRCErrors	efmCuPmeTCCrcErrors
	aProfileSelect	efmCuAdminProfile, efmCuPmeAdminProfile
	aOperatingProfile	efmCuPmeOperProfile
	aPMEFECCorrectedBlocks	efmCuPme10PFECCorrectedBlocks
	aPMEFECCorrectableBlocks	efmCuPme10PFECUncorrectedBlocks

#### 11.4 Security considerations for Ethernet in the First Mile copper interfaces MIB module

There are a number of managed objects defined in the EFM-CU-MIB module that have a MAX-ACCESS clause of read-write or read-create. Most objects are writeable only when the link is Down. Writing to these objects can have potentially disruptive effects on network operation, for example:

- Changing of efmCuPmeAdminSubType may lead to a potential locking of the link, as peer PMEs of the same subtype cannot exchange handshake messages.
- Changing of efmCuPAFAdminState to enabled may lead to a potential locking of the link, if the peer PHY does not support PAF.
- Changing of efmCuPAFDiscoveryCode, before the discovery operation, may lead to a wrongful discovery, for example, when two -O ports are connected to the same multi-PME -R port and both -O ports have the same Discovery register value.
- Changing PCS or PME configuration parameters (e.g., profile of a PCS or PME via efmCuAdminProfile or efmCuPmeAdminProfile) may lead to anything from link quality and rate degradation to a complete link initialization failure, as ability of an EFM-CU port to support a particular configuration depends on the copper environment.
- Activation of a PME can cause a severe degradation of service for another EFM-CU PHY, whose PME(s) may be affected by the cross-talk from the newly activated PME.
- Removal of a PME from an operationally ‘up’ EFM-CU port, aggregating several PMEs, may cause port’s rate degradation.

The user of the EFM-CU-MIB module should therefore be aware that support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations.

The readable objects in the EFM-CU-MIB module (i.e., those with MAX-ACCESS other than not-accessible) may be considered sensitive in some environments since, collectively, they provide information about the performance of network interfaces and can reveal some aspects of their configuration. In particular, since EFM-Cu can be carried over Unshielded Twisted Pair (UTP) voice-grade copper in a bundle with other pairs belonging to another operator/customer, it is theoretically possible to eavesdrop to an EFM-Cu transmission simply by “listening” to a cross-talk from the EFM-Cu pairs, especially if the parameters of the EFM-Cu link in question are known.

In such environments, it is important to control also GET and NOTIFY access to these objects and possibly to encrypt their values when sending them over the network via SNMP.

### 11.5 MIB module definition

An ASCII text version of the MIB definition can be found at the following URL:<sup>18</sup>

[http://www.ieee802.org/3/be/public/mib\\_modules/20110202/802dot3dot1C11mib.txt](http://www.ieee802.org/3/be/public/mib_modules/20110202/802dot3dot1C11mib.txt)

---

<sup>18</sup>Copyright release for MIB modules: Users of this standard may freely reproduce the MIB module contained in this subclause so that it can be used for its intended purpose.



```

IEEE8023-IF-CAP-STACK-MIB DEFINITIONS ::= BEGIN

IMPORTS
    MODULE-IDENTITY, OBJECT-TYPE, org
        FROM SNMPv2-SMI          -- [RFC2578]
    TruthValue
        FROM SNMPv2-TC          -- [RFC2579]
    MODULE-COMPLIANCE, OBJECT-GROUP
        FROM SNMPv2-CONF        -- [RFC2580]
    ifStackGroup2, ifStackHigherLayer, ifStackLowerLayer
        FROM IF-MIB             -- [RFC2863]
    ifInvStackGroup
        FROM IF-INVERTED-STACK-MIB -- [RFC2864]
;

ieee8023ifCapStackMIB MODULE-IDENTITY
    LAST-UPDATED "201102020000Z" -- February 2, 2011
    ORGANIZATION
        "IEEE 802.3 working group"
    CONTACT-INFO
        "WG-URL: http://www.ieee802.org/3/index.html
        WG-EMail: STDS-802-3-MIB@LISTSERV.IEEE.ORG

        Contact: Howard Frazier
        Postal: 3151 Zanker Road
                San Jose, CA 95134
                USA
        Tel:    +1.408.922.8164
        E-mail: hfrazier@broadcom.com"

DESCRIPTION
    "The objects in this MIB module are used to describe
    cross-connect capabilities of stacked (layered) interfaces,
    complementing ifStackTable and ifInvStackTable defined in
    IF-MIB and IF-INVERTED-STACK-MIB, respectively."

REVISION      "201102020000Z" -- February 2, 2011
DESCRIPTION
    "Initial version, based on an earlier version published as RFC 5066."

    ::= { org ieee(111) standards-association-numbers-series-standards(2)
        lan-man-stds(802) ieee802dot3(3) ieee802dot3dot1mibs(1)
        ieee8023efmcb(11) 1}

-- Sections of the module
-- Structured as recommended by [RFC4181], see
-- Appendix D: Suggested OID Layout

ifCapStackObjects      OBJECT IDENTIFIER ::= { ieee8023ifCapStackMIB 1 }

ifCapStackConformance OBJECT IDENTIFIER ::= { ieee8023ifCapStackMIB 2 }

-- Groups in the module

--
-- ifCapStackTable group
--

```

```

ifCapStackTable OBJECT-TYPE
  SYNTAX      SEQUENCE OF IfCapStackEntry
  MAX-ACCESS  not-accessible
  STATUS      current
  DESCRIPTION
    "This table, modeled after ifStackTable from IF-MIB,
    contains information on the possible 'on-top-of'
    relationships between the multiple sub-layers of network
    interfaces (as opposed to actual relationships described in
    ifStackTable). In particular, it contains information on
    which sub-layers may possibly run 'on top of' which other
    sub-layers, as determined by cross-connect capability of the
    device, where each sub-layer corresponds to a conceptual row
    in the ifTable. For example, when the sub-layer with ifIndex
    value x can be connected to run on top of the sub-layer with
    ifIndex value y, then this table contains:

        ifCapStackStatus.x.y=true

    The ifCapStackStatus.x.y row does not exist if it is
    impossible to connect between the sub-layers x and y.

    Note that for most stacked interfaces (e.g., 2BASE-TL)
    there's always at least one higher-level interface (e.g., PCS
    port) for each lower-level interface (e.g., PME) and at
    least one lower-level interface for each higher-level
    interface, that is, there is at least a single row with a
    'true' status for any such existing value of x or y.

    This table is read-only as it describes device capabilities."
  REFERENCE
    "IF-MIB, ifStackTable"
    ::= { ifCapStackObjects 1 }

ifCapStackEntry OBJECT-TYPE
  SYNTAX      IfCapStackEntry
  MAX-ACCESS  not-accessible
  STATUS      current
  DESCRIPTION
    "Information on a particular relationship between two
    sub-layers, specifying that one sub-layer may possibly run
    on 'top' of the other sub-layer. Each sub-layer corresponds
    to a conceptual row in the ifTable (interface index for
    lower and higher layer, respectively)."
  INDEX {
    ifStackHigherLayer,
    ifStackLowerLayer
  }
  ::= { ifCapStackTable 1 }

IfCapStackEntry ::= SEQUENCE {
  ifCapStackStatus      TruthValue
}

ifCapStackStatus OBJECT-TYPE
  SYNTAX      TruthValue
  MAX-ACCESS  read-only
  STATUS      current

```

## DESCRIPTION

"The status of the 'cross-connect capability' relationship between two sub-layers. The following values can be returned:

- true(1) - indicates that the sub-layer interface, identified by the ifStackLowerLayer may be connected to run 'below' the sub-layer interface, identified by the ifStackHigherLayer index.
- false(2) - the sub-layer interfaces cannot be connected temporarily due to unavailability of the interface(s), e.g., one of the interfaces is located on an absent pluggable module.

Note that lower-layer interface availability per higher-layer, indicated by the value of 'true', can be constrained by other parameters, for example, by the aggregation capacity of a higher-layer interface or by the lower-layer interface in question being already connected to another higher-layer interface. In order to ensure that a particular sub-layer can be connected to another sub-layer, all respective objects (e.g., ifCapStackTable, ifStackTable, and efmCuPAFCapacity for EFMcu interfaces) shall be inspected.

This object is read-only, unlike ifStackStatus, as it describes a cross-connect capability."

```
::= { ifCapStackEntry 1 }
```

ifInvCapStackTable OBJECT-TYPE

SYNTAX SEQUENCE OF IfInvCapStackEntry

MAX-ACCESS not-accessible

STATUS current

## DESCRIPTION

"A table containing information on the possible relationships between the multiple sub-layers of network interfaces. This table, modeled after ifInvStackTable from IF-INVERTED-STACK-MIB, is an inverse of the ifCapStackTable defined in this MIB module.

In particular, this table contains information on which sub-layers may run 'underneath' which other sub-layers, where each sub-layer corresponds to a conceptual row in the ifTable. For example, when the sub-layer with ifIndex value x may be connected to run underneath the sub-layer with ifIndex value y, then this table contains:

```
ifInvCapStackStatus.x.y=true
```

This table contains exactly the same number of rows as the ifCapStackTable, but the rows appear in a different order.

This table is read-only as it describes a cross-connect capability."

## REFERENCE

"IF-INVERTED-STACK-MIB, ifInvStackTable"

```
::= { ifCapStackObjects 2 }
```

ifInvCapStackEntry OBJECT-TYPE

SYNTAX IfInvCapStackEntry

```

MAX-ACCESS      not-accessible
STATUS          current
DESCRIPTION
    "Information on a particular relationship between two sub-
    layers, specifying that one sub-layer may run underneath the
    other sub-layer. Each sub-layer corresponds to a conceptual
    row in the ifTable."
INDEX { ifStackLowerLayer, ifStackHigherLayer }
 ::= { ifInvCapStackTable 1 }

IfInvCapStackEntry ::= SEQUENCE {
    ifInvCapStackStatus      TruthValue
}

ifInvCapStackStatus OBJECT-TYPE
    SYNTAX      TruthValue
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The status of the possible 'cross-connect capability'
        relationship between two sub-layers.

        An instance of this object exists for each instance of the
        ifCapStackStatus object, and vice versa. For example, if the
        variable ifCapStackStatus.H.L exists, then the variable
        ifInvCapStackStatus.L.H also exists, and vice versa. In
        addition, the two variables always have the same value.

        The ifInvCapStackStatus object is read-only, as it describes
        a cross-connect capability."
    REFERENCE
        "ifCapStackStatus"
    ::= { ifInvCapStackEntry 1 }

--
-- Conformance Statements
--

ifCapStackGroups      OBJECT IDENTIFIER ::=
    { ifCapStackConformance 1 }

ifCapStackCompliances OBJECT IDENTIFIER ::=
    { ifCapStackConformance 2 }

-- Conformance statements

ifCapStackGroup OBJECT-GROUP
    OBJECTS {
        ifCapStackStatus,
        ifInvCapStackStatus
    }
    STATUS current
    DESCRIPTION
        "A collection of objects providing information on the
        cross-connect capability of multi-layer (stacked) network
        interfaces."
    ::= { ifCapStackGroups 1 }

```

```

-- Compliance statements

ifCapStackCompliance MODULE-COMPLIANCE
  STATUS      current
  DESCRIPTION
    "The compliance statement for SNMP entities, which provide
    information on the cross-connect capability of multi-layer
    (stacked) network interfaces, with flexible cross-connect
    between the sub-layers."

MODULE -- this module
  MANDATORY-GROUPS {
    ifCapStackGroup
  }

  OBJECT      ifCapStackStatus

  SYNTAX      TruthValue { true(1) }
  DESCRIPTION
    "Support for the false(2) value is optional for
    implementations supporting pluggable interfaces."

  OBJECT      ifInvCapStackStatus
  SYNTAX      TruthValue { true(1) }
  DESCRIPTION
    "Support for the false(2) value is optional for
    implementations supporting pluggable interfaces."

MODULE IF-MIB
  MANDATORY-GROUPS {
    ifStackGroup2
  }

MODULE IF-INVERTED-STACK-MIB
  MANDATORY-GROUPS {
    ifInvStackGroup
  }

 ::= { ifCapStackCompliances 1 }
END

IEEE8023-EFM-CU-MIB DEFINITIONS ::= BEGIN

IMPORTS
  MODULE-IDENTITY, OBJECT-TYPE, NOTIFICATION-TYPE, Integer32,
  Unsigned32, Counter32, org
  FROM SNMPv2-SMI          -- [RFC2578]
  TEXTUAL-CONVENTION, TruthValue, RowStatus, PhysAddress
  FROM SNMPv2-TC          -- [RFC2579]
  MODULE-COMPLIANCE, OBJECT-GROUP, NOTIFICATION-GROUP
  FROM SNMPv2-CONF        -- [RFC2580]
  SntpAdminString
  FROM SNMP-FRAMEWORK-MIB -- [RFC3411]
  ifIndex, ifSpeed
  FROM IF-MIB              -- [RFC2863]
;

```

```

ieee8023efmCuMIB MODULE-IDENTITY
  LAST-UPDATED "201102020000Z" -- February 2, 2011
  ORGANIZATION
    "IEEE 802.3 working group"
  CONTACT-INFO
    "WG-URL: http://www.ieee802.org/3/index.html
    WG-EMail: STDS-802-3-MIB@LISTSERV.IEEE.ORG

    Contact: Howard Frazier
    Postal: 3151 Zanker Road
           San Jose, CA 95134
           USA
    Tel:    +1.408.922.8164
    E-mail: hfrazier@broadcom.com"

```

## DESCRIPTION

"The objects in this MIB module are used to manage the Ethernet in the First Mile (EFM) Copper (EFMCu) Interfaces 2BASE-TL and 10PASS-TS, defined in IEEE Std 802.3.

Of particular interest are Clause 61, 'Physical Coding Sublayer (PCS) and common specifications, type 10PASS-TS and type 2BASE-TL', Clause 30, 'Management', Clause 45, 'Management Data Input/Output (MDIO) Interface', Annex 62A, 'PMD profiles for 10PASS-TS' and Annex 63A, 'PMD profiles for 2BASE-TL'."

```
REVISION    "201102020000Z" -- February 2, 2011
```

## DESCRIPTION

"Initial version, based on an earlier version published as RFC 5066."

```

 ::= { org ieee(111) standards-association-numbers-series-standards(2)
       lan-man-stds(802) ieee802dot3(3) ieee802dot3dot1mibs(1)
       ieee8023efmCu(11) 2 }

```

```
-- Sections of the module
```

```
efmCuObjects      OBJECT IDENTIFIER ::= { ieee8023efmCuMIB 1 }
```

```
efmCuConformance OBJECT IDENTIFIER ::= { ieee8023efmCuMIB 2 }
```

```
-- Groups in the module
```

```
efmCuPort         OBJECT IDENTIFIER ::= { efmCuObjects 1 }
```

```
efmCuPme          OBJECT IDENTIFIER ::= { efmCuObjects 2 }
```

```
-- Textual Conventions
```

```
EfmProfileIndex ::= TEXTUAL-CONVENTION
```

```
  DISPLAY-HINT "d"
```

```
  STATUS      current
```

```
  DESCRIPTION
```

"A unique value, greater than zero, for each PME configuration profile in the managed EFMCu port. Values should be assigned contiguously starting from 1. The value for each profile shall remain constant at least from one re-initialization of the entity's network management system to the next re-initialization."

```

SYNTAX      Unsigned32 (1..255)

EfmProfileIndexOrZero ::= TEXTUAL-CONVENTION
  DISPLAY-HINT "d"
  STATUS      current
  DESCRIPTION
    "This textual convention is an extension of the
    EfmProfileIndex convention. The latter defines a greater than
    zero value used to identify a PME profile in the managed EFMCu
    port. This extension permits the additional value of zero.
    The value of zero is object-specific and shall therefore be
    defined as part of the description of any object that uses
    this syntax.
    Examples of the usage of zero value might include situations
    where the current operational profile is unknown."
  SYNTAX      Unsigned32 (0..255)

EfmProfileIndexList ::= TEXTUAL-CONVENTION
  DISPLAY-HINT "1d:"

  STATUS      current
  DESCRIPTION
    "This textual convention represents a list of up to 6
    EfmProfileIndex values, any of which can be chosen for
    configuration of a PME in a managed EFMCu port.
    The EfmProfileIndex textual convention defines a greater than
    zero value used to identify a PME profile.
    The value of this object is a concatenation of zero or
    more (up to 6) octets, where each octet contains an 8-bit
    EfmProfileIndex value.
    A zero-length octet string is object-specific and shall
    therefore be defined as part of the description of any object
    that uses this syntax. Examples of the usage of a zero-length
    value might include situations where an object using this
    textual convention is irrelevant for a specific EFMCu port
    type."
  SYNTAX      OCTET STRING (SIZE(0..6))

EfmTruthValueOrUnknown ::= TEXTUAL-CONVENTION
  STATUS      current
  DESCRIPTION
    "This textual convention is an extension of the TruthValue
    convention. The latter defines a boolean value with possible
    values of true(1) and false(2). This extension permits the
    additional value of unknown(0), which can be returned as the
    result of a GET operation when an exact true or false value
    of the object cannot be determined."
  SYNTAX      INTEGER { unknown(0), true(1), false(2) }

-- Port Notifications Group

efmCuPortNotifications OBJECT IDENTIFIER ::= { efmCuPort 0 }

efmCuLowRateCrossing NOTIFICATION-TYPE
  OBJECTS {
    ifSpeed,
    efmCuThreshLowRate
  }
  STATUS      current

```

## DESCRIPTION

"This notification indicates that the EFMCu port's data rate has reached/dropped below or exceeded the low rate threshold, specified by efmCuThreshLowRate.

This notification may be sent for the -O subtype ports (2BaseTL-O/10PassTS-O) while the port is Up, on the crossing event in both directions: from normal (rate is above the threshold) to low (rate equals the threshold or below it) and from low to normal. This notification is not applicable to the -R subtypes.

A small debouncing period of 2.5 sec, between the detection of the condition and the notification, should be implemented to prevent simultaneous LinkUp/LinkDown and efmCuLowRateCrossing notifications to be sent.

The adaptive nature of the EFMCu technology allows the port to adapt itself to the changes in the copper environment, e.g., an impulse noise, alien crosstalk, or a micro-interruption may temporarily drop one or more PMEs in the aggregation group, causing a rate degradation of the aggregated EFMCu link. The dropped PMEs would then try to re-initialize, possibly at a lower rate than before, adjusting the rate to provide required target SNR margin.

Generation of this notification is controlled by the efmCuLowRateCrossingEnable object."

```
::= { efmCuPortNotifications 1 }
```

```
-- PCS Port group
```

```
efmCuPortConfTable OBJECT-TYPE
```

```
SYNTAX SEQUENCE OF EfmCuPortConfEntry
```

```
MAX-ACCESS not-accessible
```

```
STATUS current
```

```
DESCRIPTION
```

"Table for Configuration of EFMCu 2BASE-TL/10PASS-TS (PCS) Ports. Entries in this table shall be maintained in a persistent manner."

```
::= { efmCuPort 1 }
```

```
efmCuPortConfEntry OBJECT-TYPE
```

```
SYNTAX EfmCuPortConfEntry
```

```
MAX-ACCESS not-accessible
```

```
STATUS current
```

```
DESCRIPTION
```

"An entry in the EFMCu Port Configuration table. Each entry represents an EFMCu port indexed by the ifIndex. Note that an EFMCu PCS port runs on top of a single or multiple PME port(s), which are also indexed by ifIndex."

```
INDEX { ifIndex }
```

```
::= { efmCuPortConfTable 1 }
```

```
EfmCuPortConfEntry ::=
```

```
SEQUENCE {
```

```
efmCuPAFAdminState
```

```
INTEGER,
```

```
efmCuPAFDiscoveryCode
```

```
PhysAddress,
```

```
efmCuAdminProfile
```

```
EfmProfileIndexList,
```

```

        efmCuTargetDataRate      Unsigned32,
        efmCuTargetSnrMgn        Unsigned32,
        efmCuAdaptiveSpectra     TruthValue,
        efmCuThreshLowRate       Unsigned32,
        efmCuLowRateCrossingEnable TruthValue
    }

efmCuPAFAdminState OBJECT-TYPE
    SYNTAX      INTEGER {
        enabled(1),
        disabled(2)
    }
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "Administrative (desired) state of the PAF of the EFMCu port
        (PCS).
        When 'disabled', PME aggregation will not be performed by the
        PCS. No more than a single PME can be assigned to this PCS in
        this case.
        When 'enabled', PAF will be performed by the PCS when the link
        is Up, even on a single attached PME, if PAF is supported.

        PCS ports incapable of supporting PAF shall return a value of
        'disabled'. Attempts to 'enable' such ports shall be
        rejected.

        A PAF 'enabled' port with multiple PMEs assigned cannot be
        'disabled'. Attempts to 'disable' such port shall be
        rejected, until at most one PME is left assigned.

        Changing PAFAdminState is a traffic-disruptive operation and
        as such shall be done when the link is Down. Attempts to
        change this object shall be rejected if the link is Up or
        Initializing.

        This object maps to the Clause 30 attribute aPAFAdminState.

        If a Clause 45 MDIO Interface to the PCS is present, then this
        object maps to the PAF enable bit in the 10P/2B PCS control
        register.

        This object shall be maintained in a persistent manner."
    REFERENCE
        "IEEE Std 802.3, 61.2.2, 45.2.3.18.3"
        ::= { efmCuPortConfEntry 1 }
efmCuPAFDiscoveryCode OBJECT-TYPE
    SYNTAX      PhysAddress (SIZE(0|6))
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "PAF Discovery Code of the EFMCu port (PCS).
        A unique 6-octet code used by the Discovery function,
        when PAF is supported.
        PCS ports incapable of supporting PAF shall return a
        zero-length octet string on an attempt to read this object.
        An attempt to write to this object shall be rejected for such
        ports.
        This object shall be instantiated for the -O subtype PCS before

```

writing operations on the efmCuPAFRemoteDiscoveryCode (Set\_if\_Clear and Clear\_if\_Same) are performed by PMEs associated with the PCS.

The initial value of this object for -R subtype ports after reset is all zeroes. For -R subtype ports, the value of this object cannot be changed directly. This value may be changed as a result of writing operation on the efmCuPAFRemoteDiscoveryCode object of remote PME of -O subtype, connected to one of the local PMEs associated with the PCS.

Discovery shall be performed when the link is Down. Attempts to change this object shall be rejected (in case of SNMP with the error inconsistentValue), if the link is Up or Initializing.

The PAF Discovery Code maps to the local Discovery code variable in PAF (note that it does not have a corresponding Clause 45 register)."

#### REFERENCE

"IEEE Std 802.3, 61.2.2.8.3, 61.2.2.8.4, 45.2.6.6.1, 45.2.6.8, 61A.2"

::= { efmCuPortConfEntry 2 }

#### efmCuAdminProfile OBJECT-TYPE

SYNTAX EfmProfileIndexList

MAX-ACCESS read-write

STATUS current

#### DESCRIPTION

"Desired configuration profile(s), common for all PMEs in the EFMCu port. This object is a list of pointers to entries in either efmCuPme2BProfileTable or efmCuPme10PProfileTable, depending on the current operating SubType of the EFMCu port as indicated by efmCuPortSide.

The value of this object is a list of up to 6 indices of profiles. If this list consists of a single profile index, then all PMEs assigned to this EFMCu port shall be configured according to the profile referenced by that index, unless it is overwritten by a corresponding non-zero efmCuPmeAdminProfile instance, which takes precedence over efmCuAdminProfile.

A list consisting of more than one index allows each PME in the port to be configured according to any profile specified in the list.

By default, this object has a value of 0x01, referencing the 1st entry in efmCuPme2BProfileTable or efmCuPme10PProfileTable.

This object is writable and readable for the -O subtype (2BaseTL-O or 10PassTS-O) EFMCu ports. It is irrelevant for the -R subtype (2BaseTL-R or 10PassTS-R) ports -- a zero-length octet string shall be returned on an attempt to read this object and an attempt to change this object shall be rejected in this case.

Note that the current operational profile value is available via the efmCuPmeOperProfile object.

Any modification of this object shall be performed when the link is Down. Attempts to change this object shall be rejected, if the link is Up or Initializing. Attempts to set this object to a list with a member value that is not the value of the index for an active entry in the corresponding profile table shall be rejected.

This object maps to the Clause 30 attribute aProfileSelect.

This object shall be maintained in a persistent manner."

## REFERENCE

"IEEE Std 802.3, 30.11.2.1.6"

DEFVAL { '01'H }

::= { efmCuPortConfEntry 3 }

efmCuTargetDataRate OBJECT-TYPE

SYNTAX Unsigned32(1..100000|999999)

UNITS "Kbps"

MAX-ACCESS read-write

STATUS current

## DESCRIPTION

"Desired EFMCu port 'net' (as seen across MII) Data Rate in kb/s, to be achieved during initialization, under spectral restrictions placed on each PME via efmCuAdminProfile or efmCuPmeAdminProfile, with the desired SNR margin specified by efmCuTargetSnrMgn.

In case of PAF, this object represents a sum of individual PME data rates, modified to compensate for fragmentation and 64/65-octet encapsulation overhead (e.g., target data rate of 10 Mb/s shall allow lossless transmission of a full-duplex 10 Mb/s Ethernet frame stream with minimal inter-frame gap).

The value is limited above by 100 Mb/s as this is the max burst rate across MII for EFMCu ports.

The value between 1 and 100000 indicates that the total data rate (ifSpeed) of the EFMCu port after initialization shall be equal to the target data rate or less, if the target data rate cannot be achieved under spectral restrictions specified by efmCuAdminProfile/efmCuPmeAdminProfile and with the desired SNR margin. In case the copper environment allows a higher total data rate to be achieved than that specified by the target, the excess capability shall be either converted to additional SNR margin or reclaimed by minimizing transmit power as controlled by efmCuAdaptiveSpectra.

The value of 999999 means that the target data rate is not fixed and shall be set to the maximum attainable rate during initialization (Best Effort), under specified spectral restrictions and with the desired SNR margin.

This object is read-write for the -O subtype EFMCu ports (2BaseTL-O/10PassTS-O) and not available for the -R subtypes.

Changing of the Target Data Rate shall be performed when the link is Down. Attempts to change this object shall be rejected (in case of SNMP with the error inconsistentValue), if the link is Up or Initializing.

Note that the current Data Rate of the EFMCu port is represented by the ifSpeed object of IF-MIB.

This object shall be maintained in a persistent manner."  
 ::= { efmCuPortConfEntry 4 }

efmCuTargetSnrMgn OBJECT-TYPE

SYNTAX Unsigned32(0..21)

UNITS "dB"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Desired EFMCu port SNR margin to be achieved on all PMEs assigned to the port, during initialization. (The SNR margin is the difference between the desired SNR and the actual SNR).

Note that 802.3ah recommends using a default target SNR margin of 5 dB for 2BASE-TL ports and 6 dB for 10PASS-TS ports in order to achieve a mean bit error ratio (BER) of  $10^{-7}$  at the PMA service interface.

This object is read-write for the -O subtype EFMCu ports (2BaseTL-O/10PassTS-O) and not available for the -R subtypes.

Changing of the target SNR margin shall be performed when the link is Down. Attempts to change this object shall be rejected (in case of SNMP with the error inconsistentValue), if the link is Up or Initializing.

Note that the current SNR margin of the PMEs comprising the EFMCu port is represented by efmCuPmeSnrMgn.

This object shall be maintained in a persistent manner."

REFERENCE

"IEEE Std 802.3, 61.1.2"

::= { efmCuPortConfEntry 5 }

efmCuAdaptiveSpectra OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Indicates how to utilize excess capacity when the copper environment allows a higher total data rate to be achieved than that specified by the efmCuTargetDataRate.

A value of true(1) indicates that the excess capability shall be reclaimed by minimizing transmit power, e.g., using higher constellations and Power Back-Off, in order to reduce interference to other copper pairs in the binder and the adverse impact to link/system performance.

A value of false(2) indicates that the excess capability shall be converted to additional SNR margin and spread evenly across all active PMEs assigned to the (PCS) port, to increase link robustness.

This object is read-write for the -O subtype EFMCu ports (2BaseTL-O/10PassTS-O) and not available for the -R subtypes.

Changing of this object shall be performed when the link is Down. Attempts to change this object shall be rejected (in case of SNMP with the error inconsistentValue), if the link is Up or Initializing.

This object shall be maintained in a persistent manner."

```
::= { efmCuPortConfEntry 6 }
```

efmCuThreshLowRate OBJECT-TYPE

SYNTAX Unsigned32(1..100000)

UNITS "Kbps"

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"This object configures the EFMCu port low-rate crossing alarm threshold. When the current value of ifSpeed for this port reaches/drops below or exceeds this threshold, an efmCuLowRateCrossing notification may be generated if enabled by efmCuLowRateCrossingEnable.

This object is read-write for the -O subtype EFMCu ports (2BaseTL-O/10PassTS-O) and not available for the -R subtypes.

This object shall be maintained in a persistent manner."

```
::= { efmCuPortConfEntry 7 }
```

efmCuLowRateCrossingEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Indicates whether efmCuLowRateCrossing notifications should be generated for this interface.

A value of true(1) indicates that efmCuLowRateCrossing notification is enabled. A value of false(2) indicates that the notification is disabled.

This object is read-write for the -O subtype EFMCu ports (2BaseTL-O/10PassTS-O) and not available for the -R subtypes.

This object shall be maintained in a persistent manner."

```
::= { efmCuPortConfEntry 8 }
```

efmCuPortCapabilityTable OBJECT-TYPE

SYNTAX SEQUENCE OF EfmCuPortCapabilityEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Table for Capabilities of EFMCu 2BASE-TL/10PASS-TS (PCS) Ports. Entries in this table shall be maintained in a persistent manner"

```
::= { efmCuPort 2 }
```

efmCuPortCapabilityEntry OBJECT-TYPE

SYNTAX EfmCuPortCapabilityEntry

MAX-ACCESS not-accessible

```

STATUS      current
DESCRIPTION
  "An entry in the EFMcu Port Capability table.
  Each entry represents an EFMcu port indexed by the ifIndex.
  Note that an EFMcu PCS port runs on top of a single
  or multiple PME port(s), which are also indexed by ifIndex."
INDEX      { ifIndex }
 ::= { efmCuPortCapabilityTable 1 }

EfmCuPortCapabilityEntry ::=
SEQUENCE {
  efmCuPAFSupported          TruthValue,
  efmCuPeerPAFSupported     EfmTruthValueOrUnknown,
  efmCuPAFCapacity          Unsigned32,
  efmCuPeerPAFCapacity      Unsigned32
}

efmCuPAFSupported OBJECT-TYPE
SYNTAX      TruthValue
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "PME Aggregation Function (PAF) capability of the EFMcu port
  (PCS).
  This object has a value of true(1) when the PCS can perform
  PME aggregation on the available PMEs.
  Ports incapable of PAF shall return a value of false(2).

  This object maps to the Clause 30 attribute aPAFSupported.

  If a Clause 45 MDIO Interface to the PCS is present,
  then this object maps to the PAF available bit in the
  10P/2B capability register."
REFERENCE
  "IEEE Std 802.3, 61.2.2, 30.11.1.1.4, 45.2.3.17.1"
 ::= { efmCuPortCapabilityEntry 1 }

efmCuPeerPAFSupported OBJECT-TYPE
SYNTAX      EfmTruthValueOrUnknown
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "PME Aggregation Function (PAF) capability of the EFMcu port
  (PCS) link partner.
  This object has a value of true(1) when the remote PCS can
  perform PME aggregation on its available PMEs.
  Ports whose peers are incapable of PAF shall return a value
  of false(2).
  Ports whose peers cannot be reached because of the link
  state shall return a value of unknown(0).

  This object maps to the Clause 30 attribute
  aRemotePAFSupported.

  If a Clause 45 MDIO Interface to the PCS is present, then
  this object maps to the Remote PAF supported bit in the
  10P/2B capability register."
REFERENCE
  "IEEE Std 802.3, 61.2.2, 30.11.1.1.9, 45.2.3.17.2"

```

```

 ::= { efmCuPortCapabilityEntry 2 }

efmCuPAFCapacity OBJECT-TYPE
    SYNTAX      Unsigned32 (1..32)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "Number of PMEs that can be aggregated by the local PAF.
        The number of PMEs currently assigned to a particular
        EFMcu port (efmCuNumPMEs) is never greater than
        efmCuPAFCapacity.

        This object maps to the Clause 30 attribute
        aLocalPAFCapacity."
    REFERENCE
        "IEEE Std 802.3, 61.2.2, 30.11.1.1.6"
 ::= { efmCuPortCapabilityEntry 3 }

efmCuPeerPAFCapacity OBJECT-TYPE
    SYNTAX      Unsigned32 (0|1..32)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "Number of PMEs that can be aggregated by the PAF of the peer
        PHY (PCS port).
        A value of 0 is returned when peer PAF capacity is unknown
        (peer cannot be reached).
        This object maps to the Clause 30 attribute
        aRemotePAFCapacity."
    REFERENCE
        "IEEE Std 802.3, 61.2.2, 30.11.1.1.10"
 ::= { efmCuPortCapabilityEntry 4 }

efmCuPortStatusTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF EfmCuPortStatusEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "This table provides overall status information of EFMcu
        2BASE-TL/10PASS-TS ports, complementing the generic status
        information from the ifTable of IF-MIB and ifMauTable of the
        MAU-MIB module. Additional status information about connected PMEs
        is available from the efmCuPmeStatusTable.

        This table contains live data from the equipment. As such,
        it is not persistent."
 ::= { efmCuPort 3 }

efmCuPortStatusEntry OBJECT-TYPE
    SYNTAX      EfmCuPortStatusEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION
        "An entry in the EFMcu Port Status table.
        Each entry represents an EFMcu port indexed by the ifIndex.
        Note that an EFMcu PCS port runs on top of a single
        or multiple PME port(s), which are also indexed by ifIndex."
    INDEX      { ifIndex }
 ::= { efmCuPortStatusTable 1 }

```

EfmCuPortStatusEntry ::=

```
SEQUENCE {
    efmCuFltStatus          BITS,
    efmCuPortSide          INTEGER,
    efmCuNumPMEs           Unsigned32,
    efmCuPAFInErrors       Counter32,
    efmCuPAFInSmallFragments Counter32,
    efmCuPAFInLargeFragments Counter32,
    efmCuPAFInBadFragments Counter32,
    efmCuPAFInLostFragments Counter32,
    efmCuPAFInLostStarts   Counter32,
    efmCuPAFInLostEnds     Counter32,
    efmCuPAFInOverflows    Counter32
}
```

efmCuFltStatus OBJECT-TYPE

```
SYNTAX      BITS {
    noPeer(0),
    peerPowerLoss(1),
    pmeSubTypeMismatch(2),
    lowRate(3)
}
```

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"EFMCu (PCS) port Fault Status. This is a bitmap of possible conditions. The various bit positions are:

- noPeer - the peer PHY cannot be reached (e.g., no PMEs attached, all PMEs are Down, etc.). More info is available in efmCuPmeFltStatus.
- peerPowerLoss - the peer PHY has indicated impending unit failure due to loss of local power ('Dying Gasp').
- pmeSubTypeMismatch - local PMEs in the aggregation group are not of the same subtype, e.g., some PMEs in the local device are -O while others are -R subtype.
- lowRate - ifSpeed of the port reached or dropped below efmCuThreshLowRate.

This object is intended to supplement the ifOperStatus object in IF-MIB and ifMauMediaAvailable in the MAU-MIB module.

Additional information is available via the efmCuPmeFltStatus object for each PME in the aggregation group (single PME if PAF is disabled)."

REFERENCE

"IF-MIB, ifOperStatus; MAU-MIB, ifMauMediaAvailable; efmCuPmeFltStatus"

::= { efmCuPortStatusEntry 1 }

efmCuPortSide OBJECT-TYPE

```
SYNTAX      INTEGER {
    subscriber(1),
    office(2),
    unknown(3)
}
```

```

MAX-ACCESS read-only
STATUS      current
DESCRIPTION
  "EFM port mode of operation (subtype).
  The value of 'subscriber' indicates that the port is
  designated as '-R' subtype (all PMEs assigned to this port are
  of subtype '-R').
  The value of the 'office' indicates that the port is
  designated as '-O' subtype (all PMEs assigned to this port are
  of subtype '-O').
  The value of 'unknown' indicates that the port has no assigned
  PMEs yet or that the assigned PMEs are not of the same side
  (subTypePMEMismatch).

  This object partially maps to the Clause 30 attribute
  aPhyEnd."
REFERENCE
  "IEEE Std 802.3, 61.1, 30.11.1.1.2"
 ::= { efmCuPortStatusEntry 2 }

efmCuNumPMEs OBJECT-TYPE
SYNTAX      Unsigned32 (0..32)
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "The number of PMEs that is currently aggregated by the local
  PAF (assigned to the EFMcu port using the ifStackTable).
  This number is never greater than efmCuPAFCapacity.

  This object shall be automatically incremented or decremented
  when a PME is added or deleted to/from the EFMcu port using
  the ifStackTable."
REFERENCE
  "IEEE Std 802.3, 61.2.2, 30.11.1.1.6"
 ::= { efmCuPortStatusEntry 3 }

efmCuPAFInErrors OBJECT-TYPE
SYNTAX      Counter32
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
  "The number of fragments that have been received across the
  gamma interface with RxErr asserted and discarded.
  This read-only counter is inactive (not incremented) when the
  PAF is unsupported or disabled. Upon disabling the PAF, the
  counter retains its previous value.

  If a Clause 45 MDIO Interface to the PCS is present, then
  this object maps to the 10P/2B PAF RX error register.

  Discontinuities in the value of this counter can occur at
  re-initialization of the management system, and at other times
  as indicated by the value of ifCounterDiscontinuityTime,
  defined in IF-MIB."
REFERENCE
  "IEEE Std 802.3, 45.2.3.21"
 ::= { efmCuPortStatusEntry 4 }

efmCuPAFInSmallFragments OBJECT-TYPE

```

SYNTAX Counter32  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION

"The number of fragments smaller than minFragmentSize (64 bytes) that have been received across the gamma interface and discarded.

This read-only counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the counter retains its previous value.

If a Clause 45 MDIO Interface to the PCS is present, then this object maps to the 10P/2B PAF small fragments register.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime, defined in IF-MIB."

REFERENCE

"IEEE Std 802.3, 45.2.3.22"  
 ::= { efmCuPortStatusEntry 5 }

efmCuPAFInLargeFragments OBJECT-TYPE

SYNTAX Counter32  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION

"The number of fragments larger than maxFragmentSize (512 bytes) that have been received across the gamma interface and discarded.

This read-only counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the counter retains its previous value.

If a Clause 45 MDIO Interface to the PCS is present, then this object maps to the 10P/2B PAF large fragments register.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime, defined in IF-MIB."

REFERENCE

"IEEE Std 802.3, 45.2.3.23"  
 ::= { efmCuPortStatusEntry 6 }

efmCuPAFInBadFragments OBJECT-TYPE

SYNTAX Counter32  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION

"The number of fragments that do not fit into the sequence expected by the frame assembly function and that have been received across the gamma interface and discarded (the frame buffer is flushed to the next valid frame start).

This read-only counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the counter retains its previous value.

If a Clause 45 MDIO Interface to the PCS is present, then

this object maps to the 10P/2B PAF bad fragments register.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime, defined in IF-MIB."

## REFERENCE

"IEEE Std 802.3, 45.2.3.25"

::= { efmCuPortStatusEntry 7 }

## efmCuPAFInLostFragments OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"The number of gaps in the sequence of fragments that have been received across the gamma interface (the frame buffer is flushed to the next valid frame start, when fragment/fragments expected by the frame assembly function is/are not received). This read-only counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the counter retains its previous value.

If a Clause 45 MDIO Interface to the PCS is present, then this object maps to the 10P/2B PAF lost fragment register.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime, defined in IF-MIB."

## REFERENCE

"IEEE Std 802.3, 45.2.3.26"

::= { efmCuPortStatusEntry 8 }

## efmCuPAFInLostStarts OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

## DESCRIPTION

"The number of missing StartOfPacket indicators expected by the frame assembly function. This read-only counter is inactive when the PAF is unsupported or disabled. Upon disabling the PAF, the counter retains its previous value.

If a Clause 45 MDIO Interface to the PCS is present, then this object maps to the 10P/2B PAF lost start of fragment register.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime, defined in IF-MIB."

## REFERENCE

"IEEE Std 802.3, 45.2.3.27"

::= { efmCuPortStatusEntry 9 }

## efmCuPAFInLostEnds OBJECT-TYPE

SYNTAX Counter32

```

MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The number of missing EndOfPacket indicators expected by the
    frame assembly function.
    This read-only counter is inactive when the PAF is
    unsupported or disabled. Upon disabling the PAF, the counter
    retains its previous value.

    If a Clause 45 MDIO Interface to the PCS is present, then
    this object maps to the 10P/2B PAF lost start of fragment
    register.

    Discontinuities in the value of this counter can occur at
    re-initialization of the management system, and at other times
    as indicated by the value of ifCounterDiscontinuityTime,
    defined in IF-MIB."
REFERENCE
    "IEEE Std 802.3, 45.2.3.28"
 ::= { efmCuPortStatusEntry 10 }
efmCuPAFInOverflows OBJECT-TYPE
SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "The number of fragments, received across the gamma interface
    and discarded, which would have caused the frame assembly
    buffer to overflow.
    This read-only counter is inactive when the PAF is
    unsupported or disabled. Upon disabling the PAF, the counter
    retains its previous value.

    If a Clause 45 MDIO Interface to the PCS is present, then
    this object maps to the 10P/2B PAF overflow register.

    Discontinuities in the value of this counter can occur at
    re-initialization of the management system, and at other times
    as indicated by the value of ifCounterDiscontinuityTime,
    defined in IF-MIB."
REFERENCE
    "IEEE Std 802.3, 45.2.3.24"
 ::= { efmCuPortStatusEntry 11 }

-- PME Notifications Group

efmCuPmeNotifications OBJECT IDENTIFIER ::= { efmCuPme 0 }

efmCuPmeLineAtnCrossing NOTIFICATION-TYPE
OBJECTS {
    efmCuPmeLineAtn,
    efmCuPmeThreshLineAtn
}
STATUS current
DESCRIPTION
    "This notification indicates that the loop attenuation
    threshold (as per the efmCuPmeThreshLineAtn
    value) has been reached/exceeded for the 2BASE-TL/10PASS-TS
    PME. This notification may be sent on the crossing event in
    both directions: from normal to exceeded and from exceeded

```

to normal.

A small debouncing period of 2.5 sec, between the detection of the condition and the notification, should be implemented to prevent intermittent notifications from being sent.

Generation of this notification is controlled by the efmCuPmeLineAtnCrossingEnable object."  
 ::= { efmCuPmeNotifications 1 }

efmCuPmeSnrMgnCrossing NOTIFICATION-TYPE

OBJECTS {  
   efmCuPmeSnrMgn,  
   efmCuPmeThreshSnrMgn  
 }

STATUS current

DESCRIPTION

"This notification indicates that the SNR margin threshold (as per the efmCuPmeThreshSnrMgn value) has been reached/exceeded for the 2BASE-TL/10PASS-TS PME. This notification may be sent on the crossing event in both directions: from normal to exceeded and from exceeded to normal.

A small debouncing period of 2.5 sec, between the detection of the condition and the notification, should be implemented to prevent intermittent notifications from being sent.

Generation of this notification is controlled by the efmCuPmeSnrMgnCrossingEnable object."  
 ::= { efmCuPmeNotifications 2 }

efmCuPmeDeviceFault NOTIFICATION-TYPE

OBJECTS {  
   efmCuPmeFltStatus  
 }

STATUS current

DESCRIPTION

"This notification indicates that a fault in the PME has been detected by a vendor-specific diagnostic or a self-test.

Generation of this notification is controlled by the efmCuPmeDeviceFaultEnable object."  
 ::= { efmCuPmeNotifications 3 }

efmCuPmeConfigInitFailure NOTIFICATION-TYPE

OBJECTS {  
   efmCuPmeFltStatus,  
   efmCuAdminProfile,  
   efmCuPmeAdminProfile  
 }

STATUS current

DESCRIPTION

"This notification indicates that PME initialization has failed, due to inability of the PME link to achieve the requested configuration profile.

Generation of this notification is controlled by the efmCuPmeConfigInitFailEnable object."

```

 ::= { efmCuPmeNotifications 4 }

efmCuPmeProtocolInitFailure NOTIFICATION-TYPE
OBJECTS {
    efmCuPmeFltStatus,
    efmCuPmeOperSubType
}
STATUS      current
DESCRIPTION
    "This notification indicates that the peer PME was using
    an incompatible protocol during initialization.

    Generation of this notification is controlled by the
    efmCuPmeProtocolInitFailEnable object."
 ::= { efmCuPmeNotifications 5 }

-- The PME group

efmCuPmeConfTable OBJECT-TYPE
SYNTAX      SEQUENCE OF EfmCuPmeConfEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "Table for Configuration of common aspects for EFMCu
    2BASE-TL/10PASS-TS PME ports (modems). Configuration of
    aspects specific to 2BASE-TL or 10PASS-TS PME types is
    represented in efmCuPme2BConfTable and efmCuPme10PConfTable,
    respectively.

    Entries in this table shall be maintained in a persistent
    manner."
 ::= { efmCuPme 1 }

efmCuPmeConfEntry OBJECT-TYPE
SYNTAX      EfmCuPmeConfEntry
MAX-ACCESS  not-accessible
STATUS      current
DESCRIPTION
    "An entry in the EFMCu PME Configuration table.
    Each entry represents common aspects of an EFMCu PME port
    indexed by the ifIndex. Note that an EFMCu PME port can be
    stacked below a single PCS port, also indexed by ifIndex,
    possibly together with other PME ports if PAF is enabled."
INDEX       { ifIndex }
 ::= { efmCuPmeConfTable 1 }

EfmCuPmeConfEntry ::=
SEQUENCE {
    efmCuPmeAdminSubType      INTEGER,
    efmCuPmeAdminProfile      EfmProfileIndexOrZero,
    efmCuPAFRemoteDiscoveryCode PhysAddress,
    efmCuPmeThreshLineAtn     Integer32,
    efmCuPmeThreshSnrMgn      Integer32,
    efmCuPmeLineAtnCrossingEnable TruthValue,
    efmCuPmeSnrMgnCrossingEnable TruthValue,
    efmCuPmeDeviceFaultEnable TruthValue,
    efmCuPmeConfigInitFailEnable TruthValue,
    efmCuPmeProtocolInitFailEnable TruthValue
}

```

```

efmCuPmeAdminSubType OBJECT-TYPE
    SYNTAX      INTEGER {
        ieee2BaseTLO(1),
        ieee2BaseTLR(2),
        ieee10PassTSO(3),
        ieee10PassTSR(4),
        ieee2BaseTLor10PassTSR(5),
        ieee2BaseTLor10PassTSO(6),
        ieee10PassTSor2BaseTLO(7)
    }
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION
        "Administrative (desired) subtype of the PME.
        Possible values are:
        ieee2BaseTLO          - PME shall operate as 2BaseTL-O
        ieee2BaseTLR          - PME shall operate as 2BaseTL-R
        ieee10PassTSO         - PME shall operate as 10PassTS-O
        ieee10PassTSR        - PME shall operate as 10PassTS-R
        ieee2BaseTLor10PassTSR - PME shall operate as 2BaseTL-R or
                                10PassTS-R. The actual value will
                                be set by the -O link partner
                                during initialization (handshake).
        ieee2BaseTLor10PassTSO - PME shall operate as 2BaseTL-O
                                (preferred) or 10PassTS-O. The
                                actual value will be set during
                                initialization depending on the -R
                                link partner capability (i.e., if
                                -R is incapable of the preferred
                                2BaseTL mode, 10PassTS will be
                                used).
        ieee10PassTSor2BaseTLO - PME shall operate as 10PassTS-O
                                (preferred) or 2BaseTL-O. The
                                actual value will be set during
                                initialization depending on the -R
                                link partner capability (i.e., if
                                -R is incapable of the preferred
                                10PassTS mode, 2BaseTL will be
                                used).

        Changing efmCuPmeAdminSubType is a traffic-disruptive
        operation and as such shall be done when the link is Down.
        Attempts to change this object shall be rejected if the link
        is Up or Initializing.
        Attempts to change this object to an unsupported subtype
        (see efmCuPmeSubTypesSupported) shall be rejected.

        The current operational subtype is indicated by the
        efmCuPmeOperSubType variable.

        If a Clause 45 MDIO Interface to the PMA/PMD is present, then
        this object combines values of the Port subtype select bits
        and the PMA/PMD type selection bits in the 10P/2B PMA/PMD
        control register."
    REFERENCE
        "IEEE Std 802.3, 61.1, 45.2.1.11.4, 45.2.1.11.7"
    ::= { efmCuPmeConfEntry 1 }

```

efmCuPmeAdminProfile OBJECT-TYPE  
 SYNTAX EfmProfileIndexOrZero  
 MAX-ACCESS read-write  
 STATUS current  
 DESCRIPTION  
 "Desired PME configuration profile. This object is a pointer to an entry in either the efmCuPme2BProfileTable or the efmCuPme10PProfileTable, depending on the current operating SubType of the PME. The value of this object is the index of the referenced profile.  
 The value of zero (default) indicates that the PME is configured via the efmCuAdminProfile object for the PCS port to which this PME is assigned. That is, the profile referenced by efmCuPmeAdminProfile takes precedence over the profile(s) referenced by efmCuAdminProfile.

This object is writable and readable for the CO subtype PMEs (2BaseTL-O or 10PassTS-O). It is irrelevant for the CPE subtype (2BaseTL-R or 10PassTS-R) -- a zero value shall be returned on an attempt to read this object and any attempt to change this object shall be rejected in this case. Note that the current operational profile value is available via efmCuPmeOperProfile object.

Any modification of this object shall be performed when the link is Down. Attempts to change this object shall be rejected, if the link is Up or Initializing.

Attempts to set this object to a value that is not the value of the index for an active entry in the corresponding profile table shall be rejected.

This object maps to the Clause 30 attribute aProfileSelect.

This object shall be maintained in a persistent manner."

REFERENCE  
 "IEEE Std 802.3, 30.11.2.1.6"  
 DEFVAL { 0 }  
 ::= { efmCuPmeConfEntry 2 }

efmCuPAFRemoteDiscoveryCode OBJECT-TYPE  
 SYNTAX PhysAddress (SIZE(0|6))  
 MAX-ACCESS read-write  
 STATUS current  
 DESCRIPTION  
 "PAF Remote Discovery Code of the PME port at the CO.  
 The 6-octet Discovery Code of the peer PCS connected via the PME.  
 Reading this object results in a Discovery Get operation. Setting this object to all zeroes results in a Discovery Clear\_if\_Same operation (the value of efmCuPAFDiscoveryCode at the peer PCS shall be the same as efmCuPAFDiscoveryCode of the local PCS associated with the PME for the operation to succeed).  
 Writing a non-zero value to this object results in a Discovery Set\_if\_Clear operation.  
 A zero-length octet string shall be returned on an attempt to read this object when PAF aggregation is not enabled.

This object is irrelevant in CPE port (-R) subtypes: in this case, a zero-length octet string shall be returned on an attempt to read this object; writing to this object shall be rejected.

Discovery shall be performed when the link is Down. Attempts to change this object shall be rejected (in case of SNMP with the error inconsistentValue), if the link is Up or Initializing.

If a Clause 45 MDIO Interface to the PMA/PMD is present, then this object is a function of 10P/2B aggregation discovery control register, Discovery operation result bits in 10P/2B aggregation and discovery status register and 10P/2B aggregation discovery code register."

## REFERENCE

"IEEE Std 802.3, 61.2.2.8.4, 45.2.6.6-45.2.6.8"  
 ::= { efmCuPmeConfEntry 3 }

## efmCuPmeThreshLineAtn OBJECT-TYPE

SYNTAX Integer32(-127..128)

UNITS "dB"

MAX-ACCESS read-write

STATUS current

## DESCRIPTION

"Desired Line Attenuation threshold for the 2B/10P PME. This object configures the line attenuation alarm threshold. When the current value of Line Attenuation reaches or exceeds this threshold, an efmCuPmeLineAtnCrossing notification may be generated, if enabled by efmCuPmeLineAtnCrossingEnable.

This object is writable for the CO subtype PMEs (-O). It is read-only for the CPE subtype (-R).

Changing of the Line Attenuation threshold shall be performed when the link is Down. Attempts to change this object shall be rejected (in case of SNMP with the error inconsistentValue), if the link is Up or Initializing.

If a Clause 45 MDIO Interface to the PME is present, then this object maps to the loop attenuation threshold bits in the 2B PMD line quality thresholds register."

## REFERENCE

"IEEE Std 802.3, 45.2.1.36"  
 ::= { efmCuPmeConfEntry 4 }

## efmCuPmeThreshSnrMgn OBJECT-TYPE

SYNTAX Integer32(-127..128)

UNITS "dB"

MAX-ACCESS read-write

STATUS current

## DESCRIPTION

"Desired SNR margin threshold for the 2B/10P PME. This object configures the SNR margin alarm threshold. When the current value of SNR margin reaches or exceeds this threshold, an efmCuPmeSnrMgnCrossing notification may be generated, if enabled by efmCuPmeSnrMgnCrossingEnable. This object is writable for the CO subtype PMEs

(2BaseTL-O/10PassTS-O). It is read-only for the CPE subtype (2BaseTL-R/10PassTS-R).

Changing of the SNR margin threshold shall be performed when the link is Down. Attempts to change this object shall be rejected (in case of SNMP with the error inconsistentValue), if the link is Up or Initializing.

If a Clause 45 MDIO Interface to the PME is present, then this object maps to the SNR margin threshold bits in the 2B PMD line quality thresholds register."

REFERENCE

"IEEE Std 802.3, 45.2.1.36"  
 ::= { efmCuPmeConfEntry 5 }

efmCuPmeLineAtnCrossingEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Indicates whether efmCuPmeLineAtnCrossing notifications should be generated for this interface.

A value of true(1) indicates that efmCuPmeLineAtnCrossing notification is enabled. A value of false(2) indicates that the notification is disabled."

::= { efmCuPmeConfEntry 6 }

efmCuPmeSnrMgnCrossingEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Indicates whether efmCuPmeSnrMgnCrossing notifications should be generated for this interface.

A value of true(1) indicates that efmCuPmeSnrMgnCrossing notification is enabled. A value of false(2) indicates that the notification is disabled."

::= { efmCuPmeConfEntry 7 }

efmCuPmeDeviceFaultEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Indicates whether efmCuPmeDeviceFault notifications should be generated for this interface.

A value of true(1) indicates that efmCuPmeDeviceFault notification is enabled. A value of false(2) indicates that the notification is disabled."

::= { efmCuPmeConfEntry 8 }

efmCuPmeConfigInitFailEnable OBJECT-TYPE

SYNTAX TruthValue

MAX-ACCESS read-write

STATUS current

DESCRIPTION

"Indicates whether efmCuPmeConfigInitFailure notifications should be generated for this interface.

A value of true(1) indicates that efmCuPmeConfigInitFailure notification is enabled. A value of false(2) indicates that the notification is disabled."  
 ::= { efmCuPmeConfEntry 9 }

efmCuPmeProtocolInitFailEnable OBJECT-TYPE

SYNTAX TruthValue  
 MAX-ACCESS read-write  
 STATUS current

DESCRIPTION

"Indicates whether efmCuPmeProtocolInitFailure notifications should be generated for this interface.

A value of true(1) indicates that efmCuPmeProtocolInitFailure notification is enabled. A value of false(2) indicates that the notification is disabled."  
 ::= { efmCuPmeConfEntry 10 }

efmCuPmeCapabilityTable OBJECT-TYPE

SYNTAX SEQUENCE OF EfmCuPmeCapabilityEntry  
 MAX-ACCESS not-accessible  
 STATUS current

DESCRIPTION

"Table for the configuration of common aspects for EFMCu 2BASE-TL/10PASS-TS PME ports (modems). The configuration of aspects specific to 2BASE-TL or 10PASS-TS PME types is represented in the efmCuPme2BConfTable and the efmCuPme10PConfTable, respectively.

Entries in this table shall be maintained in a persistent manner."

::= { efmCuPme 2 }

efmCuPmeCapabilityEntry OBJECT-TYPE

SYNTAX EfmCuPmeCapabilityEntry  
 MAX-ACCESS not-accessible  
 STATUS current

DESCRIPTION

"An entry in the EFMCu PME Capability table.  
 Each entry represents common aspects of an EFMCu PME port indexed by the ifIndex. Note that an EFMCu PME port can be stacked below a single PCS port, also indexed by ifIndex, possibly together with other PME ports if PAF is enabled."

INDEX { ifIndex }

::= { efmCuPmeCapabilityTable 1 }

EfmCuPmeCapabilityEntry ::=

SEQUENCE {  
   efmCuPmeSubTypesSupported BITS  
 }

efmCuPmeSubTypesSupported OBJECT-TYPE

SYNTAX BITS {  
   ieee2BaseTLO(0),  
   ieee2BaseTLR(1),  
   ieee10PassTSO(2),

```

    ieee10PassTSR(3)
  }
MAX-ACCESS    read-only
STATUS        current
DESCRIPTION
  "PME supported subtypes. This is a bitmap of possible
  subtypes. The various bit positions are:
    ieee2BaseTLO    - PME is capable of operating as 2BaseTL-O
    ieee2BaseTLR    - PME is capable of operating as 2BaseTL-R
    ieee10PassTSO   - PME is capable of operating as 10PassTS-O
    ieee10PassTSR   - PME is capable of operating as 10PassTS-R

  The desired mode of operation is determined by
  efmCuPmeAdminSubType, while efmCuPmeOperSubType reflects the
  current operating mode.

  If a Clause 45 MDIO Interface to the PCS is present, then this
  object combines the 10PASS-TS capable and 2BASE-TL capable
  bits in the 10P/2B PMA/PMD speed ability register and the
  CO supported and CPE supported bits in the 10P/2B PMA/PMD
  status register."
REFERENCE
  "IEEE Std 802.3, 61.1, 45.2.1.4.1, 45.2.1.4.2, 45.2.1.12.2,
  45.2.1.12.3"
 ::= { efmCuPmeCapabilityEntry 1 }
efmCuPmeStatusTable OBJECT-TYPE
SYNTAX        SEQUENCE OF EfmCuPmeStatusEntry
MAX-ACCESS    not-accessible
STATUS        current
DESCRIPTION
  "This table provides common status information of EFMCu
  2BASE-TL/10PASS-TS PME ports. Status information specific
  to 10PASS-TS PME is represented in efmCuPme10PStatusTable.

  This table contains live data from the equipment. As such,
  it is not persistent."
 ::= { efmCuPme 3 }

efmCuPmeStatusEntry OBJECT-TYPE
SYNTAX        EfmCuPmeStatusEntry
MAX-ACCESS    not-accessible
STATUS        current
DESCRIPTION
  "An entry in the EFMCu PME Status table.
  Each entry represents common aspects of an EFMCu PME port
  indexed by the ifIndex. Note that an EFMCu PME port can be
  stacked below a single PCS port, also indexed by ifIndex,
  possibly together with other PME ports if PAF is enabled."
INDEX         { ifIndex }
 ::= { efmCuPmeStatusTable 1 }

EfmCuPmeStatusEntry ::=
SEQUENCE {
    efmCuPmeOperStatus          INTEGER,
    efmCuPmeFltStatus           BITS,
    efmCuPmeOperSubType         INTEGER,
    efmCuPmeOperProfile         EfmProfileIndexOrZero,
    efmCuPmeSnrMgn              Integer32,
    efmCuPmePeerSnrMgn          Integer32,

```

```

    efmCuPmeLineAtn          Integer32,
    efmCuPmePeerLineAtn     Integer32,
    efmCuPmeEquivalentLength Unsigned32,
    efmCuPmeTCCodingErrors  Counter32,
    efmCuPmeTCCrcErrors     Counter32
  }

efmCuPmeOperStatus OBJECT-TYPE
  SYNTAX      INTEGER {
    up(1),
    downNotReady(2),
    downReady(3),
    init(4)
  }

  MAX-ACCESS read-only
  STATUS      current
  DESCRIPTION
    "Current PME link Operational Status. Possible values are:
     up(1)          - The link is Up and ready to pass
                     64/65-octet encoded frames or fragments.
     downNotReady(2) - The link is Down and the PME does not
                     detect Handshake tones from its peer.
                     This value may indicate a possible
                     problem with the peer PME.
     downReady(3)   - The link is Down and the PME detects
                     Handshake tones from its peer.
     init(4)        - The link is Initializing, as a result of
                     ifAdminStatus being set to 'up' for a
                     particular PME or a PCS to which the PME
                     is connected."

  This object is intended to supplement the Down(2) state of
  ifOperStatus.

  This object partially maps to the Clause 30 attribute
  aPMEStatus.

  If a Clause 45 MDIO Interface to the PME is present, then this
  object partially maps to PMA/PMD link status bits in 10P/2B
  PMA/PMD status register."
  REFERENCE
    "IEEE Std 802.3, 30.11.2.1.3, 45.2.1.12.4"
  ::= { efmCuPmeStatusEntry 1 }

efmCuPmeFltStatus OBJECT-TYPE
  SYNTAX      BITS {
    lossOfFraming(0),
    snrMgnDefect(1),
    lineAtnDefect(2),
    deviceFault(3),
    configInitFailure(4),
    protocolInitFailure(5)
  }
  MAX-ACCESS read-only
  STATUS      current
  DESCRIPTION
    "Current/Last PME link Fault Status. This is a bitmap of
    possible conditions. The various bit positions are:

```

lossOfFraming	- Loss of Framing for 10P or Loss of Sync word for 2B PMD or Loss of 64/65-octet framing.
snrMgnDefect	- SNR margin dropped below the threshold.
lineAtnDefect	- Line Attenuation exceeds the threshold.
deviceFault	- Indicates a vendor-dependent diagnostic or self-test fault has been detected.
configInitFailure	- Configuration initialization failure, due to inability of the PME link to support the configuration profile, requested during initialization.
protocolInitFailure	- Protocol initialization failure, due to an incompatible protocol used by the peer PME during init (that could happen if a peer PMD is a regular G.SDHSL/VDSL modem instead of a 2BASE-TL/10PASS-TS PME).

This object is intended to supplement ifOperStatus in IF-MIB.

This object holds information about the last fault. efmCuPmeFltStatus is cleared by the device restart. In addition, lossOfFraming, configInitFailure, and protocolInitFailure are cleared by PME init; deviceFault is cleared by successful diagnostics/test; snrMgnDefect and lineAtnDefect are cleared by SNR margin and Line attenuation, respectively, returning to norm and by PME init.

This object partially maps to the Clause 30 attribute aPMEStatus.

If a Clause 45 MDIO Interface to the PME is present, then this object consolidates information from various PMA/PMD registers, namely: Fault bit in PMA/PMD status 1 register, 10P/2B PMA/PMD link loss register, 10P outgoing indicator bits status register, 10P incoming indicator bits status register, 2B state defects register."

#### REFERENCE

"IEEE Std 802.3, 30.11.2.1.3, 45.2.1.2.1, 45.2.1.38, 45.2.1.39, 45.2.1.54"

::= { efmCuPmeStatusEntry 2 }

efmCuPmeOperSubType OBJECT-TYPE

```
SYNTAX      INTEGER {
    ieee2BaseTLO(1),
    ieee2BaseTLR(2),
    ieee10PassTSO(3),
    ieee10PassTSR(4)
}
```

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"Current operational subtype of the PME.

Possible values are:

ieee2BaseTLO	- PME operates as 2BaseTL-O
ieee2BaseTLR	- PME operates as 2BaseTL-R
ieee10PassTSO	- PME operates as 10PassTS-O
ieee10PassTSR	- PME operates as 10PassTS-R

The desired operational subtype of the PME can be configured via the efmCuPmeAdminSubType variable.

If a Clause 45 MDIO Interface to the PMA/PMD is present, then this object combines values of the Port subtype select bits, the PMA/PMD type selection bits in the 10P/2B PMA/PMD control register, and the PMA/PMD link status bits in the 10P/2B PMA/PMD status register."

REFERENCE

"IEEE Std 802.3, 61.1, 45.2.1.11.4, 45.2.1.11.7, 45.2.1.12.4"  
 ::= { efmCuPmeStatusEntry 3 }

efmCuPmeOperProfile OBJECT-TYPE

SYNTAX EfmProfileIndexOrZero

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"PME current operating profile. This object is a pointer to an entry in either the efmCuPme2BProfileTable or the efmCuPme10PProfileTable, depending on the current operating SubType of the PME as indicated by efmCuPmeOperSubType. Note that a profile entry to which efmCuPmeOperProfile is pointing can be created automatically to reflect achieved parameters in adaptive (not fixed) initialization, i.e., values of efmCuPmeOperProfile and efmCuAdminProfile or efmCuPmeAdminProfile may differ. The value of zero indicates that the PME is Down or Initializing.

This object partially maps to the aOperatingProfile attribute in Clause 30."

REFERENCE

"IEEE Std 802.3, 30.11.2.1.7"  
 ::= { efmCuPmeStatusEntry 4 }

efmCuPmeSnrMgn OBJECT-TYPE

SYNTAX Integer32(-127..128|65535)

UNITS "dB"

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The current Signal to Noise Ratio (SNR) margin with respect to the received signal as perceived by the local PME. The value of 65535 is returned when the PME is Down or Initializing.

This object maps to the aPMESNRMgn attribute in Clause 30.

If a Clause 45 MDIO Interface is present, then this object maps to the 10P/2B RX SNR margin register."

REFERENCE

"IEEE Std 802.3, 30.11.2.1.4, 45.2.1.16"  
 ::= { efmCuPmeStatusEntry 5 }

## efmCuPmePeerSnrMgn OBJECT-TYPE

SYNTAX Integer32(-127..128|65535)  
 UNITS "dB"  
 MAX-ACCESS read-only  
 STATUS current

## DESCRIPTION

"The current SNR margin in dB with respect to the received signal, as perceived by the remote (link partner) PME. The value of 65535 is returned when the PME is Down or Initializing.

This object is irrelevant for the -R PME subtypes. The value of 65535 shall be returned in this case.

If a Clause 45 MDIO Interface is present, then this object maps to the 10P/2B link partner RX SNR margin register."

## REFERENCE

"IEEE Std 802.3, 45.2.1.17"  
 ::= { efmCuPmeStatusEntry 6 }

## efmCuPmeLineAtn OBJECT-TYPE

SYNTAX Integer32(-127..128|65535)  
 UNITS "dB"  
 MAX-ACCESS read-only  
 STATUS current

## DESCRIPTION

"The current Line Attenuation in dB as perceived by the local PME. The value of 65535 is returned when the PME is Down or Initializing.

If a Clause 45 MDIO Interface is present, then this object maps to the Line Attenuation register."

## REFERENCE

"IEEE Std 802.3, 45.2.1.18"  
 ::= { efmCuPmeStatusEntry 7 }

## efmCuPmePeerLineAtn OBJECT-TYPE

SYNTAX Integer32(-127..128|65535)  
 UNITS "dB"  
 MAX-ACCESS read-only  
 STATUS current

## DESCRIPTION

"The current Line Attenuation in dB as perceived by the remote (link partner) PME. The value of 65535 is returned when the PME is Down or Initializing.

This object is irrelevant for the -R PME subtypes. The value of 65535 shall be returned in this case.

If a Clause 45 MDIO Interface is present, then this object maps to the 20P/2B link partner Line Attenuation register."

## REFERENCE

"IEEE Std 802.3, 45.2.1.19"  
 ::= { efmCuPmeStatusEntry 8 }

efmCuPmeEquivalentLength OBJECT-TYPE  
 SYNTAX Unsigned32(0..8192|65535)  
 UNITS "m"  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION  
 "An estimate of the equivalent loop's physical length in meters, as perceived by the PME after the link is established. An equivalent loop is a hypothetical 26AWG (0.4mm) loop with a perfect square root attenuation characteristic, without any bridged taps. The value of 65535 is returned if the link is Down or Initializing or the PME is unable to estimate the equivalent length.  
 For a 10BASE-TL PME, if a Clause 45 MDIO Interface to the PME is present, then this object maps to the 10P Electrical Length register."  
 REFERENCE  
 "IEEE Std 802.3, 45.2.1.21"  
 ::= { efmCuPmeStatusEntry 9 }

efmCuPmeTCCodingErrors OBJECT-TYPE  
 SYNTAX Counter32  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION  
 "The number of 64/65-octet encapsulation errors. This counter is incremented for each 64/65-octet encapsulation error detected by the 64/65-octet receive function.  
 This object maps to aTCCodingViolations attribute in Clause 30.  
 If a Clause 45 MDIO Interface to the PME TC is present, then this object maps to the TC coding violations register (see 45.2.6.12).  
 Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime, defined in IF-MIB."  
 REFERENCE  
 "IEEE Std 802.3, 61.3.3.1, 30.11.2.1.5, 45.2.6.12"  
 ::= { efmCuPmeStatusEntry 10 }

efmCuPmeTCCrcErrors OBJECT-TYPE  
 SYNTAX Counter32  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION  
 "The number of TC-CRC errors. This counter is incremented for each TC-CRC error detected by the 64/65-octet receive function (see 61.3.3.3 and Figure 61-19).  
 This object maps to aTCCRCErrors attribute in Clause 30.  
 If a Clause 45 MDIO Interface to the PME TC is present, then

this object maps to the TC CRC error register  
(see 45.2.6.11).

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime, defined in IF-MIB."

REFERENCE

"IEEE Std 802.3, 61.3.3.3, 30.11.2.1.10, 45.2.6.11"  
 ::= { efmCuPmeStatusEntry 11 }

-- 2BASE-TL specific PME group

efmCuPme2B OBJECT IDENTIFIER ::= { efmCuPme 5 }

efmCuPme2BProfileTable OBJECT-TYPE

SYNTAX SEQUENCE OF EfmCuPme2BProfileEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table supports definitions of administrative and operating profiles for 2BASE-TL PMEs. The first 14 entries in this table shall always be defined as follows (see 802.3ah Annex 63A):

Profile index	MinRate (kb/s)	MaxRate (kb/s)	Power (dBm)	Region	Constellation	Comment
1	5696	5696	13.5	1	32-TCPAM	default
2	3072	3072	13.5	1	32-TCPAM	
3	2048	2048	13.5	1	16-TCPAM	
4	1024	1024	13.5	1	16-TCPAM	
5	704	704	13.5	1	16-TCPAM	
6	512	512	13.5	1	16-TCPAM	
7	5696	5696	14.5	2	32-TCPAM	
8	3072	3072	14.5	2	32-TCPAM	
9	2048	2048	14.5	2	16-TCPAM	
10	1024	1024	13.5	2	16-TCPAM	
11	704	704	13.5	2	16-TCPAM	
12	512	512	13.5	2	16-TCPAM	
13	192	5696	0	1	0	best effort
14	192	5696	0	2	0	best effort

These default entries shall be created during agent initialization and shall not be deleted.

Entries following the first 14 can be dynamically created and deleted to provide custom administrative (configuration) profiles and automatic operating profiles.

This table shall be maintained in a persistent manner."

REFERENCE

"IEEE Std 802.3, Annex 63A, 30.11.2.1.6"  
 ::= { efmCuPme2B 2 }

efmCuPme2BProfileEntry OBJECT-TYPE

SYNTAX EfmCuPme2BProfileEntry

MAX-ACCESS not-accessible

STATUS current

## DESCRIPTION

"Each entry corresponds to a single 2BASE-TL PME profile. Each profile contains a set of parameters, used either for configuration or representation of a 2BASE-TL PME. In case a particular profile is referenced via the efmCuPmeAdminProfile object (or efmCuAdminProfile if efmCuPmeAdminProfile is zero), it represents the desired parameters for the 2BaseTL-O PME initialization. If a profile is referenced via an efmCuPmeOperProfile object, it represents the current operating parameters of an operational PME.

Profiles may be created/deleted using the row creation/deletion mechanism via efmCuPme2BProfileRowStatus. If an active entry is referenced, the entry shall remain 'active' until all references are removed.

Default entries shall not be removed."

```
INDEX { efmCuPme2BProfileIndex }
 ::= { efmCuPme2BProfileTable 1 }
```

```
EfmCuPme2BProfileEntry ::=
```

```
SEQUENCE {
    efmCuPme2BProfileIndex          EfmProfileIndex,
    efmCuPme2BProfileDescr         SnmpAdminString,
    efmCuPme2BRegion                INTEGER,
    efmCuPme2BsMode                 EfmProfileIndexOrZero,
    efmCuPme2BMinDataRate           Unsigned32,
    efmCuPme2BMaxDataRate           Unsigned32,
    efmCuPme2BPower                  Unsigned32,
    efmCuPme2BConstellation          INTEGER,
    efmCuPme2BProfileRowStatus       RowStatus
}
```

```
efmCuPme2BProfileIndex OBJECT-TYPE
```

```
SYNTAX      EfmProfileIndex
MAX-ACCESS  not-accessible
STATUS      current
```

## DESCRIPTION

"2BASE-TL PME profile index. This object is the unique index associated with this profile. Entries in this table are referenced via efmCuAdminProfile or efmCuPmeAdminProfile objects."

```
::= { efmCuPme2BProfileEntry 1 }
```

```
efmCuPme2BProfileDescr OBJECT-TYPE
```

```
SYNTAX      SnmpAdminString
MAX-ACCESS  read-create
STATUS      current
```

## DESCRIPTION

"A textual string containing information about a 2BASE-TL PME profile. The string may include information about the data rate and spectral limitations of this particular profile."

```
::= { efmCuPme2BProfileEntry 2 }
```

```
efmCuPme2BRegion OBJECT-TYPE
```

```
SYNTAX      INTEGER {
    region1(1),
    region2(2)
}
```

```
MAX-ACCESS  read-create
```

STATUS current

DESCRIPTION

"Regional settings for a 2BASE-TL PME, as specified in the relevant Regional Annex of ITU-T Recommendation G.991.2. Regional settings specify the Power Spectral Density (PSD) mask and the Power Back-Off (PBO) values, and place limitations on the max allowed data rate, power, and constellation.

Possible values for this object are:

- region1 - Annexes A and F (e.g., North America)
- region2 - Annexes B and G (e.g., Europe)

Annex A/B specify regional settings for data rates from 192 kb/s to 2304 kb/s using 16-TCPAM encoding.  
Annex F/G specify regional settings for rates from 2320 kb/s to 3840 kb/s using 16-TCPAM encoding and from 768 kb/s to 5696 kb/s using 32-TCPAM encoding.

If a Clause 45 MDIO Interface to the PME is present, then this object partially maps to the Region bits in the 2B general parameter register."

REFERENCE

"IEEE Std 802.3, 45.2.1.42; ITU-T Recommendation G.991.2, Annexes A, B, F and G"

::= { efmCuPme2BProfileEntry 3 }

efmCuPme2BsMode OBJECT-TYPE

SYNTAX EfmProfileIndexOrZero

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"Desired custom Spectral Mode for a 2BASE-TL PME. This object is a pointer to an entry in efmCuPme2BsModeTable and a block of entries in efmCuPme2BRateReachTable, which together define (country-specific) reach-dependent rate limitations in addition to those defined by efmCuPme2BRegion.

The value of this object is the index of the referenced spectral mode.  
The value of zero (default) indicates that no specific spectral mode is applicable.

Attempts to set this object to a value that is not the value of the index for an active entry in the corresponding spectral mode table shall be rejected."

REFERENCE

"efmCuPme2BsModeTable, efmCuPme2BRateReachTable"

DEFVAL { 0 }

::= { efmCuPme2BProfileEntry 4 }

efmCuPme2BMinDataRate OBJECT-TYPE

SYNTAX Unsigned32(192..5696)

UNITS "Kbps"

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"Minimum Data Rate for the 2BASE-TL PME.  
This object can take values of (n x 64)kb/s,

where  $n=3..60$  for 16-TCPAM and  $n=12..89$  for 32-TCPAM encoding.

The data rate of the 2BASE-TL PME is considered 'fixed' when the value of this object equals that of `efmCuPme2BMaxDataRate`. If `efmCuPme2BMinDataRate` is less than `efmCuPme2BMaxDataRate` in the administrative profile, the data rate is considered 'adaptive', and shall be set to the maximum attainable rate not exceeding `efmCuPme2BMaxDataRate`, under the spectral limitations placed by the `efmCuPme2BRegion` and `efmCuPme2BsMode`.

Note that the current operational data rate of the PME is represented by the `ifSpeed` object of IF-MIB.

If a Clause 45 MDIO Interface to the PME is present, then this object maps to the Min Data Rate1 bits in the 2B PMD parameters register.

This object shall be maintained in a persistent manner."

REFERENCE

"IEEE Std 802.3, 45.2.1.43"

:= { `efmCuPme2BProfileEntry 5` }

`efmCuPme2BMaxDataRate` OBJECT-TYPE

SYNTAX Unsigned32(192..5696)

UNITS "Kbps"

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"Maximum Data Rate for the 2BASE-TL PME.

This object can take values of  $(n \times 64)$ kb/s,

where  $n=3..60$  for 16-TCPAM and  $n=12..89$  for 32-TCPAM encoding.

The data rate of the 2BASE-TL PME is considered 'fixed' when the value of this object equals that of `efmCuPme2BMinDataRate`. If `efmCuPme2BMinDataRate` is less than `efmCuPme2BMaxDataRate` in the administrative profile, the data rate is considered 'adaptive', and shall be set to the maximum attainable rate not exceeding `efmCuPme2BMaxDataRate`, under the spectral limitations placed by the `efmCuPme2BRegion` and `efmCuPme2BsMode`.

Note that the current operational data rate of the PME is represented by the `ifSpeed` object of IF-MIB.

If a Clause 45 MDIO Interface to the PME is present, then this object maps to the Max Data Rate1 bits in the 2B PMD parameters register.

This object shall be maintained in a persistent manner."

REFERENCE

"IEEE Std 802.3, 45.2.1.43"

:= { `efmCuPme2BProfileEntry 6` }

`efmCuPme2BPower` OBJECT-TYPE

SYNTAX Unsigned32(0|10..42)

UNITS "0.5 dBm"

MAX-ACCESS read-create

STATUS current

DESCRIPTION

"Signal Transmit Power. Multiple of 0.5 dBm.  
The value of 0 in the administrative profile means that the signal transmit power is not fixed and shall be set to maximize the attainable rate, under the spectral limitations placed by the efmCuPme2BRegion and efmCuPme2BsMode.

If a Clause 45 MDIO Interface to the PME is present, then this object maps to the Power1 bits in the 2B PMD parameters register."

## REFERENCE

"IEEE Std 802.3, 45.2.1.43"  
 ::= { efmCuPme2BProfileEntry 7 }

## efmCuPme2BConstellation OBJECT-TYPE

SYNTAX INTEGER {  
 adaptive(0),  
 tcpam16(1),  
 tcpam32(2)  
 }

MAX-ACCESS read-create

STATUS current

## DESCRIPTION

"TCPAM Constellation of the 2BASE-TL PME.

The possible values are:

adaptive(0)	- either 16- or 32-TCPAM
tcpam16(1)	- 16-TCPAM
tcpam32(2)	- 32-TCPAM

The value of adaptive(0) in the administrative profile means that the constellation is not fixed and shall be set to maximize the attainable rate, under the spectral limitations placed by the efmCuPme2BRegion and efmCuPme2BsMode.

If a Clause 45 MDIO Interface to the PME is present, then this object maps to the Constellation1 bits in the 2B general parameter register."

## REFERENCE

"IEEE Std 802.3, 45.2.1.43"  
 ::= { efmCuPme2BProfileEntry 8 }

## efmCuPme2BProfileRowStatus OBJECT-TYPE

SYNTAX RowStatus

MAX-ACCESS read-create

STATUS current

## DESCRIPTION

"This object controls the creation, modification, or deletion of the associated entry in the efmCuPme2BProfileTable per the semantics of RowStatus.

If an 'active' entry is referenced via efmCuAdminProfile or efmCuPmeAdminProfile instance(s), the entry shall remain 'active'.

An 'active' entry shall not be modified. In order to modify an existing entry, it shall be taken out of service (by setting this object to 'notInService'), modified, and set 'active' again."

::= { efmCuPme2BProfileEntry 9 }

## efmCuPme2BsModeTable OBJECT-TYPE

SYNTAX SEQUENCE OF EfmCuPme2BsModeEntry  
 MAX-ACCESS not-accessible  
 STATUS current  
 DESCRIPTION  
 "This table, together with efmCu2BReachRateTable, supports definition of administrative custom spectral modes for 2BASE-TL PMEs, describing spectral limitations in addition to those specified by efmCuPme2BRegion.  
  
 In some countries, spectral regulations (e.g., UK ANFP) limit the length of the loops for certain data rates. This table allows these country-specific limitations to be specified.  
  
 Entries in this table referenced by the efmCuPme2BsMode shall not be deleted until all the active references are removed.  
  
 This table shall be maintained in a persistent manner."

REFERENCE  
 "efmCu2BReachRateTable"  
 ::= { efmCuPme2B 3 }

efmCuPme2BsModeEntry OBJECT-TYPE  
 SYNTAX EfmCuPme2BsModeEntry  
 MAX-ACCESS not-accessible  
 STATUS current  
 DESCRIPTION  
 "Each entry specifies a spectral mode description and its index, which is used to reference corresponding entries in the efmCu2BReachRateTable.  
  
 Entries may be created/deleted using the row creation/deletion mechanism via efmCuPme2BsModeRowStatus."  
 INDEX { efmCuPme2BsModeIndex }  
 ::= { efmCuPme2BsModeTable 1 }

EfmCuPme2BsModeEntry ::= SEQUENCE {  
     efmCuPme2BsModeIndex EfmProfileIndex,  
     efmCuPme2BsModeDescr SnmpAdminString,  
     efmCuPme2BsModeRowStatus RowStatus  
 }

efmCuPme2BsModeIndex OBJECT-TYPE  
 SYNTAX EfmProfileIndex  
 MAX-ACCESS not-accessible  
 STATUS current  
 DESCRIPTION  
 "2BASE-TL PME Spectral Mode index.  
 This object is the unique index associated with this spectral mode.  
 Entries in this table are referenced via the efmCuPme2BsMode object."  
 ::= { efmCuPme2BsModeEntry 1 }

efmCuPme2BsModeDescr OBJECT-TYPE  
 SYNTAX SnmpAdminString  
 MAX-ACCESS read-create  
 STATUS current

## DESCRIPTION

"A textual string containing information about a 2BASE-TL PME spectral mode. The string may include information about corresponding (country-specific) spectral regulations and rate/reach limitations of this particular spectral mode."  
 ::= { efmCuPme2BsModeEntry 2 }

## efmCuPme2BsModeRowStatus OBJECT-TYPE

SYNTAX RowStatus  
 MAX-ACCESS read-create  
 STATUS current  
 DESCRIPTION

"This object controls creation, modification, or deletion of the associated entry in efmCuPme2BsModeTable per the semantics of RowStatus.

If an 'active' entry is referenced via efmCuPme2BsMode instance(s), the entry shall remain 'active'.

An 'active' entry shall not be modified. In order to modify an existing entry, it shall be taken out of service (by setting this object to 'notInService'), modified, and set 'active' again."

::= { efmCuPme2BsModeEntry 3 }

## efmCuPme2BReachRateTable OBJECT-TYPE

SYNTAX SEQUENCE OF EfmCuPme2BReachRateEntry  
 MAX-ACCESS not-accessible  
 STATUS current  
 DESCRIPTION

"This table supports the definition of administrative custom spectral modes for 2BASE-TL PMEs, providing spectral limitations in addition to those specified by efmCuPme2BRegion.

The spectral regulations in some countries (e.g., UK ANFP) limit the length of the loops for certain data rates.

This table allows these country-specific limitations to be specified.

Below is an example of this table for NICC Document ND1602:2005/08:

```
-----+-----+-----
Equivalent MaxRate MaxRate
Length      PAM16   PAM32
(m)         (kb/s)  (kb/s)
-----+-----+-----
    975      2304    5696
   1125      2304    5504
   1275      2304    5120
   1350      2304    4864
   1425      2304    4544
   1500      2304    4288
   1575      2304    3968
   1650      2304    3776
   1725      2304    3520
   1800      2304    3264
   1875      2304    3072
   1950      2048    2688
   2100      1792    2368
```

2250	1536	0
2400	1408	0
2550	1280	0
2775	1152	0
2925	1152	0
3150	1088	0
3375	1024	0

-----+-----+-----

Entries in this table referenced by an efmCuPme2BsMode instance shall not be deleted.

This table shall be maintained in a persistent manner."

REFERENCE

"NICC Document ND1602:2005/08"

::= { efmCuPme2B 4 }

efmCuPme2BReachRateEntry OBJECT-TYPE

SYNTAX EfmCuPme2BReachRateEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Each entry specifies maximum 2BASE-TL PME data rates allowed for a certain equivalent loop length, when using 16-TCPAM or 32-TCPAM encoding.

When a 2BASE-TL PME is initialized, its data rate shall not exceed the following limitations:

- the value of efmCuPme2BMaxDataRate
- maximum data rate allowed by efmCuPme2BRegion and efmCuPme2BPower
- maximum data rate for a given encoding specified in the efmCuPme2BsModeEntry, corresponding to the equivalent loop length, estimated by the PME

efmCuPme2BEquivalentLength values should be assigned in increasing order, starting from the minimum value.

Entries may be created/deleted using the row creation/deletion mechanism via efmCuPme2ReachRateRowStatus."

INDEX { efmCuPme2BsModeIndex, efmCuPme2BReachRateIndex }

::= { efmCuPme2BReachRateTable 1 }

EfmCuPme2BReachRateEntry ::=

```
SEQUENCE {
    efmCuPme2BReachRateIndex      EfmProfileIndex,
    efmCuPme2BEquivalentLength    Unsigned32,
    efmCuPme2BMaxDataRatePam16    Unsigned32,
    efmCuPme2BMaxDataRatePam32    Unsigned32,
    efmCuPme2BReachRateRowStatus  RowStatus
}
```

efmCuPme2BReachRateIndex OBJECT-TYPE

SYNTAX EfmProfileIndex

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"2BASE-TL custom spectral mode Reach-Rate table index.  
This object is the unique index associated with each entry."

```

 ::= { efmCuPme2BReachRateEntry 1 }

efmCuPme2BEquivalentLength OBJECT-TYPE
SYNTAX      Unsigned32(0..8192)
UNITS       "m"
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    "Maximum allowed equivalent loop's physical length in meters
    for the specified data rates.
    An equivalent loop is a hypothetical 26AWG (0.4mm) loop with a
    perfect square root attenuation characteristic, without any
    bridged taps."
 ::= { efmCuPme2BReachRateEntry 2 }

efmCuPme2BMaxDataRatePam16 OBJECT-TYPE
SYNTAX      Unsigned32(0|192..5696)
UNITS       "Kbps"
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    "Maximum data rate for a 2BASE-TL PME at the specified
    equivalent loop's length using TC-PAM16 encoding.
    The value of zero means that TC-PAM16 encoding should not be
    used at this distance."
 ::= { efmCuPme2BReachRateEntry 3 }

efmCuPme2BMaxDataRatePam32 OBJECT-TYPE
SYNTAX      Unsigned32(0|192..5696)
UNITS       "Kbps"
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    "Maximum data rate for a 2BASE-TL PME at the specified
    equivalent loop's length using TC-PAM32 encoding.
    The value of zero means that TC-PAM32 encoding should not be
    used at this distance."
 ::= { efmCuPme2BReachRateEntry 4 }

efmCuPme2BReachRateRowStatus OBJECT-TYPE
SYNTAX      RowStatus
MAX-ACCESS  read-create
STATUS      current
DESCRIPTION
    "This object controls the creation, modification, or deletion
    of the associated entry in the efmCuPme2BReachRateTable per
    the semantics of RowStatus.

    If an 'active' entry is referenced via efmCuPme2BsMode
    instance(s), the entry shall remain 'active'.

    An 'active' entry shall not be modified. In order to modify
    an existing entry, it shall be taken out of service (by setting
    this object to 'notInService'), modified, and set 'active'
    again."
 ::= { efmCuPme2BReachRateEntry 5 }

-- 10PASS-TS specific PME group

```

efmCuPme10P OBJECT IDENTIFIER ::= { efmCuPme 6 }

efmCuPme10PProfileTable OBJECT-TYPE

SYNTAX SEQUENCE OF EfmCuPme10PProfileEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table supports definitions of configuration profiles for 10PASS-TS PMEs.

The first 22 entries in this table shall always be defined as follows (see 802.3ah Annex 62B.3, table 62B-1):

```

-----+-----+-----+-----+-----+-----+-----
Profile Bandplan UPBO BandNotch DRate URate Comment
Index PSDMask# p# p# p# p# p#
-----+-----+-----+-----+-----+-----+-----
  1      1      3  2,6,10,11  20  20 default profile
  2     13      5  0          20  20
  3      1      1  0          20  20
  4     16      0  0          100 100
  5     16      0  0           70  50
  6      6      0  0           50  10
  7     17      0  0           30  30
  8      8      0  0           30   5
  9      4      0  0           25  25
 10      4      0  0           15  15
 11     23      0  0           10  10
 12     23      0  0            5   5
 13     16      0  2,5,9,11  100 100
 14     16      0  2,5,9,11   70  50
 15      6      0  2,6,10,11  50  10
 16     17      0  2,5,9,11  30  30
 17      8      0  2,6,10,11  30   5
 18      4      0  2,6,10,11  25  25
 19      4      0  2,6,10,11  15  15
 20     23      0  2,5,9,11  10  10
 21     23      0  2,5,9,11   5   5
 22     30      0  0          200  50
-----+-----+-----+-----+-----+-----+-----
    
```

These default entries shall be created during agent initialization and shall not be deleted.

Entries following the first 22 can be dynamically created and deleted to provide custom administrative (configuration) profiles and automatic operating profiles.

This table shall be maintained in a persistent manner."

REFERENCE

"IEEE Std 802.3, Annex 62B.3, 30.11.2.1.6"

::= { efmCuPme10P 1 }

efmCuPme10PProfileEntry OBJECT-TYPE

SYNTAX EfmCuPme10PProfileEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"Each entry corresponds to a single 10PASS-TS PME profile.

Each profile contains a set of parameters, used either for

configuration or representation of a 10PASS-TS PME.  
 In case a particular profile is referenced via the efmCuPmeAdminProfile object (or efmCuAdminProfile if efmCuPmeAdminProfile is zero), it represents the desired parameters for the 10PassTS-O PME initialization.  
 If a profile is referenced via an efmCuPmeOperProfile object, it represents the current operating parameters of the PME.

Profiles may be created/deleted using the row creation/deletion mechanism via efmCuPme10PProfileRowStatus. If an 'active' entry is referenced, the entry shall remain 'active' until all references are removed.

Default entries shall not be removed."

```
INDEX { efmCuPme10PProfileIndex }
::= { efmCuPme10PProfileTable 1 }
```

```
EfmCuPme10PProfileEntry ::=
```

```
SEQUENCE {
    efmCuPme10PProfileIndex          EfmProfileIndex,
    efmCuPme10PProfileDescr         SnmpAdminString,
    efmCuPme10PBandplanPSDMskProfile INTEGER,
    efmCuPme10PUPBReferenceProfile  INTEGER,
    efmCuPme10PBandNotchProfiles    BITS,
    efmCuPme10PPayloadDRateProfile  INTEGER,
    efmCuPme10PPayloadURateProfile  INTEGER,
    efmCuPme10PProfileRowStatus     RowStatus
}
```

```
efmCuPme10PProfileIndex OBJECT-TYPE
```

```
SYNTAX      EfmProfileIndex
```

```
MAX-ACCESS not-accessible
```

```
STATUS      current
```

```
DESCRIPTION
```

```
"10PASS-TS PME profile index.
```

```
This object is the unique index associated with this profile.
```

```
Entries in this table are referenced via efmCuAdminProfile or
```

```
efmCuPmeAdminProfile."
```

```
::= { efmCuPme10PProfileEntry 1 }
```

```
efmCuPme10PProfileDescr OBJECT-TYPE
```

```
SYNTAX      SnmpAdminString
```

```
MAX-ACCESS read-create
```

```
STATUS      current
```

```
DESCRIPTION
```

```
"A textual string containing information about a 10PASS-TS PME
```

```
profile. The string may include information about data rate
```

```
and spectral limitations of this particular profile."
```

```
::= { efmCuPme10PProfileEntry 2 }
```

```
efmCuPme10PBandplanPSDMskProfile OBJECT-TYPE
```

```
SYNTAX      INTEGER {
```

```
    profile1(1),
```

```
    profile2(2),
```

```
    profile3(3),
```

```
    profile4(4),
```

```
    profile5(5),
```

```
    profile6(6),
```

```
    profile7(7),
```

```
    profile8(8),
```

```

profile9(9),
profile10(10),
profile11(11),
profile12(12),
profile13(13),
profile14(14),
profile15(15),
profile16(16),
profile17(17),
profile18(18),
profile19(19),
profile20(20),
profile21(21),
profile22(22),
profile23(23),
profile24(24),
profile25(25),
profile26(26),
profile27(27),
profile28(28),
profile29(29),
profile30(30)
}
MAX-ACCESS read-create
STATUS current
DESCRIPTION

```

"The 10PASS-TS PME Bandplan and PSD Mask Profile, as specified in IEEE Std 802.3 Annex 62A, table 62A-1. Possible values are:

Profile Name	PSD Mask	Bands 0/1/2/3/4/5	ITU-T G.993.1 Bandplan
profile1(1)	ANSI T1.424 FTTCab.M1	x/D/U/D/U	A
profile2(2)	ANSI T1.424 FTTEEx.M1	x/D/U/D/U	A
profile3(3)	ANSI T1.424 FTTCab.M2	x/D/U/D/U	A
profile4(4)	ANSI T1.424 FTTEEx.M2	x/D/U/D/U	A
profile5(5)	ANSI T1.424 FTTCab.M1	D/D/U/D/U	A
profile6(6)	ANSI T1.424 FTTEEx.M1	D/D/U/D/U	A
profile7(7)	ANSI T1.424 FTTCab.M2	D/D/U/D/U	A
profile8(8)	ANSI T1.424 FTTEEx.M2	D/D/U/D/U	A
profile9(9)	ANSI T1.424 FTTCab.M1	U/D/U/D/x	A
profile10(10)	ANSI T1.424 FTTEEx.M1	U/D/U/D/x	A
profile11(11)	ANSI T1.424 FTTCab.M2	U/D/U/D/x	A
profile12(12)	ANSI T1.424 FTTEEx.M2	U/D/U/D/x	A
profile13(13)	ETSI TS 101 270-1 Pcab.M1.A	x/D/U/D/U	B
profile14(14)	ETSI TS 101 270-1 Pcab.M1.B	x/D/U/D/U	B
profile15(15)	ETSI TS 101 270-1 Pex.P1.M1	x/D/U/D/U	B
profile16(16)	ETSI TS 101 270-1 Pex.P2.M1	x/D/U/D/U	B
profile17(17)	ETSI TS 101 270-1 Pcab.M2	x/D/U/D/U	B
profile18(18)	ETSI TS 101 270-1 Pex.P1.M2	x/D/U/D/U	B
profile19(19)	ETSI TS 101 270-1 Pex.P2.M2	x/D/U/D/U	B
profile20(20)	ETSI TS 101 270-1 Pcab.M1.A	U/D/U/D/x	B
profile21(21)	ETSI TS 101 270-1 Pcab.M1.B	U/D/U/D/x	B
profile22(22)	ETSI TS 101 270-1 Pex.P1.M1	U/D/U/D/x	B
profile23(23)	ETSI TS 101 270-1 Pex.P2.M1	U/D/U/D/x	B
profile24(24)	ETSI TS 101 270-1 Pcab.M2	U/D/U/D/x	B
profile25(25)	ETSI TS 101 270-1 Pex.P1.M2	U/D/U/D/x	B
profile26(26)	ETSI TS 101 270-1 Pex.P2.M2	U/D/U/D/x	B
profile27(27)	ITU-T G.993.1 F.1.2.1	x/D/U/D/U	Annex F



```

    profile10(10),
    profile11(11)
}
MAX-ACCESS    read-create
STATUS        current
DESCRIPTION
    "The 10PASS-TS PME Egress Control Band Notch Profile bitmap,
    as specified in IEEE Std 802.3 Annex 62A, table 62A-4. Possible
    values are:

```

Profile Name	G.991.3 table	T1.424 table	TS 101 table	270-1	StartF (MHz)	EndF (MHz)
profile0(0)	no profile					
profile1(1)	F-5 #01	-	-		1.810	1.825
profile2(2)	6-2	15-1	17		1.810	2.000
profile3(3)	F-5 #02	-	-		1.907	1.912
profile4(4)	F-5 #03	-	-		3.500	3.575
profile5(5)	6-2	-	17		3.500	3.800
profile6(6)	-	15-1	-		3.500	4.000
profile7(7)	F-5 #04	-	-		3.747	3.754
profile8(8)	F-5 #05	-	-		3.791	3.805
profile9(9)	6-2	-	17		7.000	7.100
profile10(10)	F-5 #06	15-1	-		7.000	7.300
profile11(11)	6-2	15-1	1		10.100	10.150

Any combination of profiles can be specified by ORing individual profiles, for example, a value of 0x2230 selects profiles 2, 6, 10, and 11."

## REFERENCE

```

    "IEEE Std 802.3, Annex 62A.3.5"
    ::= { efmCuPme10PPProfileEntry 5 }

```

```

efmCuPme10PPayloadDRateProfile OBJECT-TYPE

```

```

    SYNTAX      INTEGER {

```

```

        profile5(5),
        profile10(10),
        profile15(15),
        profile20(20),
        profile25(25),
        profile30(30),
        profile50(50),
        profile70(70),
        profile100(100),
        profile140(140),
        profile200(200)
    }

```

```

    MAX-ACCESS    read-create

```

```

    STATUS        current

```

## DESCRIPTION

"The 10PASS-TS PME Downstream Payload Rate Profile, as specified in IEEE Std 802.3 Annex 62A. Possible values are:

```

    profile5(5)      - 2.5 Mb/s
    profile10(10)   - 5 Mb/s
    profile15(15)   - 7.5 Mb/s
    profile20(20)   - 10 Mb/s
    profile25(25)   - 12.5 Mb/s
    profile30(30)   - 15 Mb/s

```

```

profile50(50)    - 25 Mb/s
profile70(70)    - 35 Mb/s
profile100(100)  - 50 Mb/s
profile140(140) - 70 Mb/s
profile200(200) - 100 Mb/s

```

Each value represents a target for the PME's Downstream Payload Bitrate as seen at the MII. If the payload rate of the selected profile cannot be achieved based on the loop environment, bandplan, and PSD mask, the PME initialization shall fail."

## REFERENCE

```

"IEEE Std 802.3, Annex 62A.3.6"
::= { efmCuPme10PProfileEntry 6 }

```

efmCuPme10PPayloadURateProfile OBJECT-TYPE

```

SYNTAX      INTEGER {
profile5(5),
profile10(10),
profile15(15),
profile20(20),
profile25(25),
profile30(30),
profile50(50),
profile70(70),
profile100(100)
}

```

MAX-ACCESS read-create

STATUS current

## DESCRIPTION

"The 10PASS-TS PME Upstream Payload Rate Profile, as specified in 802.3 Annex 62A. Possible values are:

```

profile5(5)      - 2.5 Mb/s
profile10(10)    - 5 Mb/s
profile15(15)    - 7.5 Mb/s
profile20(20)    - 10 Mb/s
profile25(25)    - 12.5 Mb/s
profile30(30)    - 15 Mb/s
profile50(50)    - 25 Mb/s
profile70(70)    - 35 Mb/s
profile100(100) - 50 Mb/s

```

Each value represents a target for the PME's Upstream Payload Bitrate as seen at the MII. If the payload rate of the selected profile cannot be achieved based on the loop environment, bandplan, and PSD mask, the PME initialization shall fail."

## REFERENCE

```

"IEEE Std 802.3, Annex 62A.3.6"
::= { efmCuPme10PProfileEntry 7 }

```

efmCuPme10PProfileRowStatus OBJECT-TYPE

SYNTAX RowStatus

MAX-ACCESS read-create

STATUS current

## DESCRIPTION

"This object controls creation, modification, or deletion of the associated entry in efmCuPme10PProfileTable per the semantics of RowStatus.

If an active entry is referenced via efmCuAdminProfile or efmCuPmeAdminProfile, the entry shall remain 'active' until all references are removed.

An 'active' entry shall not be modified. In order to modify an existing entry, it shall be taken out of service (by setting this object to 'notInService'), modified, and set 'active' again."

```
::= { efmCuPme10PProfileEntry 8 }
```

efmCuPme10PStatusTable OBJECT-TYPE

SYNTAX SEQUENCE OF EfmCuPme10PStatusEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"This table provides status information of EFMCu 10PASS-TS PMEs (modems).

This table contains live data from the equipment. As such, it is not persistent."

```
::= { efmCuPme10P 2 }
```

efmCuPme10PStatusEntry OBJECT-TYPE

SYNTAX EfmCuPme10PStatusEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry in the EFMCu 10PASS-TS PME Status table."

INDEX { ifIndex }

```
::= { efmCuPme10PStatusTable 1 }
```

EfmCuPme10PStatusEntry ::=

```
SEQUENCE {
    efmCuPme10PFECCorrectedBlocks Counter32,
    efmCuPme10PFECUncorrectedBlocks Counter32
}
```

efmCuPme10PFECCorrectedBlocks OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of received and corrected Forward Error Correction (FEC) codewords in this 10PASS-TS PME.

This object maps to the aPMEFECCorrectedBlocks attribute in Clause 30.

If a Clause 45 MDIO Interface to the PMA/PMD is present, then this object maps to the 10P FEC correctable errors register.

Discontinuities in the value of this counter can occur at re-initialization of the management system, and at other times as indicated by the value of ifCounterDiscontinuityTime, defined in IF-MIB."

REFERENCE

"IEEE Std 802.3, 45.2.1.22, 30.11.2.1.8"

```

 ::= { efmCuPme10PStatusEntry 1 }

efmCuPme10PFECUncorrectedBlocks OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The number of received uncorrectable FEC codewords in this
        10PASS-TS PME.

        This object maps to the aPMEFECUncorrectableBlocks attribute
        in Clause 30.

        If a Clause 45 MDIO Interface to the PMA/PMD is present,
        then this object maps to the 10P FEC uncorrectable errors
        register.

        Discontinuities in the value of this counter can occur at
        re-initialization of the management system, and at other times
        as indicated by the value of ifCounterDiscontinuityTime,
        defined in IF-MIB."
    REFERENCE
        "IEEE Std 802.3, 45.2.1.23, 30.11.2.1.9"
 ::= { efmCuPme10PStatusEntry 2 }

--
-- Conformance statements
--

efmCuGroups          OBJECT IDENTIFIER ::= { efmCuConformance 1 }
efmCuCompliances    OBJECT IDENTIFIER ::= { efmCuConformance 2 }

-- Object Groups

efmCuBasicGroup OBJECT-GROUP
    OBJECTS {
        efmCuPAFSupported,
        efmCuAdminProfile,
        efmCuTargetDataRate,
        efmCuTargetSnrMgn,
        efmCuAdaptiveSpectra,
        efmCuPortSide,
        efmCuFltStatus
    }
    STATUS      current
    DESCRIPTION
        "A collection of objects representing management information
        common for all types of EFMCu ports."
 ::= { efmCuGroups 1 }

efmCuPAFGroup OBJECT-GROUP
    OBJECTS {
        efmCuPeerPAFSupported,
        efmCuPAFCapacity,
        efmCuPeerPAFCapacity,
        efmCuPAFAdminState,
        efmCuPAFDiscoveryCode,
        efmCuPAFRemoteDiscoveryCode,

```

```

    efmCuNumPMEs
  }
  STATUS          current
  DESCRIPTION
    "A collection of objects supporting optional PME
    Aggregation Function (PAF) and PAF discovery in EFMCu ports."
  ::= { efmCuGroups 2 }
efmCuPAFErrorsGroup OBJECT-GROUP
  OBJECTS {
    efmCuPAFInErrors,
    efmCuPAFInSmallFragments,
    efmCuPAFInLargeFragments,
    efmCuPAFInBadFragments,
    efmCuPAFInLostFragments,
    efmCuPAFInLostStarts,
    efmCuPAFInLostEnds,
    efmCuPAFInOverflows
  }
  STATUS          current
  DESCRIPTION
    "A collection of objects supporting optional error counters
    of PAF on EFMCu ports."
  ::= { efmCuGroups 3 }

efmCuPmeGroup OBJECT-GROUP
  OBJECTS {
    efmCuPmeAdminProfile,
    efmCuPmeOperStatus,
    efmCuPmeFltStatus,
    efmCuPmeSubTypesSupported,
    efmCuPmeAdminSubType,
    efmCuPmeOperSubType,
    efmCuPAFRemoteDiscoveryCode,
    efmCuPmeOperProfile,
    efmCuPmeSnrMgn,
    efmCuPmePeerSnrMgn,
    efmCuPmeLineAtn,
    efmCuPmePeerLineAtn,
    efmCuPmeEquivalentLength,
    efmCuPmeTCCodingErrors,
    efmCuPmeTCCrcErrors,
    efmCuPmeThreshLineAtn,
    efmCuPmeThreshSnrMgn
  }
  STATUS          current
  DESCRIPTION
    "A collection of objects providing information about
    a 2BASE-TL/10PASS-TS PME."
  ::= { efmCuGroups 4 }

efmCuAlarmConfGroup OBJECT-GROUP
  OBJECTS {
    efmCuThreshLowRate,
    efmCuLowRateCrossingEnable,
    efmCuPmeThreshLineAtn,
    efmCuPmeLineAtnCrossingEnable,
    efmCuPmeThreshSnrMgn,
    efmCuPmeSnrMgnCrossingEnable,
    efmCuPmeDeviceFaultEnable,

```

```

        efmCuPmeConfigInitFailEnable,
        efmCuPmeProtocolInitFailEnable
    }
    STATUS          current
    DESCRIPTION
        "A collection of objects supporting configuration of alarm
        thresholds and notifications in EFMcu ports."
    ::= { efmCuGroups 5 }

efmCuNotificationGroup NOTIFICATION-GROUP
    NOTIFICATIONS {
        efmCuLowRateCrossing,
        efmCuPmeLineAtnCrossing,
        efmCuPmeSnrMgnCrossing,
        efmCuPmeDeviceFault,
        efmCuPmeConfigInitFailure,
        efmCuPmeProtocolInitFailure
    }
    STATUS          current
    DESCRIPTION
        "This group supports notifications of significant conditions
        associated with EFMcu ports."
    ::= { efmCuGroups 6 }

efmCuPme2BProfileGroup OBJECT-GROUP
    OBJECTS {
        efmCuPme2BProfileDescr,
        efmCuPme2BRegion,
        efmCuPme2BsMode,
        efmCuPme2BMinDataRate,
        efmCuPme2BMaxDataRate,
        efmCuPme2BPower,
        efmCuPme2BConstellation,
        efmCuPme2BProfileRowStatus,
        efmCuPme2BsModeDescr,
        efmCuPme2BsModeRowStatus,
        efmCuPme2BEquivalentLength,
        efmCuPme2BMaxDataRatePam16,
        efmCuPme2BMaxDataRatePam32,
        efmCuPme2BReachRateRowStatus
    }
    STATUS          current
    DESCRIPTION
        "A collection of objects that constitute a configuration
        profile for configuration of 2BASE-TL ports."
    ::= { efmCuGroups 7 }

efmCuPme10PProfileGroup OBJECT-GROUP
    OBJECTS {
        efmCuPme10PProfileDescr,
        efmCuPme10PBandplanPSDMskProfile,
        efmCuPme10PUPBReferenceProfile,
        efmCuPme10PBandNotchProfiles,
        efmCuPme10PPayloadDRateProfile,
        efmCuPme10PPayloadURateProfile,
        efmCuPme10PProfileRowStatus
    }
    STATUS          current
    DESCRIPTION

```

```

    "A collection of objects that constitute a configuration
    profile for configuration of 10PASS-TS ports."
 ::= { efmCuGroups 8 }

efmCuPme10PStatusGroup OBJECT-GROUP
OBJECTS {
    efmCuPme10PFECCorrectedBlocks,
    efmCuPme10PFECUncorrectedBlocks
}
STATUS current
DESCRIPTION
    "A collection of objects providing status information
    specific to 10PASS-TS PMEs."
 ::= { efmCuGroups 9 }

-- Compliance statements

efmCuCompliance MODULE-COMPLIANCE
STATUS current
DESCRIPTION
    "The compliance statement for 2BASE-TL/10PASS-TS interfaces.
    Compliance with the following external compliance statements
    is required:

MIB module                Compliance Statement
-----                -
IF-MIB                    ifCompliance3
IEEE8023-EtherLike-MIB   dot3Compliance2
MAU-MIB                   mauModIfComp13

Compliance with the following external compliance statements
is optional for implementations supporting PME Aggregation
Function (PAF) with flexible cross-connect between the PCS
and PME ports:

MIB module                Compliance Statement
-----                -
IF-INVERTED-STACK-MIB   ifInvCompliance
IF-CAP-STACK-MIB       ifCapStackCompliance"

MODULE -- this module
MANDATORY-GROUPS {
    efmCuBasicGroup,
    efmCuPmeGroup,
    efmCuAlarmConfGroup,
    efmCuNotificationGroup
}

GROUP          efmCuPme2BProfileGroup
DESCRIPTION
    "Support for this group is only required for implementations
    supporting 2BASE-TL PHY."

GROUP          efmCuPme10PProfileGroup
DESCRIPTION
    "Support for this group is only required for implementations
    supporting 10PASS-TS PHY."

GROUP          efmCuPAFGroup

```

## DESCRIPTION

"Support for this group is only required for implementations supporting PME Aggregation Function (PAF)."

GROUP efmCuPAFErrorsGroup

## DESCRIPTION

"Support for this group is optional for implementations supporting PME Aggregation Function (PAF)."

GROUP efmCuPme10PStatusGroup

## DESCRIPTION

"Support for this group is optional for implementations supporting 10PASS-TS PHY."

OBJECT efmCuPmeSubTypesSupported

SYNTAX BITS {  
     ieee2BaseTLO(0),  
     ieee2BaseTLR(1),  
     ieee10PassTSO(2),  
     ieee10PassTSR(3)  
 }

## DESCRIPTION

"Support for all subtypes is not required. However, at least one value shall be supported."

OBJECT efmCuPmeAdminSubType

MIN-ACCESS read-only

## DESCRIPTION

"Write access is not required (needed only for PMEs supporting more than a single subtype, e.g., ieee2BaseTLO and ieee2BaseTLR or ieee10PassTSO and ieee10PassTSR)."

OBJECT efmCuTargetSnrMgn

MIN-ACCESS read-only

## DESCRIPTION

"Write access is optional. For PHYs without write access, the target SNR margin shall be fixed at 5dB for 2BASE-TL and 6dB for 10PASS-TS."

OBJECT efmCuAdaptiveSpectra

MIN-ACCESS read-only

## DESCRIPTION

"Write access is optional. For PHYs without write access, the default value should be false."

::= { efmCuCompliances 1 }

END

## 12. Ethernet wide area network (WAN) interface sublayer (WIS) MIB module

This clause defines a portion of the Management Information Base (MIB) for use with SNMP. In particular, it defines objects for managing IEEE Std 802.3 WAN interface sublayers.

### 12.1 Overview

The objects defined in this clause are used in conjunction with objects defined in the Interfaces Group MIB in IETF RFC 2863, the SONET/SDH Interface MIB in IETF RFC 3592, and the IEEE 802.3 MAU MIB defined in Clause 13 of this document to manage the Ethernet WAN interface sublayer (WIS) defined in IEEE Std 802.3. The WIS contains functions to perform OC-192c/VC-4-64c framing and scrambling. It resides between the Physical Coding Sublayer (PCS) and the Physical Medium Attachment (PMA) sublayer within a 10GBASE-W 10 Gb/s WAN-compatible physical layer device (PHY) and may be used in conjunction with any of the PCS, PMA, and Physical Medium Dependent (PMD) sublayers defined in IEEE Std 802.3 for 10GBASE-W PHYs. Three types of 10GBASE-W PHYs are defined, distinguished by the type of optics employed: 10GBASE-SW, 10GBASE-LW, and 10GBASE-EW. The objects defined in this clause may be used to manage an Ethernet interface employing any type of 10GBASE-W PHY. They do not apply to any other kind of interface. In particular, they do not apply to so-called Ethernet Line Terminating Equipment (ELTE) residing within a SONET network element that uses the 10GBASE-W PMA/PMD sublayers but otherwise acts as SONET Line Terminating Equipment (LTE).

The objects presented here—along with those incorporated by reference from the Interfaces Group MIB, the SONET/SDH Interface MIB, and the IEEE 802.3 MAU MIB—are intended to provide exact representations of the mandatory attributes in the oWIS managed object class (i.e., the members of the pWISBasic package) defined in Clause 30 of IEEE Std 802.3. They are also intended to provide approximate representations of the optional attributes (i.e., the members of the pWISOptional package). Some objects with no analogues in oWIS are defined to support WIS testing features required by Clause 50 of IEEE Std 802.3.

#### 12.1.1 Relationship to the SONET/SDH interface MIB

Since the Ethernet WAN interface sublayer was designed to be SONET-compatible, information similar to that provided by most of the members of the oWIS managed object class is available from objects defined in the SONET-MIB in IETF RFC 3592. Thus, the MIB module defined in this clause is a sparse augmentation of the SONET-MIB—in other words, every table defined here is an extension of some table in the SONET-MIB—and its compliance statement REQUIRES that an agent implementing the objects defined in this clause also implement the relevant SONET-MIB objects. That includes all objects required by sonetCompliance2 as well as some that it leaves optional.

It should be noted that some of the objects incorporated by reference from the SONET-MIB—specifically, the threshold objects and interval counter objects—provide only approximate representations of the corresponding oWIS attributes, as detailed in 12.1.6. An alternative approach would have been to define new objects to exactly match the oWIS definitions. That approach was rejected because the SONET-MIB objects are already used in deployed systems to manage the SONET sublayers of ATM over SONET and PPP over SONET interfaces, and it was deemed undesirable to use a different scheme to manage the SONET sublayers of 10 Gb/s WAN-compatible Ethernet interfaces. Note that the approach adopted by this clause requires no hardware support beyond that mandated by 50.3.11 of IEEE Std 802.3.

#### 12.1.2 Relationship to the Ethernet-like interface MIB

An interface that includes the Ethernet WIS is, by definition, an Ethernet-like interface, and an agent implementing the objects defined in this clause shall also implement the objects required by the Ethernet-like interface MIB module defined in Clause 10.

### 12.1.3 Relationship to the IEEE 802.3 MAU MIB

Support for the mauModIfComp13 compliance statement of the MAU-MIB module defined in Clause 13 is required for all Ethernet-like interfaces. The MAU-MIB module is needed in order to allow applications to control and/or determine the media type in use; this is important for devices that can support both the 10GBASE-R 10 Gb/s LAN format (which does not include the WIS) and the 10GBASE-W 10 Gb/s WAN format (which does include the WIS). The MAU-MIB module also provides the means to put a device in standby mode or to reset it; the latter may be used to re-initialize the WIS.

### 12.1.4 Use of the ifTable

This subclause specifies how the ifTable, as defined in IETF RFC 2863, is used for the Ethernet WIS application.

#### 12.1.4.1 Layering model

Ethernet interfaces that employ the WIS are layered as defined in IEEE Std 802.3. The corresponding use of the ifTable defined in IETF RFC 2863 is shown in Figure 12–1.

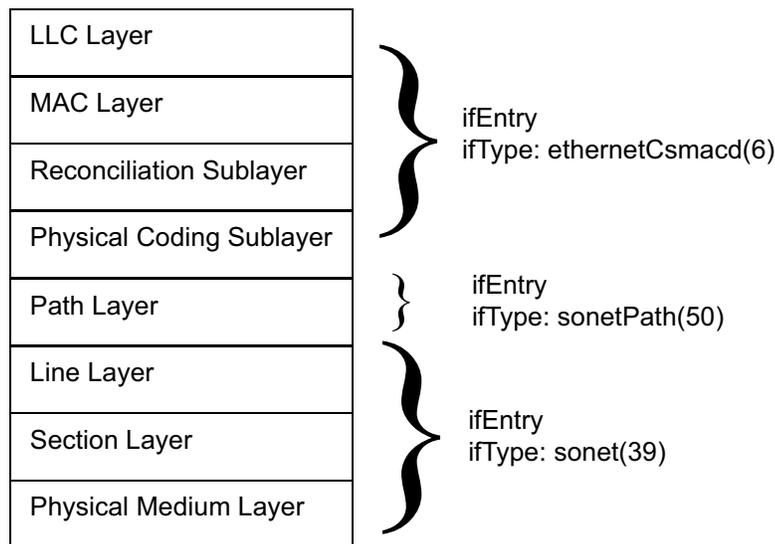


Figure 12–1—Use of ifTable for an Ethernet WIS port

The exact configuration and multiplexing of the layers is maintained in the ifStackTable in IETF RFC 2863 and in the ifInvStackTable in IETF RFC 2864.

#### 12.1.4.2 Use of ifTable for LLC layer/MAC sublayer/reconciliation sublayer/physical coding sublayer

The ifTable shall be used as specified in Clause 10 and Clause 13 for the LLC Layer/MAC sublayer/reconciliation sublayer/physical coding sublayer.

#### 12.1.4.3 Use of ifTable for SONET/SDH path layer

The ifTable shall be used as specified in IETF RFC 3592 for the SONET/SDH path layer. The value of ifHighSpeed is set to 9585. ifSpeed reports a value of 4294967295.

#### 12.1.4.4 Use of ifTable for SONET/SDH medium/section/line layer

The ifTable shall be used as specified in IETF RFC 3592 for the SONET/SDH Medium/Section/Line Layer. The value of ifHighSpeed is set to 9953. ifSpeed reports a value of 4294967295.

#### 12.1.5 SONET/SDH terminology

The SONET/SDH terminology used in IEEE Std 802.3 is mostly the same as in IETF RFC 3592, but there are a few differences. In those cases, the definitions in Clause 3 take precedence.

#### 12.1.6 Mapping of IEEE 802.3 managed objects

Table 12–1 contains the mapping between oWIS managed objects in the pWIS Basic package defined in IEEE Std 802.3 and managed objects defined in this clause and in associated MIB modules, i.e., the IF-MIB in IETF RFC 2863, the SONET-MIB in IETF RFC 3592, and the IEEE 802.3 MAU-MIB module defined in Clause 13 of this document.

**Table 12–1—Mapping of IEEE 802.3 managed objects (pWIS Basic package )**

IEEE 802.3 managed object		Corresponding SNMP object
oWIS - pWISBasic package	aWISID	IF-MIB - ifIndex
	aSectionStatus	SONET-MIB - sonetSectionCurrentStatus
	aLineStatus	SONET-MIB - sonetLineCurrentStatus
	aPathStatus	etherWisPathCurrentStatus
	aFarEndPathStatus	etherWisFarEndPathCurrentStatus

The Unequipped defect is not defined by IEEE Std 802.3.

Table 12–2 contains the same mapping information for the pWIS optional package.

The threshold and counter objects imported from the SONET-MIB are not completely equivalent to the corresponding IEEE 802.3 objects. The specific differences are presented in Table 12–3. Despite the semantic differences between the threshold objects and counter objects imported from the SONET-MIB and the corresponding IEEE 802.3 objects, the hardware support mandated by 50.3.11 of IEEE Std 802.3 suffices for both. See Annex 12A for details.

**Table 12–2—Mapping of IEEE 802.3 managed objects (pWIS optional package)**

IEEE 802.3 managed object		Corresponding SNMP object
oWIS – pWISOptional package	aSectionSESThreshold	SONET-MIB – sonetSESthresholdSe
	aSectionSESs	SONET-MIB – sonetSectionCurrentSESs + sonetSectionIntervalSESs
	aSectionESs	SONET-MIB – sonetSectionCurrentESs + sonetSectionIntervalESs
	aSectionSEFSs	SONET-MIB – sonetSectionCurrentSEFSs + sonetSectionIntervalSEFSs
	aSectionCVs	SONET-MIB – sonetSectionCurrentCVs + sonetSectionIntervalCVs
	aJ0ValueTX	etherWisSectionCurrentJ0Transmitted
	aJ0ValueRX	etherWisSectionCurrentJ0Received
	aLineSESThreshold	SONET-MIB – sonetSESthresholdSet
	aLineSESs	SONET-MIB – sonetLineCurrentSESs + sonetLineIntervalSESs
	aLineESs	SONET-MIB – sonetLineCurrentESs + sonetLineIntervalESs
	aLineCVs	SONET-MIB – sonetLineCurrentCVs + sonetLineIntervalCVs
	aFarEndLineSESs	SONET-MIB – sonetFarEndLineCurrentSESs + sonetFarEndLineIntervalSESs
	aFarEndLineESs	SONET-MIB – sonetFarEndLineCurrentESs + sonetFarEndLineIntervalESs
	aFarEndLineCVs	SONET-MIB – sonetFarEndLineCurrentCVs + sonetFarEndLineIntervalCVs
	aPathSESThreshold	SONET-MIB – sonetSESthresholdSet
	aPathSESs	SONET-MIB – sonetPathCurrentSESs + sonetPathIntervalSESs
	aPathESs	SONET-MIB – sonetPathCurrentESs + sonetPathIntervalESs
	aPathCVs	SONET-MIB – sonetPathCurrentCVs + sonetPathIntervalCVs
	aJ1ValueTX	etherWisPathCurrentJ1Transmitted

**Table 12–2—Mapping of IEEE 802.3 managed objects (pWIS optional package) (continued)**

IEEE 802.3 managed object		Corresponding SNMP object
oWIS - pWISOptional package (continued)	aJ1ValueRX	etherWisPathCurrentJ1Received
	aFarEndPathSESSs	SONET-MIB – sonetFarEndPathCurrentSESSs + sonetFarEndPathIntervalSESSs
	aFarEndPathESs	SONET-MIB – sonetFarEndPathCurrentESs + sonetFarEndPathIntervalESs
	aFarEndPathCVs	SONET-MIB – sonetFarEndPathCurrentCVs + sonetFarEndPathIntervalCVs

**Table 12–3—IEEE 802.3 managed object and SNMP object differences**

IEEE 802.3 managed object	How corresponding SNMP object differs
aSectionSESThreshold	This object is defined in IEEE Std 802.3 as an integer with one instance per interface. sonetSESThresholdSet is an enumerated value that has one instance per network element; it controls the thresholds for all layers simultaneously and allows only certain discrete values to be selected.
aSectionSESSs	This object is defined in IEEE Std 802.3 as a generalized nonresettable counter. The objects sonetSectionCurrentSESSs and sonetSectionIntervalSESSs are 15-minute interval counters.
aSectionESs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3. The objects sonetSectionCurrentESs and sonetSectionIntervalESs are 15-minute interval counters.
aSectionSEFSs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3. The objects sonetSectionCurrentSEFSs and sonetSectionIntervalSEFSs are 15-minute interval counters.
aSectionCVs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetSectionCurrentCVs and sonetSectionIntervalCVs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify as severely errored seconds.
aLineSESThreshold	This object is defined in IEEE Std 802.3 as an integer with one instance per interface. sonetSESThresholdSet is an enumerated value that has one instance per network element; it controls the thresholds for all layers simultaneously and allows only certain discrete values to be selected.
aLineSESSs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetLineCurrentSESSs and sonetLineIntervalSESSs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify as unavailable seconds.
aLineESs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetLineCurrentESs and sonetLineIntervalESs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify as unavailable seconds.

**Table 12–3—IEEE 802.3 managed object and SNMP object differences (continued)**

IEEE 802.3 managed object	How corresponding SNMP object differs
aLineCVs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetLineCurrentCVs and sonetLineIntervalCVs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify either as severely errored seconds or as unavailable seconds.
aFarEndLineSESSs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetFarEndLineCurrentSESSs and sonetFarEndLineIntervalSESSs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify as unavailable seconds
aFarEndLineESSs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetFarEndLineCurrentESSs and sonetFarEndLineIntervalESSs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify as unavailable seconds.
aFarEndLineCVs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetFarEndLineCurrentCVs and sonetFarEndLineIntervalCVs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify either as severely errored seconds or as unavailable seconds.
aPathSESThreshold	This object is defined in IEEE Std 802.3 as an integer with one instance per interface. sonetSESThresholdSet is an enumerated value that has one instance per network element; it controls the thresholds for all layers simultaneously and allows only certain discrete values to be selected.
aPathSESSs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetPathCurrentSESSs and sonetPathIntervalSESSs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify as unavailable seconds. In addition, IEEE Std 802.3 includes PLM-P and LCD-P defects in the criteria for declaring path layer severely errored seconds, while IETF RFC 3592 does not.
aPathESSs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetPathCurrentESSs and sonetPathIntervalESSs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify as unavailable seconds. In addition, IEEE Std 802.3 includes PLM-P and LCD-P defects in the criteria for declaring path layer errored seconds, while IETF RFC 3592 does not
aPathCVs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetPathCurrentCVs and sonetPathIntervalCVs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify either as severely errored seconds or as unavailable seconds

**Table 12–3—IEEE 802.3 managed object and SNMP object differences (continued)**

IEEE 802.3 managed object	How corresponding SNMP object differs
aFarEndPathSESSs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetFarEndPathCurrentSESSs and sonetFarEndPathIntervalSESSs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify as unavailable seconds. In addition, IEEE Std 802.3 includes far-end PLM-P and LCD-P defects in the criteria for declaring far-end path layer severely errored seconds, while IETF RFC 3592 does not.
aFarEndPathESs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetFarEndPathCurrentESs and sonetFarEndPathIntervalESs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify as unavailable seconds. In addition, IEEE Std 802.3 includes far-end PLM-P and LCD-P defects in the criteria for declaring far-end path layer errored seconds, while IETF RFC 3592 does not.
aFarEndPathCVs	This object is defined as a generalized nonresettable counter in IEEE Std 802.3, and it is not subject to inhibiting. The objects sonetFarEndPathCurrentCVs and sonetFarEndPathIntervalCVs are 15-minute interval counters, and they are inhibited (not incremented) during one-second intervals that qualify either as severely errored seconds or as unavailable seconds.

### 12.1.7 Mapping of SNMP objects to WIS station management registers

Some of the objects defined in this clause or incorporated by reference from the SONET-MIB IETF RFC 3592, or the MAU-MIB module defined in Clause 13 require WIS-specific hardware support. 50.3.11 of IEEE Std 802.3 specifies WIS management interface requirements, including a required subset of the WIS Management Data Input/Output (MDIO) registers defined in 45.2.2 of IEEE Std 802.3. Table 12–4 provides a cross-reference between those managed objects and the WIS MDIO registers from the subset in 50.3.11 of IEEE Std 802.3 required to support them. Note that the MDIO interface is optional; however, if it is not implemented, then the capabilities of the required register subset shall be provided by other means.

**Table 12–4—Cross reference between SNMP objects and WIS MDIO registers**

SNMP object	WIS MDIO register(s)
ETHER-WIS - etherWisDeviceTxTestPatternMode	10G WIS control 2
ETHER-WIS - etherWisDeviceRxTestPatternMode	10G WIS control 2
ETHER-WIS - etherWisDeviceRxTestPatternErrors	10G WIS test pattern error counter
SONET-MIB - sonetMediumType	None required
SONET-MIB - sonetMediumTimeElapsed	None required
SONET-MIB - sonetMediumValidIntervals	None required
SONET-MIB - sonetMediumLineCoding	None required
SONET-MIB - sonetMediumLineType	None required

**Table 12–4—Cross reference between SNMP objects and WIS MDIO registers (continued)**

SNMP object	WIS MDIO register(s)
SONET-MIB - sonetMediumCircuitIdentifier	None required
SONET-MIB - sonetMediumInvalidIntervals	None required
SONET-MIB - sonetMediumLoopbackConfig	None required
SONET-MIB - sonetSESthresholdSet	None required
ETHER-WIS - etherWisSectionCurrentJ0Transmitted	10G WIS J0 transmit
ETHER-WIS - etherWisSectionCurrentJ0Received	10G WIS J0 receive
SONET-MIB - sonetSectionCurrentStatus	10G WIS status 3
SONET-MIB - sonetSectionCurrentESs	10G WIS status 3 + 10G WIS section BIP error count
SONET-MIB - sonetSectionCurrentSESs	
SONET-MIB - sonetSectionCurrentSEFSs	
SONET-MIB - sonetSectionCurrentCVs	
SONET-MIB - sonetSectionIntervalESs	
SONET-MIB - sonetSectionIntervalSESs	
SONET-MIB - sonetSectionIntervalSEFSs	
SONET-MIB - sonetSectionIntervalCVs	
SONET-MIB - sonetSectionIntervalValidData	None required
SONET-MIB - sonetLineCurrentStatus	10G WIS status 3
SONET-MIB - sonetLineCurrentESs	10G WIS status 3 + 10G WIS line BIP errors
SONET-MIB - sonetLineCurrentSESs	
SONET-MIB - sonetLineCurrentCVs	
SONET-MIB - sonetLineCurrentUASs	
SONET-MIB - sonetLineIntervalESs	
SONET-MIB - sonetLineIntervalSESs	
SONET-MIB - sonetLineIntervalCVs	
SONET-MIB - sonetLineIntervalUASs	
SONET-MIB - sonetLineIntervalValidData	None required

**Table 12–4—Cross reference between SNMP objects and WIS MDIO registers (continued)**

SNMP object	WIS MDIO register(s)
SONET-MIB - sonetFarEndLineCurrentESs	10G WIS status 3 + 10G WIS far end line BIP errors
SONET-MIB - sonetFarEndLineCurrentSESs	
SONET-MIB - sonetFarEndLineCurrentCVs	
SONET-MIB - sonetFarEndLineCurrentUASs	
SONET-MIB - sonetFarEndLineIntervalESs	
SONET-MIB - sonetFarEndLineIntervalSESs	
SONET-MIB - sonetFarEndLineIntervalCVs	
SONET-MIB - sonetFarEndLineIntervalUASs	
SONET-MIB - sonetFarEndLineIntervalValidData	10G WIS status 3
ETHER-WIS - etherWisPathCurrentStatus	10G WIS status 3
ETHER-WIS - etherWisPathCurrentJ1Transmitted	10G WIS J1 transmit
ETHER-WIS - etherWisPathCurrentJ1Received	10G WIS J1 receive
SONET-MIB - sonetPathCurrentWidth	None required
SONET-MIB - sonetPathCurrentStatus	10G WIS status 3
SONET-MIB - sonetPathCurrentESs	10G WIS status 3 + 10G WIS path block error count
SONET-MIB - sonetPathCurrentSESs	
SONET-MIB - sonetPathCurrentCVs	
SONET-MIB - sonetPathCurrentUASs	
SONET-MIB - sonetPathIntervalESs	
SONET-MIB - sonetPathIntervalCVs	
SONET-MIB - sonetPathIntervalUASs	None required
SONET-MIB - sonetPathIntervalValidData	
ETHER-WIS - etherWisFarEndPathCurrentStatus	10G WIS status 3

**Table 12–4—Cross reference between SNMP objects and WIS MDIO registers (continued)**

SNMP object	WIS MDIO register(s)
SONET-MIB - sonetFarEndPathCurrentESs	10G WIS status 3 + 10G WIS far end path block error count
SONET-MIB - sonetFarEndPathCurrentSESs	
SONET-MIB - sonetFarEndPathCurrentCVs	
SONET-MIB - sonetFarEndPathCurrentUASs	
SONET-MIB - sonetFarEndPathIntervalESs	
SONET-MIB - sonetFarEndPathIntervalSESs	
SONET-MIB - sonetFarEndPathIntervalCVs	
SONET-MIB - sonetFarEndPathIntervalUASs	
SONET-MIB - sonetFarEndPathIntervalValidData	
MAU-MIB - ifMauIfIndex	None required
MAU-MIB - ifMauIndex	None required
MAU-MIB - ifMauType	10G WIS control 2
MAU-MIB - ifMauStatus	WIS control 1
MAU-MIB - ifMauMediaAvailable	WIS status 1 + 10G WIS status 3
MAU-MIB - ifMauMediaAvailableStateExits	
MAU-MIB - ifMauJabberState	None required
MAU-MIB - ifMauJabberingStateEnters	None required
MAU-MIB - ifMauFalseCarriers	None required
MAU-MIB - ifMauDefaultType	10G WIS control 2
MAU-MIB - ifMauAutoNegSupported	none required
MAU-MIB - ifMauTypeListBits	10G WIS status 2

### 12.1.8 Structure of the MIB module

Four tables are defined in this MIB module.

#### 12.1.8.1 etherWisDeviceTable

The purpose of this table is to define managed objects to control the WIS test pattern mode. These objects are required to support mandatory and optional WIS test features specified in 50.3.8 of IEEE Std 802.3.

The etherWisDeviceTable is a sparse augmentation of the sonetMediumTable of the SONET-MIB; in other words, for each entry in the etherWisDeviceTable there shall be an entry in the sonetMediumTable and the same ifIndex value shall be used for both entries.

#### **12.1.8.2 etherWisSectionCurrentTable**

The purpose of this table is to define managed objects for the transmitted and received section trace messages (J0 byte).

The etherWisSectionCurrentTable is a sparse augmentation of the sonetSectionCurrentTable of the SONET-MIB; in other words, for each entry in the etherWisSectionCurrentTable there shall be an entry in the sonetSectionCurrentTable and the same ifIndex value shall be used for both entries.

#### **12.1.8.3 etherWisPathCurrentTable**

The purpose of this table is to define managed objects for the current WIS path layer status and for the transmitted and received path trace messages (J1 byte). The path layer status object is provided because the WIS supports some near-end path status conditions that are not reported in sonetPathCurrentStatus.

The etherWisPathCurrentTable is a sparse augmentation of the sonetPathCurrentTable of the SONET-MIB; in other words, for each entry in the etherWisPathCurrentTable there shall be an entry in the sonetPathCurrentTable and the same ifIndex value shall be used for both entries.

#### **12.1.8.4 etherWisFarEndPathCurrentTable**

The purpose of this table is to define a managed object for the current status of the far end of the path. This object is provided because the WIS supports some far-end path status conditions that are not reported in sonetPathCurrentStatus.

The etherWisFarEndPathCurrentTable is a sparse augmentation of the sonetFarEndPathCurrentTable of the SONET-MIB; in other words, for each entry in the etherWisFarEndPathCurrentTable there shall be an entry in the sonetFarEndPathCurrentTable and the same ifIndex value shall be used for both entries.

### **12.2 Security considerations for Ethernet wide area network (WAN) interface sublayer (WIS) MIB module**

There are five managed objects defined in this MIB module that have a MAX-ACCESS clause of read-write: etherWisDeviceTxTestPatternMode, etherWisDeviceRxTestPatternMode, etherWisDeviceRxTestPatternErrors, etherWisSectionCurrentJ0Transmitted, and etherWisPathCurrentJ1Transmitted. Writing to these objects can have the following potentially disruptive effects on network operation:

- Changing the transmit or receive test pattern mode or modifying the accumulated error count from a PRBS31 pattern test on an administratively disabled 10GBASE-W interface, which can interfere with an in-progress pattern test.
- Modifying the transmitted section trace and/or path trace message on an operational 10GBASE-W interface, which can cause connectivity alarms to be raised at the remote of the link.

The user of this MIB module should therefore be aware that support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations.

The readable objects in this MIB module (i.e., those with MAX-ACCESS other than not-accessible) may be considered sensitive in some environments since, collectively, they provide information about the performance of network interfaces and can reveal some aspects of their configuration. In such environments it is

important to control GET and NOTIFY access to these objects and possibly to encrypt their values when sending them over the network via SNMP.

### 12.3 MIB module definition

An ASCII text version of the MIB definition can be found at the following URL:<sup>19</sup>

[http://www.ieee802.org/3/be/public/mib\\_modules/20110202/802dot3dot1C12mib.txt](http://www.ieee802.org/3/be/public/mib_modules/20110202/802dot3dot1C12mib.txt)

---

<sup>19</sup>Copyright release for MIB modules: Users of this standard may freely reproduce the MIB module contained in this subclause so that it can be used for its intended purpose.

```
IEEE8023-ETHER-WIS-MIB DEFINITIONS ::= BEGIN
```

```
IMPORTS
```

```
  MODULE-IDENTITY, OBJECT-TYPE,
  Gauge32, org
    FROM SNMPv2-SMI
  ifIndex
    FROM IF-MIB
  MODULE-COMPLIANCE, OBJECT-GROUP
    FROM SNMPv2-CONF
  sonetMediumStuff2, sonetSectionStuff2,
  sonetLineStuff2, sonetFarEndLineStuff2,
  sonetPathStuff2, sonetFarEndPathStuff2,
  sonetMediumType, sonetMediumLineCoding,
  sonetMediumLineType, sonetMediumCircuitIdentifier,
  sonetMediumLoopbackConfig, sonetSESthresholdSet,
  sonetPathCurrentWidth
    FROM SONET-MIB;
```

```
ieee8023etherWisMIB MODULE-IDENTITY
```

```
  LAST-UPDATED "201102020000Z" -- February 2, 2011
  ORGANIZATION
    "IEEE 802.3 working group"
  CONTACT-INFO
    "WG-URL: http://www.ieee802.org/3/index.html
    WG-EMail: STDS-802-3-MIB@LISTSERV.IEEE.ORG
```

```
  Contact: Howard Frazier
  Postal: 3151 Zanker Road
          San Jose, CA 95134
          USA
  Tel:    +1.408.922.8164
  E-mail: hfrazier@broadcom.com"
```

```
DESCRIPTION
```

```
"The objects in this MIB module are used in conjunction
with objects in the SONET-MIB module and the MAU-MIB module to manage
the Ethernet WAN Interface Sublayer (WIS) defined in
IEEE Std 802.3.
```

```
Of particular interest are Clause 50, 'WAN Interface
Sublayer (WIS), type 10GBASE-W', Clause 30, '10 Mb/s,
100 Mb/s, 1000 Mb/s, and 10 Gb/s Management, and Link
Aggregation Management', and Clause 45, 'Management
Data Input/Output (MDIO) Interface'."
```

```
REVISION "201102020000Z" -- February 2, 2011
```

```
DESCRIPTION
```

```
"Initial version, based on an earlier version published as RFC 3637."
```

```
::= { org ieee(111) standards-association-numbers-series-standards(2)
      lan-man-stds(802) ieee802dot3(3) ieee802dot3dot1mibs(1) 12 }
```

```
-- The main sections of the module
```

```
etherWisObjects      OBJECT IDENTIFIER ::= { ieee8023etherWisMIB 1 }
```

```
etherWisObjectsPath OBJECT IDENTIFIER ::= { ieee8023etherWisMIB 2 }
```

```

etherWisConformance OBJECT IDENTIFIER ::= { ieee8023etherWisMIB 3 }

-- groups in the Ethernet WIS MIB module

etherWisDevice      OBJECT IDENTIFIER ::= { etherWisObjects 1 }

etherWisSection     OBJECT IDENTIFIER ::= { etherWisObjects 2 }

etherWisPath        OBJECT IDENTIFIER ::= { etherWisObjectsPath 1 }

etherWisFarEndPath  OBJECT IDENTIFIER ::= { etherWisObjectsPath 2 }

-- The Device group

-- These objects provide WIS extensions to
-- the SONET-MIB Medium Group.

etherWisDeviceTable OBJECT-TYPE
    SYNTAX  SEQUENCE OF EtherWisDeviceEntry
    MAX-ACCESS not-accessible
    STATUS  current
    DESCRIPTION
        "The table for Ethernet WIS devices"
    ::= { etherWisDevice 1 }

etherWisDeviceEntry OBJECT-TYPE
    SYNTAX  EtherWisDeviceEntry
    MAX-ACCESS not-accessible
    STATUS  current
    DESCRIPTION
        "An entry in the Ethernet WIS device table. For each
        instance of this object there shall be a corresponding
        instance of sonetMediumEntry."
    INDEX  { ifIndex }
    ::= { etherWisDeviceTable 1 }

EtherWisDeviceEntry ::=
    SEQUENCE {
        etherWisDeviceTxTestPatternMode    INTEGER,
        etherWisDeviceRxTestPatternMode    INTEGER,
        etherWisDeviceRxTestPatternErrors  Gauge32
    }

etherWisDeviceTxTestPatternMode OBJECT-TYPE
    SYNTAX  INTEGER {
        none(1),
        squareWave(2),
        prbs31(3),
        mixedFrequency(4)
    }
    MAX-ACCESS read-write
    STATUS  current
    DESCRIPTION
        "This variable controls the transmit test pattern mode.
        The value none(1) puts the the WIS transmit path into
        the normal operating mode. The value squareWave(2) puts
        the WIS transmit path into the square wave test pattern
        mode described in IEEE Std 802.3, 50.3.8.1.
        The value prbs31(3) puts the WIS transmit path into the

```

PRBS31 test pattern mode described in IEEE Std 802.3 50.3.8.2. The value mixedFrequency(4) puts the WIS transmit path into the mixed frequency test pattern mode described in IEEE Std 802.3, 50.3.8.3. Any attempt to set this object to a value other than none(1) when the corresponding instance of ifAdminStatus has the value up(1) shall be rejected with the error inconsistentValue, and any attempt to set the corresponding instance of ifAdminStatus to the value up(1) when an instance of this object has a value other than none(1) shall be rejected with the error inconsistentValue."

## REFERENCE

"IEEE Std 802.3, 50.3.8, WIS test pattern generator and checker, 45.2.2.6, 10G WIS control 2 register (2.7), and 45.2.2.7.2, PRBS31 pattern testing ability (2.8.1)."

::= { etherWisDeviceEntry 1 }

## etherWisDeviceRxTestPatternMode OBJECT-TYPE

SYNTAX INTEGER {  
     none(1),  
     prbs31(3),  
     mixedFrequency(4)  
 }

MAX-ACCESS read-write

STATUS current

## DESCRIPTION

"This variable controls the receive test pattern mode. The value none(1) puts the the WIS receive path into the normal operating mode. The value prbs31(3) puts the WIS receive path into the PRBS31 test pattern mode described in IEEE Std 802.3, 50.3.8.2. The value mixedFrequency(4) puts the WIS receive path into the mixed frequency test pattern mode described in IEEE Std 802.3, 50.3.8.3. Any attempt to set this object to a value other than none(1) when the corresponding instance of ifAdminStatus has the value up(1) shall be rejected with the error inconsistentValue, and any attempt to set the corresponding instance of ifAdminStatus to the value up(1) when an instance of this object has a value other than none(1) shall be rejected with the error inconsistentValue."

## REFERENCE

"IEEE Std 802.3, 50.3.8, WIS test pattern generator and checker, 45.2.2.6, 10G WIS control 2 register (2.7), and 45.2.2.7.2, PRBS31 pattern testing ability (2.8.1)."

::= { etherWisDeviceEntry 2 }

## etherWisDeviceRxTestPatternErrors OBJECT-TYPE

SYNTAX Gauge32 ( 0..65535 )

MAX-ACCESS read-write

STATUS current

## DESCRIPTION

"This object counts the number of errors detected when the WIS receive path is operating in the PRBS31 test pattern mode. It is reset to zero when the WIS receive path initially enters that mode, and it increments each time the PRBS pattern checker detects an error as described in IEEE Std 802.3, 50.3.8.2 unless its value is 65535, in which case it remains unchanged. This object is writeable so that it may be reset upon explicit request

```

    of a command generator application while the WIS receive
    path continues to operate in PRBS31 test pattern mode."
REFERENCE
    "IEEE Std 802.3, 50.3.8, WIS test pattern generator and
    checker, 45.2.2.7.2, PRBS31 pattern testing ability
    (2.8.1), and 45.2.2.8, 10G WIS test pattern error counter
    register (2.9)."
```

```

 ::= { etherWisDeviceEntry 3 }
-- The Section group

-- These objects provide WIS extensions to
-- the SONET-MIB Section Group.

etherWisSectionCurrentTable OBJECT-TYPE
    SYNTAX SEQUENCE OF EtherWisSectionCurrentEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "The table for the current state of Ethernet WIS sections."
    ::= { etherWisSection 1 }

etherWisSectionCurrentEntry OBJECT-TYPE
    SYNTAX EtherWisSectionCurrentEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "An entry in the etherWisSectionCurrentTable. For each
        instance of this object there shall be a corresponding
        instance of sonetSectionCurrentEntry."
    INDEX { ifIndex }
    ::= { etherWisSectionCurrentTable 1 }

EtherWisSectionCurrentEntry ::=
    SEQUENCE {
        etherWisSectionCurrentJ0Transmitted OCTET STRING,
        etherWisSectionCurrentJ0Received OCTET STRING
    }

etherWisSectionCurrentJ0Transmitted OBJECT-TYPE
    SYNTAX OCTET STRING (SIZE (16))
    MAX-ACCESS read-write
    STATUS current
    DESCRIPTION
        "This is the 16-octet section trace message that
        is transmitted in the J0 byte. The value should
        be '89'h followed by fifteen octets of '00'h
        (or some cyclic shift thereof) when the section
        trace function is not used, and the implementation
        should use that value (or a cyclic shift thereof)
        as a default if no other value has been set."
    REFERENCE
        "IEEE Std 802.3, 30.8.1.1.8, aJ0ValueTX."
    ::= { etherWisSectionCurrentEntry 1 }

etherWisSectionCurrentJ0Received OBJECT-TYPE
    SYNTAX OCTET STRING (SIZE (16))
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION

```

```

        "This is the 16-octet section trace message that
        was most recently received in the J0 byte."
REFERENCE
    "IEEE Std 802.3, 30.8.1.1.9, aJ0ValueRX."
    ::= { etherWisSectionCurrentEntry 2 }

-- The Path group

-- These objects provide WIS extensions to
-- the SONET-MIB Path Group.

etherWisPathCurrentTable OBJECT-TYPE
    SYNTAX SEQUENCE OF EtherWisPathCurrentEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "The table for the current state of Ethernet WIS paths."
    ::= { etherWisPath 1 }

etherWisPathCurrentEntry OBJECT-TYPE
    SYNTAX EtherWisPathCurrentEntry
    MAX-ACCESS not-accessible
    STATUS current
    DESCRIPTION
        "An entry in the etherWisPathCurrentTable. For each
        instance of this object there shall be a corresponding
        instance of sonetPathCurrentEntry."
    INDEX { ifIndex }
    ::= { etherWisPathCurrentTable 1 }

EtherWisPathCurrentEntry ::=
    SEQUENCE {
        etherWisPathCurrentStatus          BITS,
        etherWisPathCurrentJ1Transmitted  OCTET STRING,
        etherWisPathCurrentJ1Received     OCTET STRING
    }

etherWisPathCurrentStatus OBJECT-TYPE
    SYNTAX BITS {
        etherWisPathLOP(0),
        etherWisPathAIS(1),
        etherWisPathPLM(2),
        etherWisPathLCD(3)
    }
    MAX-ACCESS read-only
    STATUS current
    DESCRIPTION
        "This variable indicates the current status of the
        path payload with a bit map that can indicate multiple
        defects at once. The bit positions are assigned as
        follows:

        etherWisPathLOP(0)
            This bit is set to indicate that an
            LOP-P (Loss of Pointer - Path) defect
            is being experienced. When this
            bit is set, sonetPathSTSLOP shall be set
            in the corresponding instance of
            sonetPathCurrentStatus.

```

```

etherWisPathAIS(1)
    This bit is set to indicate that an
    AIS-P (Alarm Indication Signal - Path)
    defect is being experienced. When
    this bit is set, sonetPathSTSAIS shall be
    set in the corresponding instance of
    sonetPathCurrentStatus.

etherWisPathPLM(1)
    This bit is set to indicate that a
    PLM-P (Payload Label Mismatch - Path)
    defect is being experienced. When
    this bit is set, sonetPathSignalLabelMismatch
    shall be set in the corresponding instance of
    sonetPathCurrentStatus.

etherWisPathLCD(3)
    This bit is set to indicate that an
    LCD-P (Loss of Codegroup Delination - Path)
    defect is being experienced. Since this
    defect is detected by the PCS and not by
    the path layer itself, there is no
    corresponding bit in sonetPathCurrentStatus."

```

## REFERENCE

```

"IEEE Std 802.3, 30.8.1.1.18, aPathStatus."
::= { etherWisPathCurrentEntry 1 }

```

## etherWisPathCurrentJ1Transmitted OBJECT-TYPE

```
SYNTAX OCTET STRING (SIZE (16))
```

```
MAX-ACCESS read-write
```

```
STATUS current
```

## DESCRIPTION

```

"This is the 16-octet path trace message that
is transmitted in the J1 byte. The value should
be '89'h followed by fifteen octets of '00'h
(or some cyclic shift thereof) when the path
trace function is not used, and the implementation
should use that value (or a cyclic shift thereof)
as a default if no other value has been set."

```

## REFERENCE

```

"IEEE Std 802.3, 30.8.1.1.23, aJ1ValueTX."
::= { etherWisPathCurrentEntry 2 }

```

## etherWisPathCurrentJ1Received OBJECT-TYPE

```
SYNTAX OCTET STRING (SIZE (16))
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

## DESCRIPTION

```

"This is the 16-octet path trace message that
was most recently received in the J1 byte."

```

## REFERENCE

```

"IEEE Std 802.3, 30.8.1.1.24, aJ1ValueRX."
::= { etherWisPathCurrentEntry 3 }

```

```
-- The Far End Path group
```

```

-- These objects provide WIS extensions to
-- the SONET-MIB Far End Path Group.

```

## etherWisFarEndPathCurrentTable OBJECT-TYPE

```
SYNTAX SEQUENCE OF EtherWisFarEndPathCurrentEntry
```

```

MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "The table for the current far-end state of Ethernet WIS
    paths."
 ::= { etherWisFarEndPath 1 }

etherWisFarEndPathCurrentEntry OBJECT-TYPE
SYNTAX EtherWisFarEndPathCurrentEntry
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION
    "An entry in the etherWisFarEndPathCurrentTable. For each
    instance of this object there shall be a corresponding
    instance of sonetFarEndPathCurrentEntry."
INDEX { ifIndex }
 ::= { etherWisFarEndPathCurrentTable 1 }

EtherWisFarEndPathCurrentEntry ::=
SEQUENCE {
    etherWisFarEndPathCurrentStatus    BITS
}

etherWisFarEndPathCurrentStatus OBJECT-TYPE
SYNTAX BITS {
    etherWisFarEndPayloadDefect(0),
    etherWisFarEndServerDefect(1)
}
MAX-ACCESS read-only
STATUS current
DESCRIPTION
    "This variable indicates the current status at the
    far end of the path using a bit map that can indicate
    multiple defects at once. The bit positions are
    assigned as follows:

    etherWisFarEndPayloadDefect(0)
        A far end payload defect (i.e., far end
        PLM-P or LCD-P) is currently being signaled
        in G1 bits 5-7.

    etherWisFarEndServerDefect(1)
        A far end server defect (i.e., far end
        LOP-P or AIS-P) is currently being signaled
        in G1 bits 5-7. When this bit is set,
        sonetPathSTSRDI shall be set in the corresponding
        instance of sonetPathCurrentStatus."
REFERENCE
    "IEEE Std 802.3, 30.8.1.1.25, aFarEndPathStatus."
 ::= { etherWisFarEndPathCurrentEntry 1 }

--
--     Conformance Statements
--

etherWisGroups          OBJECT IDENTIFIER ::= { etherWisConformance 1 }

etherWisCompliances OBJECT IDENTIFIER ::= { etherWisConformance 2 }

```

```

--      Object Groups

etherWisDeviceGroupBasic OBJECT-GROUP
  OBJECTS {
    etherWisDeviceTxTestPatternMode,
    etherWisDeviceRxTestPatternMode
  }
  STATUS current
  DESCRIPTION
    "A collection of objects that support test
    features required of all WIS devices."
    ::= { etherWisGroups 1 }

etherWisDeviceGroupExtra OBJECT-GROUP
  OBJECTS {
    etherWisDeviceRxTestPatternErrors
  }
  STATUS current
  DESCRIPTION
    "A collection of objects that support
    optional WIS device test features."
    ::= { etherWisGroups 2 }
etherWisSectionGroup OBJECT-GROUP
  OBJECTS {
    etherWisSectionCurrentJ0Transmitted,
    etherWisSectionCurrentJ0Received
  }
  STATUS current
  DESCRIPTION
    "A collection of objects that provide
    required information about a WIS section."
    ::= { etherWisGroups 3 }

etherWisPathGroup OBJECT-GROUP
  OBJECTS {
    etherWisPathCurrentStatus,
    etherWisPathCurrentJ1Transmitted,
    etherWisPathCurrentJ1Received
  }
  STATUS current
  DESCRIPTION
    "A collection of objects that provide
    required information about a WIS path."
    ::= { etherWisGroups 4 }

etherWisFarEndPathGroup OBJECT-GROUP
  OBJECTS {
    etherWisFarEndPathCurrentStatus
  }
  STATUS current
  DESCRIPTION
    "A collection of objects that provide required
    information about the far end of a WIS path."
    ::= { etherWisGroups 5 }

--      Compliance Statements

etherWisCompliance MODULE-COMPLIANCE
  STATUS current

```

## DESCRIPTION

"The compliance statement for interfaces that include the Ethernet WIS. Compliance with the following external compliance statements is prerequisite:

MIB module	Compliance Statement
-----	-----
IF-MIB	ifCompliance3
IF-INVERTED-STACK-MIB	ifInvCompliance
IEEE8023-EtherLike-MIB	dot3Compliance2
MAU-MIB	mauModIfComp13"

MODULE -- this module

```
MANDATORY-GROUPS {
    etherWisDeviceGroupBasic,
    etherWisSectionGroup,
    etherWisPathGroup,
    etherWisFarEndPathGroup
}
```

OBJECT etherWisDeviceTxTestPatternMode

```
SYNTAX INTEGER {
    none(1),
    squareWave(2),
    mixedFrequency(4)
}
```

## DESCRIPTION

"Support for values other than none(1), squareWave(2), and mixedFrequency(4) is not required."

OBJECT etherWisDeviceRxTestPatternMode

```
SYNTAX INTEGER {
    none(1),
    mixedFrequency(4)
}
```

## DESCRIPTION

"Support for values other than none(1) and mixedFrequency(4) is not required."

GROUP etherWisDeviceGroupExtra

## DESCRIPTION

"Implementation of this group, along with support for the value prbs31(3) for etherWisDeviceTxTestPatternMode and etherWisDeviceRxTestPatternMode, is necessary if the optional PRBS31 test pattern mode is to be supported."

OBJECT etherWisDeviceRxTestPatternErrors

```
WRITE-SYNTAX Gauge32 ( 0 )
```

## DESCRIPTION

"An implementation is not required to allow values other than zero to be written to this object."

MODULE SONET-MIB

```
MANDATORY-GROUPS {
    sonetMediumStuff2,
    sonetSectionStuff2,
    sonetLineStuff2,
    sonetFarEndLineStuff2,
    sonetPathStuff2,
```

```

        sonetFarEndPathStuff2
    }

OBJECT      sonetMediumType
SYNTAX      INTEGER {
    sonet(1)
}
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required, nor is support
    for any value other than sonet(1)."
```

```

OBJECT      sonetMediumLineCoding
SYNTAX      INTEGER {
    sonetMediumNRZ(4)
}
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required, nor is support
    for any value other than sonetMediumNRZ(4)."
```

```

OBJECT      sonetMediumLineType
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required."
```

```

OBJECT      sonetMediumCircuitIdentifier
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required."
```

```

OBJECT      sonetMediumLoopbackConfig
SYNTAX      BITS {
    sonetNoLoop(0),
    sonetFacilityLoop(1)
}
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required, nor is support for values
    other than sonetNoLoop(0) and sonetFacilityLoop(1)."
```

```

OBJECT      sonetSESthresholdSet
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required, and only one
    of the enumerated values need be supported."
```

```

OBJECT      sonetPathCurrentWidth
SYNTAX      INTEGER {
    sts192cSTM64(6)
}
MIN-ACCESS  read-only
DESCRIPTION
    "Write access is not required, nor is support
    for any value other than sts192cSTM64(6)."
```

```

 ::= { etherWisCompliances 1 }
```

END

## Annex 12A

(informative)

### Collection of performance data using WIS MDIO registers

The purpose of this annex is to illustrate how the WIS MDIO registers specified in IEEE Std 802.3.45.2.2 (and more specifically the subset required by IEEE Std 802.3 50.3.11) can be used to collect performance data either according to the conventions adopted by this document or according to the conventions specified in IEEE Std 802.3 Clause 30.

For an agent implementing the SNMP managed objects required by this document, the first step in collecting WIS performance data would be to poll the 10G WIS status 3 register and the various error count registers (10G WIS section BIP error count, 10G WIS line BIP errors, 10G WIS far end line BIP errors, 10G WIS path block error count, and 10G WIS far end path block error count) once per second. The 10G WIS status 3 register bits are all latched until read and so would indicate whether a given defect occurred any time during the previous second. The error count registers roll over modulo  $2^{16}$  or  $2^{32}$ , and so to find the number of errors within the previous second the agent would need to subtract (modulo  $2^{16}$  or  $2^{32}$ ) the current reading from the reading taken one second ago. Armed with that information, the agent could determine for any layer whether the one second interval was an errored second, a severely errored second (that requires comparison with a threshold unless a defect is present), or a severely errored frame second. Determining whether a given second is or is not part of unavailable time requires additional logic; the most straightforward and accurate method is the delay-line approach outlined in Appendix A of IETF RFC 3592. With that information available the agent would be able to determine by how much each current count should be incremented (including effects of inhibiting). Implementations that conform to ANSI T1.231-1997 would end each 15-minute interval on time-of-day clock 1/4 hour boundaries; if the delay-line approach is used, then a time-of-day timestamp would accompany the one-second statistics. At the end of each interval, the current registers would be pushed onto the history stack and then would be cleared. The `xyxIntervalValidData` flags would be set to `False(2)` if the number of samples was not between 890 and 910 or, in the case of far-end counts, if a near-end defect occurred during the just-completed interval (see ANSI T1.231-1997 Section 9.1.2.2 for details).

An agent implementing the IEEE Std 802.3 Clause 30 oWIS objects could also start by polling the 10G WIS status 3 register and the various error count registers to find the defects and error counts for the previous second, and it could determine the number of errors and whether the second was an errored second, a severely errored second, or a severely errored frame second in the same manner as above. The rest of the process would simply be to increment the generalized non-resettable counters without consideration of any inhibiting rules.



## 13. Ethernet medium attachment units (MAUs) MIB module

### 13.1 Introduction

This clause defines a portion of the Management Information Base (MIB) for use with SNMP. In particular, it defines objects for managing IEEE 802.3 medium attachment units (MAUs).

A previous version of this clause, IETF RFC 3636, defined a single MIB module. IETF RFC 4836 split the original MIB module into two, putting frequently updated object identities and textual conventions into a separate, IANA-maintained MIB module, in order to decrease the need of updating the basic MAU-MIB module. The MIB module defined in this clause incorporates the IANA-MAU-MIB module by reference.

### 13.2 Overview

Instances of these object types represent attributes of an IEEE 802.3 MAU. Several types of MAUs are defined in IEEE Std 802.3. These MAUs may be connected to IEEE 802.3 repeaters or to IEEE 802.3 (Ethernet-like) interfaces. For convenience, this clause refers to these devices as “repeater MAUs” and “interface MAUs.”

The definitions presented here are based on 30.5 and 30.6 of IEEE Std 802.3. This specification is intended to provide for management of all types of Ethernet/IEEE 802.3 MAUs.

#### 13.2.1 Relationship to IETF RFC 3636 and IETF RFC 4836

The management definitions provided in this clause are intended to be a superset of those defined by IETF RFC 3636 and IETF RFC 4836.

In order to decrease the need of updating the basic MAU MIB module due to the new MAU type, Media Available state, Auto Negotiation capability and/or Jack type introduction, all relevant object identities and textual conventions have been moved to a separate, IANA-maintained MIB module, IANA-MAU-MIB. Thus when a new MAU type, Media Available state, Auto Negotiation capability, and/or Jack type is defined by the IEEE 802.3 working group, only the IANA-maintained module needs to be revised, leaving the basic MAU-MIB module defined in this clause unchanged.

The changes made in this revision are not entirely backward-compatible with MIB modules that currently import MAU type object identity descriptors from the MAU-MIB; such modules need to be revised to import those DESCRIPTORS from the IANA-MAU-MIB. Similarly, any management applications that process the object identity definitions (e.g., to present the DESCRIPTION text to a user) need to get those definitions from the IANA-MAU-MIB instead of the MAU-MIB. While it is true that changes that require such adjustments are not strictly compliant with the SMIv2 rules governing MIB module revisions (see IETF STD 58, RFC 2578 Section 10), in this case continued high maintenance costs that would result from not making these changes make the deviation from the rules justified.

#### 13.2.2 Relationship to other MIBs

It is assumed that an agent implementing the MAU-MIB module will also implement (at least) the ‘system’ group defined in the SNMPv2 MIB of IETF RFC 3418. The following subclauses identify other MIBs that such an agent should implement.

### 13.2.2.1 Relationship to the Interfaces Group MIB

The subclauses of this clause that define interface MAU-related objects specify an extension to the Interfaces Group MIB of IETF RFC 2863. An agent implementing these interface-MAU related objects shall also implement the relevant groups of the ifCompliance3 MODULE-COMPLIANCE statement of the Interfaces Group MIB. The value of the object ifMauIfIndex is the same as the value of ‘ifIndex’ used to instantiate the interface to which the given MAU is connected.

An agent implementing the interface-MAU related objects in the MAU-MIB module shall also fully comply with the dot3Compliance2 MODULE-COMPLIANCE statement of the Ethernet-like interface MIB defined in Clause 10. Furthermore, when the interface-MAU related objects are used to manage a 10GBASE-W PHY—i.e., when ifMauType is equal to dot3MauType10GigBaseW or any other 10GBASE-W variant—then the agent shall also support the Ethernet WAN Interface Sublayer (WIS) MIB module defined in Clause 12, and shall follow the interface layering model specified therein. In that case the value of the object ifMauIfIndex is the same as the value of ‘ifIndex’ for the layer at the top of the stack, i.e., for the ifTable entry that has ‘ifType’ equal to ethernetCsmacd(6). If the interface-MAU related objects are used to manage a PHY that allows the MAU type to be changed dynamically, then the agent shall create ifTable, ifStackTable, and ifInvStackTable entries that pertain to the WIS when ifMauDefaultType is changed to a 10GBASEW variant (i.e., one of dot3MauType10GigBaseW, dot3MauType10GigBaseEW, dot3MauType10GigBaseLW, or dot3MauType10GigBaseSW) from any other type, and shall destroy the WIS-related entries when ifMauDefaultType is changed to a non-10GBASE-W type. The agent shall also change the values of ‘ifConnectorPresent’ and ‘ifHighSpeed’ in the ifTable entry indexed by ifMauIfIndex as specified in Clause 10 and Clause 12 when ifMauDefaultType is manipulated in this way, but shall NOT otherwise alter that entry.

NOTE—Repeater ports are not represented as interfaces in the Interfaces Group MIB.

### 13.2.2.2 Relationship to the IEEE 802.3 repeater MIB module

The subclause of this clause that defines repeater MAU-related objects specifies an extension to the IEEE 802.3 repeater MIB module defined in Clause 7. An agent implementing these repeater-MAU related objects shall also comply with the snmpRptrModCompl compliance statement of the IEEE 802.3 repeater MIB module.

The values of ‘rpMauGroupIndex’ and ‘rpMauPortIndex’ used to instantiate a repeater MAU variable shall be the same as the values of ‘rptrPortGroupIndex’ and ‘rptrPortIndex’ used to instantiate the port to which the given MAU is connected.

### 13.2.3 Management of internal MAUs

In some situations, a MAU can be “internal”, i.e., its functionality is implemented entirely within a device. For example, a managed repeater may contain an internal repeater-MAU and/or an internal interface-MAU through which management communications originating on one of the repeater’s external ports pass, in order to reach the management agent associated with the repeater. Such internal MAUs may or may not be managed. If they are managed, objects describing their attributes should appear in the appropriate MIB subtree: dot3RpMauBasicGroup for internal repeater-MAUs and dot3IfMauBasicGroup for internal interface-MAUs.

### 13.2.4 Mapping of IEEE 802.3 managed objects

Table 13–1 depicts the mapping between relevant managed objects (attributes) defined in IEEE Std 802.3 Clause 30, and managed objects defined in this clause.]

**Table 13–1—Mapping of IEEE 802.3 managed objects**

IEEE 802.3 managed object		Corresponding SNMP object
oMAU	.aMAUID	rpMauIndex or ifMauIndex or broadMauIndex
	.aMAUType	rpMauType or ifMauType
	.aMAUTypeList	ifMauTypeListBits
	.aMediaAvailable	rpMauMediaAvailable or ifMauMediaAvailable
	.aLoseMediaCounter	rpMauMediaAvailableStateExits or ifMauMediaAvailableStateExits
	.aJabber	rpMauJabberState and rpMauJabberingStateEnters or ifMauJabberState and ifMauJabberingStateEnters
	.aMAUAdminState	rpMauStatus or ifMauStatus
	.aFalseCarriers	rpMauFalseCarriers or ifMauFalseCarriers
	.acResetMAU	rpMauStatus or ifMauStatus
	.acMAUAdminControl	rpMauStatus or ifMauStatus
	.nJabber	rpMauJabberTrap or ifMauJabberTrap
oAutoNegotiation	.aAutoNegID	ifMauIndex
	.aAutoNegAdminState	ifMauAutoNegAdminStatus
	.aAutoNegRemoteSignalling	ifMauAutoNegRemoteSignalling
	.aAutoNegAutoConfig	ifMauAutoNegConfig
	.aAutoNegLocalTechnologyAbility	ifMauAutoNegCapabilityBits
	.aAutoNegAdvertisedTechnologyAbility	ifMauAutoNegAdvertisedBits and ifMauAutoNegRemoteFaultAdvertised
	.aAutoNegReceivedTechnologyAbility	ifMauAutoNegReceivedBits and ifMauAutoNegRemoteFaultReceived
	.acAutoNegRestartAutoConfig	ifMauAutoNegRestart
	.acAutoNegAdminControl	ifMauAutoNegAdminStatus

Table 13–2 depicts the IEEE 802.3 managed objects that have not been included in the MAU-MIB module, and the reason for the exclusion.

**Table 13–2—Unmapped IEEE 802.3 managed objects**

IEEE 802.3 managed object		Reason for exclusion
oMAU	.aIdleErrorCount	Only useful for 100BaseT2, which is not widely implemented
oAutoNegotiation	.aAutoNegLocalSelectorAbility	Only needed for support of isoethernet (IEEE 802.9a), which is not supported by MAU-MIB
	.aAutoNegAdvertisedSelectorAbility	
	.aAutoNegReceivedSelectorAbility	

### 13.2.5 Addition of new MAU types

#### 13.2.5.1 dot3MauType OBJECT-IDENTITIES

The dot3MauType OBJECT IDENTIFIER and its OBJECT-IDENTITY definitions has been moved from the MAU-MIB module into the IANA-maintained IANA-MAU-MIB module.

When a new IEEE 802.3 MAU is defined, IANA can re-issue a version of IANA-MAU-MIB module with the new dot3MauType OBJECT-IDENTITY and its matching IANAifMauTypeListBits textual convention value and, possibly, with new IANAifMauMediaAvailable, IANAifMauAutoNegCapBits, and/or IANAif-JackType values.

An Expert Review, as defined in IETF RFC 2434, is required for the addition of the new MAU, Media Available states, Auto Negotiation capabilities, and/or Jack types.

In some cases, new MAU types may require additional managed objects or may have side effects on the behavior of existing managed objects. In such cases a standards-track specification (which may be a new document or a revision of this document) is also required. Any such document is required to note any special properties of the MAU types that it defines—for example, side effects on the ifStackTable as noted in this document for 10GBASE-W MAUs.

#### 13.2.5.2 IANAifMauTypeListBits TEXTUAL-CONVENTION

The syntax of ifMauTypeListBits is changed to be a textual convention, such that the enumerated integer values are now defined in the textual convention IANAifMauTypeListBits, which can be re-specified (with additional values, when defined by IEEE 802.3) in the IANA-maintained MIB module without issuing a new version of this document.

#### 13.2.5.3 IANAifMauMediaAvailable TEXTUAL-CONVENTION

The syntax of ifMauMediaAvailable and rpMauMediaAvailable is changed to be a textual convention, such that the enumerated integer values are now defined in the textual convention IANAifMauMediaAvailable, which can be re-specified (with additional values, when defined by IEEE 802.3) in the IANA-maintained MIB module without issuing a new version of this document.

#### 13.2.5.4 IANAifMauAutoNegCapBits TEXTUAL-CONVENTION

The syntax of ifMauAutoNegCapabilityBits, ifMauAutoNegCapAdvertisedBits, and ifMauAutoNegCapReceivedBits objects is changed to be a textual convention, such that the enumerated integer values are now defined in the textual convention IANAifMauAutoNegCapBits, which can be re-specified (with additional

values, when defined by IEEE 802.3) in the IANA-maintained MIB module without issuing a new version of this document.

#### 13.2.5.5 JackType TEXTUAL-CONVENTION

The JackType Textual Convention has been deprecated in favor of the IANAifJackType defined in the IANA-maintained MIB module, so the new Jack types can be added (when defined by IEEE 802.3) without issuing a new version of this document.

### 13.3 Security considerations for Ethernet medium attachment units (MAUs) MIB module

The IANA-MAU-MIB module does not define any management objects. Instead, it defines a set of textual conventions that are used by the MAU-MIB module and may be used by other MIB modules to define management objects. Meaningful security considerations can only be written for MIB modules that define management objects.

There are a number of management objects defined in the MAU-MIB module that have a MAX-ACCESS clause of read-write. Setting these objects can have a serious effect on the operation of the network, including:

- Enabling or disabling a MAU
- Changing a MAU's default type
- Enabling, disabling, or restarting autonegotiation
- Modifying the capabilities that a MAU advertises during autonegotiation.

Such objects may be considered sensitive or vulnerable in some network environments. The support for SET operations in a non-secure environment without proper protection can have a negative effect on network operations.

Some of the readable objects in the MAU-MIB module (i.e., objects with a MAX-ACCESS other than not-accessible) may be considered sensitive or vulnerable in some network environments. In some environments, it may be undesirable to allow unauthorized parties to access statistics or status information about individual links in a network. It is thus important to control GET and/or NOTIFY access to these objects and possibly to encrypt the values of these objects when sending them over the network via SNMP.

### 13.4 IANA considerations

It is intended that each new MAU type, Media Available state, Auto Negotiation capability, and/or Jack type defined by the IEEE 802.3 working group and approved for publication in a revision of IEEE Std 802.3 will be added to the IANA-maintained MIB module, provided that it is suitable for being managed by the base objects in the MAU-MIB module.

For each new MAU type added, a short description of the MAU technology and, wherever possible, a reference to a publicly available specification should be specified. An Expert Review, as defined in IETF RFC 2434, is required, for each modification.

### 13.5 MIB module definition

An ASCII text version of the MIB definition can be found at the following URL:<sup>20</sup>

[http://www.ieee802.org/3/be/public/mib\\_modules/20110202/802dot3dot1C13mib.txt](http://www.ieee802.org/3/be/public/mib_modules/20110202/802dot3dot1C13mib.txt)

The IANA-MAU-MIB module can be found at the following URL:

<http://www.iana.org/assignments/ianamau-mib>

---

<sup>20</sup>Copyright release for MIB modules: Users of this standard may freely reproduce the MIB module contained in this subclause so that it can be used for its intended purpose.

```

IEEE8023-MAU-MIB DEFINITIONS ::= BEGIN

IMPORTS
    Counter32, Integer32, Counter64,
    OBJECT-TYPE, MODULE-IDENTITY, NOTIFICATION-TYPE, org
        FROM SNMPv2-SMI          -- RFC 2578
    TruthValue, AutonomousType
        FROM SNMPv2-TC          -- RFC 2579
    OBJECT-GROUP, MODULE-COMPLIANCE, NOTIFICATION-GROUP
        FROM SNMPv2-CONF        -- RFC 2580
    InterfaceIndex
        FROM IF-MIB             -- RFC 2863
    IANAifMauTypeListBits, IANAifMauMediaAvailable,
    IANAifMauAutoNegCapBits, IANAifJackType
        FROM IANA-MAU-MIB
        -- http://www.iana.org/assignments/ianamau-mib
;

ieee8023mauMIB MODULE-IDENTITY
    LAST-UPDATED "201102020000Z" -- February 2, 2011
    ORGANIZATION
        "IEEE 802.3 working group"
    CONTACT-INFO
        "WG-URL: http://www.ieee802.org/3/index.html
        WG-EMail: STDS-802-3-MIB@LISTSERV.IEEE.ORG

        Contact: Howard Frazier
        Postal: 3151 Zanker Road
              San Jose, CA 95134
              USA
        Tel: +1.408.922.8164
        E-mail: hfrazier@broadcom.com"
DESCRIPTION
    "Management information for 802.3 MAUs."

    REVISION      "201102020000Z" -- February 2, 2011
    DESCRIPTION
        "Initial version, based on an earlier version published as RFC 4836."

    ::= { org ieee(111) standards-association-numbers-series-standards(2)
          lan-man-stds(802) ieee802dot3(3) ieee802dot3dot1mibs(1) 13 }

ieee8023snmpDot3MauMgt OBJECT IDENTIFIER ::= { ieee8023mauMIB 1 }

dot3RpMauBasicGroup
    OBJECT IDENTIFIER ::= { ieee8023snmpDot3MauMgt 1 }
dot3IfMauBasicGroup
    OBJECT IDENTIFIER ::= { ieee8023snmpDot3MauMgt 2 }
-- The following object is a placeholder
-- to preserve the arc assignments that follow it.
dot3PlaceholderGroup
    OBJECT IDENTIFIER ::= { ieee8023snmpDot3MauMgt 3 }

-- OIDs under the following branch are reserved for
-- the IANA-MAU-MIB to assign as MAU type values:
--
-- { ieee8023snmpDot3MauMgt 4 }

dot3IfMauAutoNegGroup

```

```

OBJECT IDENTIFIER ::= { ieee8023snmpDot3MauMgt 5 }

--
-- The Basic Repeater MAU Table
--

rpMauTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF RpMauEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "Table of descriptive and status information
                about the MAU(s) attached to the ports of a
                repeater."
    ::= { dot3RpMauBasicGroup 1 }

rpMauEntry OBJECT-TYPE
    SYNTAX      RpMauEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "An entry in the table, containing information
                about a single MAU."
    INDEX       { rpMauGroupIndex,
                rpMauPortIndex,
                rpMauIndex
                }
    ::= { rpMauTable 1 }

RpMauEntry ::=
    SEQUENCE {
        rpMauGroupIndex      Integer32,
        rpMauPortIndex       Integer32,
        rpMauIndex           Integer32,
        rpMauType             AutonomousType,
        rpMauStatus           INTEGER,
        rpMauMediaAvailable  IANAifMauMediaAvailable,
        rpMauMediaAvailableStateExits Counter32,
        rpMauJabberState     INTEGER,
        rpMauJabberingStateEnters Counter32,
        rpMauFalseCarriers   Counter32
    }

rpMauGroupIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "This variable uniquely identifies the group
                containing the port to which the MAU described
                by this entry is connected.

                Note: In practice, a group will generally be
                a field-replaceable unit (i.e., module, card,
                or board) that can fit in the physical system
                enclosure, and the group number will correspond
                to a number marked on the physical enclosure.

                The group denoted by a particular value of this
                object is the same as the group denoted by the
                same value of rpMauGroupIndex."
    REFERENCE   "RFC 2108, rpMauGroupIndex."

```

```

 ::= { rpMauEntry 1 }

rpMauPortIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "This variable uniquely identifies the repeater
                port within group rpMauGroupIndex to which the
                MAU described by this entry is connected."
    REFERENCE   "RFC 2108, rpMauPortIndex."
    ::= { rpMauEntry 2 }

rpMauIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "This variable uniquely identifies the MAU
                described by this entry from among other
                MAUs connected to the same port
                (rpMauPortIndex)."
    REFERENCE   "IEEE Std 802.3, 30.5.1.1.1, aMAUID."
    ::= { rpMauEntry 3 }

rpMauType OBJECT-TYPE
    SYNTAX      AutonomousType
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "This object identifies the MAU type. Values for
                standard IEEE 802.3 MAU types are defined in the
                IANA maintained IANA-MAU-MIB module, as
                OBJECT-IDENTITIES of dot3MauType.
                If the MAU type is unknown, the object identifier
                zeroDotZero is returned."
    REFERENCE   "IEEE Std 802.3, 30.5.1.1.2, aMAUType."
    ::= { rpMauEntry 4 }

rpMauStatus OBJECT-TYPE
    SYNTAX      INTEGER {
                other(1),
                unknown(2),
                operational(3),
                standby(4),
                shutdown(5),
                reset(6)
                }
    MAX-ACCESS  read-write
    STATUS      current
    DESCRIPTION "The current state of the MAU. This object may
                be implemented as a read-only object by those
                agents and MAUs that do not implement software
                control of the MAU state. Some agents may not
                support setting the value of this object to some
                of the enumerated values.

                The value other(1) is returned if the MAU is in
                a state other than one of the states 2 through
                6.
                The value unknown(2) is returned when the MAU's
                true state is unknown; for example, when it is

```

being initialized.

A MAU in the operational(3) state is fully functional; it operates, and passes signals to its attached DTE or repeater port in accordance to its specification.

A MAU in standby(4) state forces DI and CI to idle, and the media transmitter to idle or fault, if supported. Standby(4) mode only applies to link type MAUs. The state of rpMauMediaAvailable is unaffected.

A MAU in shutdown(5) state assumes the same condition on DI, CI, and the media transmitter, as though it were powered down or not connected. The MAU may return other(1) value for the rpMauJabberState and rpMauMediaAvailable objects when it is in this state. For an AUI, this state will remove power from the AUI.

Setting this variable to the value reset(6) resets the MAU in the same manner as a power-off, power-on cycle of at least one-half second would. The agent is not required to return the value reset(6).

Setting this variable to the value operational(3), standby(4), or shutdown(5) causes the MAU to assume the respective state, except that setting a mixing-type MAU or an AUI to standby(4) will cause the MAU to enter the shutdown state."

REFERENCE "IEEE Std 802.3, 30.5.1.1.7, aMAUAdminState, 30.5.1.2.2, acMAUAdminControl, and 30.5.1.2.1, acResetMAU."

::= { rpMauEntry 5 }

rpMauMediaAvailable OBJECT-TYPE

SYNTAX IANAifMauMediaAvailable

MAX-ACCESS read-only

STATUS current

DESCRIPTION "This object identifies Media Available state of the MAU, complementary to the rpMauStatus. Values for the standard IEEE 802.3 Media Available states are defined in the IANA maintained IANA-MAU-MIB module, as IANAifMauMediaAvailable TC."

REFERENCE "IEEE Std 802.3, 30.5.1.1.4, aMediaAvailable."

::= { rpMauEntry 6 }

rpMauMediaAvailableStateExits OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of the number of times that rpMauMediaAvailable for this MAU instance leaves the state available(3).

Discontinuities in the value of this counter can

occur at re-initialization of the management system and at other times, as indicated by the value of `rpTrMonitorPortLastChange`."

REFERENCE "IEEE Std 802.3, 30.5.1.1.5, `aLoseMediaCounter`. RFC 2108, `rpTrMonitorPortLastChange`"

::= { `rpMauEntry` 7 }

`rpMauJabberState` OBJECT-TYPE

SYNTAX INTEGER {  
     other(1),  
     unknown(2),  
     noJabber(3),  
     jabbering(4)  
 }

MAX-ACCESS read-only

STATUS current

DESCRIPTION "The value other(1) is returned if the jabber state is not 2, 3, or 4. The agent shall always return other(1) for MAU type `dot3MauTypeAUI`.

The value unknown(2) is returned when the MAU's true state is unknown; for example, when it is being initialized.

If the MAU is not jabbering the agent returns `noJabber(3)`. This is the 'normal' state.

If the MAU is in jabber state the agent returns the `jabbering(4)` value."

REFERENCE "IEEE Std 802.3, 30.5.1.1.6, `aJabber.jabberFlag`."  
 ::= { `rpMauEntry` 8 }

`rpMauJabberingStateEnters` OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of the number of times that `mauJabberState` for this MAU instance enters the state `jabbering(4)`. For MAUs of type `dot3MauTypeAUI`, `dot3MauType100BaseT4`, `dot3MauType100BaseTX`, `dot3MauType100BaseFX`, and all 1000 Mb/s types, this counter will always indicate zero.

Discontinuities in the value of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of `rpTrMonitorPortLastChange`."

REFERENCE "IEEE Std 802.3, 30.5.1.1.6, `aJabber.jabberCounter`. RFC 2108, `rpTrMonitorPortLastChange`"

::= { `rpMauEntry` 9 }

`rpMauFalseCarriers` OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of the number of false carrier events during IDLE in 100BASE-X links. This counter does not increment at the symbol rate. It can

increment after a valid carrier completion at a maximum rate of once per 100 ms until the next carrier event.

This counter increments only for MAUs of type dot3MauType100BaseT4, dot3MauType100BaseTX, dot3MauType100BaseFX, and all 1000 Mb/s types.

For all other MAU types, this counter will always indicate zero.

The approximate minimum time for rollover of this counter is 7.4 hours.

Discontinuities in the value of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of rpTrMonitorPortLastChange."

REFERENCE "IEEE Std 802.3, 30.5.1.1.10, aFalseCarriers.  
RFC 2108, rpTrMonitorPortLastChange"

::= { rpMauEntry 10 }

-- The rpJackTable applies to MAUs attached to repeaters  
-- which have one or more external jacks (connectors).

rpJackTable OBJECT-TYPE

SYNTAX SEQUENCE OF RpJackEntry  
MAX-ACCESS not-accessible  
STATUS current  
DESCRIPTION "Information about the external jacks attached  
to MAUs attached to the ports of a repeater."  
::= { dot3RpMauBasicGroup 2 }

rpJackEntry OBJECT-TYPE

SYNTAX RpJackEntry  
MAX-ACCESS not-accessible  
STATUS current  
DESCRIPTION "An entry in the table, containing information  
about a particular jack."  
INDEX { rpMauGroupIndex,  
rpMauPortIndex,  
rpMauIndex,  
rpJackIndex  
}  
::= { rpJackTable 1 }

RpJackEntry ::=

SEQUENCE {  
rpJackIndex Integer32,  
rpJackType IANAifJackType  
}

rpJackIndex OBJECT-TYPE

SYNTAX Integer32 (1..2147483647)  
MAX-ACCESS not-accessible  
STATUS current  
DESCRIPTION "This variable uniquely identifies the jack  
described by this entry from among other jacks  
attached to the same MAU (rpMauIndex)."  
::= { rpJackEntry 1 }

```

rpJackType OBJECT-TYPE
    SYNTAX      IANAifJackType
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "The jack connector type, as it appears on the
                outside of the system."
    ::= { rpJackEntry 2 }

--
-- The Basic Interface MAU Table
--
ifMauTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF IfMauEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "Table of descriptive and status information
                about MAU(s) attached to an interface."
    ::= { dot3IfMauBasicGroup 1 }

ifMauEntry OBJECT-TYPE
    SYNTAX      IfMauEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "An entry in the table, containing information
                about a single MAU."
    INDEX       { ifMauIfIndex,
                ifMauIndex
                }
    ::= { ifMauTable 1 }

IfMauEntry ::=
    SEQUENCE {
        ifMauIfIndex          InterfaceIndex,
        ifMauIndex            Integer32,
        ifMauType              AutonomousType,
        ifMauStatus            INTEGER,
        ifMauMediaAvailable   IANAifMauMediaAvailable,
        ifMauMediaAvailableStateExits Counter32,
        ifMauJabberState       INTEGER,
        ifMauJabberingStateEnters Counter32,
        ifMauFalseCarriers     Counter32,
        ifMauDefaultType       AutonomousType,
        ifMauAutoNegSupported   TruthValue,
        ifMauTypeListBits      IANAifMauTypeListBits,
        ifMauHCFALSECarriers   Counter64,
        ifMauPCSCodingViolations Counter64,
        ifMauFECAbility         INTEGER,
        ifMauFECMode           INTEGER,
        ifMauFECCorrectedBlocks Counter64,
        ifMauFECUnCorrectableBlocks Counter64,
        ifMauSNROpMarginChnlA   Integer32,
        ifMauSNROpMarginChnlB   Integer32,
        ifMauSNROpMarginChnlC   Integer32,
        ifMauSNROpMarginChnlD   Integer32
    }

ifMauIfIndex OBJECT-TYPE
    SYNTAX      InterfaceIndex

```

```

MAX-ACCESS not-accessible
STATUS current
DESCRIPTION "This variable uniquely identifies the interface
to which the MAU described by this entry is
connected."
REFERENCE "RFC 2863, ifIndex"
 ::= { ifMauEntry 1 }

```

```

ifMauIndex OBJECT-TYPE
SYNTAX Integer32 (1..2147483647)
MAX-ACCESS not-accessible
STATUS current
DESCRIPTION "This variable uniquely identifies the MAU
described by this entry from among other MAUs
connected to the same interface (ifMauIfIndex)."
```

```

REFERENCE "IEEE Std 802.3, 30.5.1.1.1, aMAUID."
 ::= { ifMauEntry 2 }

```

```

ifMauType OBJECT-TYPE
SYNTAX AutonomousType
MAX-ACCESS read-only
STATUS current
DESCRIPTION "This object identifies the MAU type. Values for
standard IEEE 802.3 MAU types are defined in the
IANA maintained IANA-MAU-MIB module, as
OBJECT-IDENTITIES of dot3MauType.
If the MAU type is unknown, the object identifier
zeroDotZero is returned."

This object represents the operational type of
the MAU, as determined by either 1) the result
of the Auto-Negotiation function or 2) if
Auto-Negotiation is not enabled or is not
implemented for this MAU, by the value of the
object ifMauDefaultType. In case 2), a set to
the object ifMauDefaultType will force the MAU
into the new operating mode."

REFERENCE "IEEE Std 802.3, 30.5.1.1.2, aMAUType."
 ::= { ifMauEntry 3 }

```

```

ifMauStatus OBJECT-TYPE
SYNTAX INTEGER {
    other(1),
    unknown(2),
    operational(3),
    standby(4),
    shutdown(5),
    reset(6)
}
MAX-ACCESS read-write
STATUS current
DESCRIPTION "The current state of the MAU. This object may
be implemented as a read-only object by those
agents and MAUs that do not implement software
control of the MAU state. Some agents may not
support setting the value of this object to some
of the enumerated values."

```

The value other(1) is returned if the MAU is in

a state other than one of the states 2 through 6.

The value unknown(2) is returned when the MAU's true state is unknown; for example, when it is being initialized.

A MAU in the operational(3) state is fully functional; it operates, and passes signals to its attached DTE or repeater port in accordance to its specification.

A MAU in standby(4) state forces DI and CI to idle and the media transmitter to idle or fault, if supported. Standby(4) mode only applies to link type MAUs. The state of ifMauMediaAvailable is unaffected.

A MAU in shutdown(5) state assumes the same condition on DI, CI, and the media transmitter, as though it were powered down or not connected. The MAU may return other(1) value for the ifMauJabberState and ifMauMediaAvailable objects when it is in this state. For an AUI, this state will remove power from the AUI.

Setting this variable to the value reset(6) resets the MAU in the same manner as a power-off, power-on cycle of at least one-half second would. The agent is not required to return the value reset(6).

Setting this variable to the value operational(3), standby(4), or shutdown(5) causes the MAU to assume the respective state, except that setting a mixing-type MAU or an AUI to standby(4) will cause the MAU to enter the shutdown state."

REFERENCE "IEEE Std 802.3, 30.5.1.1.7, aMAUAdminState, 30.5.1.2.2, acMAUAdminControl, and 30.5.1.2.1, acResetMAU."

::= { ifMauEntry 4 }

ifMauMediaAvailable OBJECT-TYPE

SYNTAX IANAifMauMediaAvailable

MAX-ACCESS read-only

STATUS current

DESCRIPTION "This object identifies Media Available state of the MAU, complementary to the ifMauStatus. Values for the standard IEEE 802.3 Media Available states are defined in the IANA maintained IANA-MAU-MIB module, as IANAifMauMediaAvailable TC."

REFERENCE "IEEE Std 802.3, 30.5.1.1.4, aMediaAvailable."

::= { ifMauEntry 5 }

ifMauMediaAvailableStateExits OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of the number of times that ifMauMediaAvailable for this MAU instance leaves the state available(3).

Discontinuities in the value of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.5.1.1.5, aLoseMediaCounter. RFC 2863, ifCounterDiscontinuityTime."

::= { ifMauEntry 6 }

ifMauJabberState OBJECT-TYPE

SYNTAX INTEGER {  
     other(1),  
     unknown(2),  
     noJabber(3),  
     jabbering(4)  
 }

MAX-ACCESS read-only

STATUS current

DESCRIPTION "The value other(1) is returned if the jabber state is not 2, 3, or 4. The agent shall always return other(1) for MAU type dot3MauTypeAUI.

The value unknown(2) is returned when the MAU's true state is unknown; for example, when it is being initialized.

If the MAU is not jabbering the agent returns noJabber(3). This is the 'normal' state.

If the MAU is in jabber state the agent returns the jabbering(4) value."

REFERENCE "IEEE Std 802.3, 30.5.1.1.6, aJabber.jabberFlag."

::= { ifMauEntry 7 }

ifMauJabberingStateEnters OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of the number of times that mauJabberState for this MAU instance enters the state jabbering(4). This counter will always indicate zero for MAUs of type dot3MauTypeAUI and those of speeds above 10 Mb/s.

Discontinuities in the value of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.5.1.1.6, aJabber.jabberCounter. RFC 2863, ifCounterDiscontinuityTime."

::= { ifMauEntry 8 }

ifMauFalseCarriers OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A count of the number of false carrier events during IDLE in 100BASE-X and 1000BASE-X links.

For all other MAU types, this counter will always indicate zero. This counter does not increment at the symbol rate.

It can increment after a valid carrier completion at a maximum rate of once per 100 ms for 100BASE-X and once per 10us for 1000BASE-X until the next CarrierEvent.

This counter can roll over very quickly. A management station is advised to poll the ifMauHCFalseCarriers instead of this counter in order to avoid loss of information.

Discontinuities in the value of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.5.1.1.10, aFalseCarriers. RFC 2863, ifCounterDiscontinuityTime."

::= { ifMauEntry 9 }

ifMauDefaultType OBJECT-TYPE

SYNTAX AutonomousType

MAX-ACCESS read-write

STATUS current

DESCRIPTION "This object identifies the default administrative baseband MAU type to be used in conjunction with the operational MAU type denoted by ifMauType.

The set of possible values for this object is the same as the set defined for the ifMauType object.

This object represents the administratively-configured type of the MAU. If Auto-Negotiation is not enabled or is not implemented for this MAU, the value of this object determines the operational type of the MAU. In this case, a set to this object will force the MAU into the specified operating mode.

If Auto-Negotiation is implemented and enabled for this MAU, the operational type of the MAU is determined by Auto-Negotiation, and the value of this object denotes the type to which the MAU will automatically revert if/when Auto-Negotiation is later disabled.

It may be necessary to provide for underlying hardware implementations which do not follow the exact behavior specified above.

In particular, when ifMauAutoNegAdminStatus transitions from enabled to disabled, the agent implementation shall ensure that the operational type of the MAU

(as reported by ifMauType) correctly transitions to the value specified by this object, rather than continuing to operate at the value earlier determined by the Auto-Negotiation function."

REFERENCE "IEEE Std 802.3, 30.5.1.1.1, aMAUID, and 22.2.4.1.4."  
 ::= { ifMauEntry 10 }

ifMauAutoNegSupported OBJECT-TYPE

SYNTAX TruthValue  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION "This object indicates whether or not Auto-Negotiation is supported on this MAU."  
 ::= { ifMauEntry 11 }

ifMauTypeListBits OBJECT-TYPE

SYNTAX IANAifMauTypeListBits  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION "A value that uniquely identifies the set of possible IEEE 802.3 types that the MAU could be. If Auto-Negotiation is present on this MAU, this object will map to ifMauAutoNegCapabilityBits.

Note that this MAU may be capable of operating as a MAU type that is beyond the scope of this MIB. This is indicated by returning the bit value bOther in addition to any bit values for standard capabilities that are listed in the IANAifMauTypeListBits TC."

::= { ifMauEntry 12 }

ifMauHCFalseCarriers OBJECT-TYPE

SYNTAX Counter64  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION "A count of the number of false carrier events during IDLE in 100BASE-X and 1000BASE-X links.

For all other MAU types, this counter will always indicate zero. This counter does not increment at the symbol rate.

This counter is a 64-bit version of ifMauFalseCarriers. Since the 32-bit version of this counter can roll over very quickly, management stations are advised to poll the 64-bit version instead, in order to avoid loss of information.

Discontinuities in the value of this counter can occur at re-initialization of the management system and at other times, as indicated by the value of ifCounterDiscontinuityTime."

REFERENCE "IEEE Std 802.3, 30.5.1.1.10, aFalseCarriers. RFC 2863, ifCounterDiscontinuityTime."  
 ::= { ifMauEntry 13 }

ifMauPCSCodingViolations OBJECT-TYPE

SYNTAX Counter64  
 MAX-ACCESS read-only  
 STATUS current  
 DESCRIPTION "Generalized nonresettable counter. This counter has a maximum increment rate of 25 000 000 counts per second for 100 Mb/s implementations and 125 000 000 counts per second for 1000 Mb/s implementations.

For 100 Mb/s operation it is a count of the number of events that cause the PHY to indicate 'Data reception with errors' on the MII (see IEEE Std 802.3 Table 22-2).

For 1000 Mb/s operation it is a count of the number of events that cause the PHY to indicate 'Data reception error' or 'Carrier Extend Error' on the GMII (see IEEE Std 802.3 Table 35-2). The contents of this attribute is undefined when FEC is operating."

REFERENCE "IEEE Std 802.3, 30.5.1.1.12 aPCSCodingViolations."  
 ::= {ifMauEntry 14}

ifMauFECAbility OBJECT-TYPE

SYNTAX INTEGER {  
     unknown(1),  
     supported(2),  
     notsupported(3)  
 }

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A read-only value that indicates if the PHY supports an optional FEC sublayer for forward error correction (see IEEE Std 802.3 65.2 and Clause 74).

If an IEEE Std 802.3 Clause 45 MDIO Interface to the PCS is present, then this attribute will map to the FEC capability register (see 45.2.8.2)."

REFERENCE "IEEE Std 802.3. 30.5.1.1.13 aFECAbility."  
 ::= {ifMauEntry 15}

ifMauFECMode OBJECT-TYPE

SYNTAX INTEGER {  
     unknown(1),  
     disabled(2),  
     enabled(3)  
 }

MAX-ACCESS read-write

STATUS current

DESCRIPTION "A read-write value that indicates the mode of operation of the optional FEC sublayer for forward error correction (see 65.2 and Clause 74).

A GET operation returns the current mode of operation of the PHY. A SET operation changes the mode of operation of the PHY to the indicated value. When IEEE Std 802.3 Clause 73 Auto-Negotiation is enabled a SET operation is not allowed and a GET operation maps to the variable FEC enabled in Clause 74.

If an IEEE Std 802.3 Clause 45 MDIO Interface to the PCS is present, then this object will map to the FEC control register (see 45.2.7.3) for 1000BASE-PX or FEC enable bit in 10GBASE-R FEC control register (see 45.2.1.85)."

REFERENCE "IEEE Std 802.3. 30.5.1.1.14 aFECMode."

::= {ifMauEntry 16}

ifMauFECCorrectedBlocks OBJECT-TYPE

SYNTAX Counter64

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Generalized nonresettable counter. This counter has a maximum increment rate of 1 200 000 counts per second for 1000 Mb/s implementations, and 5 000 000 counts per second for 10 Gb/s implementations.

For 1000BASE-PX PHYs or 10GBASE-R PHYs, a count of corrected FEC blocks. This counter will not increment for other PHY types.

Increment the counter by one for each received block that is corrected by the FEC function in the PHY.

If a Clause 45 MDIO Interface to the PCS is present, then this object will map to the FEC corrected blocks counter (see IEEE Std 802.3 45.2.7.5 and 45.2.1.86)"

REFERENCE "IEEE Std 802.3. 30.5.1.1.15 aFECCorrectedBlocks."

::= {ifMauEntry 17}

ifMauFECUnCorrectableBlocks OBJECT-TYPE

SYNTAX Counter64

MAX-ACCESS read-only

STATUS current

DESCRIPTION "Generalized nonresettable counter. This counter has a maximum increment rate of 1 200 000 counts per second for 1000 Mb/s implementations, and 5 000 000 counts per second for 10 Gb/s implementations.

For 1000BASE-PX PHYs or 10GBASE-R PHYs, a count of uncorrectable FEC blocks. This counter will not increment for other PHY types.

Increment the counter by one for each received block that is determined to be uncorrectable by the FEC function in the PHY.

If a Clause 45 MDIO Interface to the PCS is present, then this object will map to the FEC uncorrectable blocks counter (see IEEE Std 802.3 45.2.7.6 and 45.2.1.87)"

REFERENCE "IEEE Std 802.3. 30.5.1.1.16 aFECUnCorrectableBlocks."

::= {ifMauEntry 18}

ifMauSNROpMarginChnlA OBJECT-TYPE

SYNTAX Integer32 (-127..127)

MAX-ACCESS read-only

STATUS current

DESCRIPTION "The current SNR operating margin measured at the

```

        slicer input for channel A for the 10GBASE-T PMA.
        It is reported in units of 0.1 dB to an accuracy of
        0.5 dB within the range of -12.7 dB to 12.7 dB.
        If an IEEE Std 802.3 Clause 45 MDIO Interface to the
        PMA/PMD is present, then this attribute maps to the SNR
        operating margin channel A register (see 45.2.1.63)."
```

REFERENCE "IEEE Std 802.3. 30.5.1.1.17 aSNROpMarginChnlA."  
::= {ifMauEntry 19}

```

ifMauSNROpMarginChnlB OBJECT-TYPE
    SYNTAX      Integer32 (-127..127)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "The current SNR operating margin measured at the
                slicer input for channel B for the 10GBASE-T PMA.
                It is reported in units of 0.1 dB to an accuracy of
                0.5 dB within the range of -12.7 dB to 12.7 dB.
                If an IEEE Std 802.3 Clause 45 MDIO Interface to the
                PMA/PMD is present, then this attribute maps to the SNR
                operating margin channel B register (see 45.2.1.64)."
```

REFERENCE "IEEE Std 802.3. 30.5.1.1.18 aSNROpMarginChnlB."  
::= {ifMauEntry 20}

```

ifMauSNROpMarginChnlC OBJECT-TYPE
    SYNTAX      Integer32 (-127..127)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "The current SNR operating margin measured at the
                slicer input for channel C for the 10GBASE-T PMA.
                It is reported in units of 0.1 dB to an accuracy of
                0.5 dB within the range of -12.7 dB to 12.7 dB.
                If an IEEE Std 802.3 Clause 45 MDIO Interface to the
                PMA/PMD is present, then this attribute maps to the SNR
                operating margin channel C register (see 45.2.1.65)."
```

REFERENCE "IEEE Std 802.3. 30.5.1.1.19 aSNROpMarginChnlC."  
::= {ifMauEntry 21}

```

ifMauSNROpMarginChnlD OBJECT-TYPE
    SYNTAX      Integer32 (-127..127)
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "The current SNR operating margin measured at the
                slicer input for channel D for the 10GBASE-T PMA.
                It is reported in units of 0.1 dB to an accuracy of
                0.5 dB within the range of -12.7 dB to 12.7 dB.
                If an IEEE Std 802.3 Clause 45 MDIO Interface to the
                PMA/PMD is present, then this attribute maps to the SNR
                operating margin channel D register (see 45.2.1.66)."
```

REFERENCE "IEEE Std 802.3. 30.5.1.1.20 aSNROpMarginChnlD."  
::= {ifMauEntry 22}

```

-- The ifJackTable applies to MAUs attached to interfaces
-- which have one or more external jacks (connectors).

ifJackTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF IfJackEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "Information about the external jacks attached
```

```

        to MAUs attached to an interface."
 ::= { dot3IfMauBasicGroup 2 }

ifJackEntry OBJECT-TYPE
    SYNTAX      IfJackEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "An entry in the table, containing information
                about a particular jack."
    INDEX       { ifMauIfIndex,
                  ifMauIndex,
                  ifJackIndex
                }
 ::= { ifJackTable 1 }

IfJackEntry ::=
    SEQUENCE {
        ifJackIndex      Integer32,
        ifJackType       IANAifJackType
    }

ifJackIndex OBJECT-TYPE
    SYNTAX      Integer32 (1..2147483647)
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "This variable uniquely identifies the jack
                described by this entry from among other jacks
                attached to the same MAU."
 ::= { ifJackEntry 1 }

ifJackType OBJECT-TYPE
    SYNTAX      IANAifJackType
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION "The jack connector type, as it appears on the
                outside of the system."
 ::= { ifJackEntry 2 }
--
-- The MAU Auto-Negotiation Table
--

ifMauAutoNegTable OBJECT-TYPE
    SYNTAX      SEQUENCE OF IfMauAutoNegEntry
    MAX-ACCESS  not-accessible
    STATUS      current
    DESCRIPTION "Configuration and status objects for the
                Auto-Negotiation function of MAUs attached to
                interfaces.

                The ifMauAutoNegTable applies to systems in
                which Auto-Negotiation is supported on one or
                more MAUs attached to interfaces. Note that if
                Auto-Negotiation is present and enabled, the
                ifMauType object reflects the result of the
                Auto-Negotiation function."
 ::= { dot3IfMauAutoNegGroup 1 }

ifMauAutoNegEntry OBJECT-TYPE
    SYNTAX      IfMauAutoNegEntry

```

```

MAX-ACCESS not-accessible
STATUS current
DESCRIPTION "An entry in the table, containing configuration
and status information for the Auto-Negotiation
function of a particular MAU."
INDEX { ifMauIfIndex,
        ifMauIndex
      }
 ::= { ifMauAutoNegTable 1 }

IfMauAutoNegEntry ::=
SEQUENCE {
    ifMauAutoNegAdminStatus INTEGER,
    ifMauAutoNegRemoteSignaling INTEGER,
    ifMauAutoNegConfig INTEGER,
    ifMauAutoNegRestart INTEGER,
    ifMauAutoNegCapabilityBits IANAifMauAutoNegCapBits,
    ifMauAutoNegCapAdvertisedBits IANAifMauAutoNegCapBits,
    ifMauAutoNegCapReceivedBits IANAifMauAutoNegCapBits,
    ifMauAutoNegRemoteFaultAdvertised INTEGER,
    ifMauAutoNegRemoteFaultReceived INTEGER
}
ifMauAutoNegAdminStatus OBJECT-TYPE
SYNTAX INTEGER {
    enabled(1),
    disabled(2)
}
MAX-ACCESS read-write
STATUS current
DESCRIPTION "Setting this object to enabled(1) will cause
the interface that has the Auto-Negotiation
signaling ability to be enabled.

If the value of this object is disabled(2) then
the interface will act as it would if it had no
Auto-Negotiation signaling. Under these
conditions, an IEEE 802.3 MAU will immediately
be forced to the state indicated by the value of
the object ifMauDefaultType.

When ifMauAutoNegAdminStatus transitions from enabled
to disabled, the agent implementation shall
ensure that the operational type of the MAU (as
reported by ifMauType) correctly transitions to
the value specified by the ifMauDefaultType
object, rather than continuing to operate at the
value earlier determined by the Auto-Negotiation
function."
REFERENCE "IEEE Std 802.3, 30.6.1.1.2, aAutoNegAdminState,
and 30.6.1.2.2, acAutoNegAdminControl."
 ::= { ifMauAutoNegEntry 1 }

ifMauAutoNegRemoteSignaling OBJECT-TYPE
SYNTAX INTEGER {
    detected(1),
    notdetected(2)
}
MAX-ACCESS read-only
STATUS current

```

DESCRIPTION "A value indicating whether the remote end of the link is using Auto-Negotiation signaling. It takes the value detected(1) if and only if, during the previous link negotiation, FLP Bursts were received."

REFERENCE "IEEE Std 802.3, 30.6.1.1.3, aAutoNegRemoteSignaling."

::= { ifMauAutoNegEntry 2 }

ifMauAutoNegConfig OBJECT-TYPE

SYNTAX INTEGER {  
     other(1),  
     configuring(2),  
     complete(3),  
     disabled(4),  
     parallelDetectFail(5)  
 }

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A value indicating the current status of the Auto-Negotiation process. The enumeration parallelDetectFail(5) maps to a failure in parallel detection as defined in 28.2.3.1 of IEEE Std 802.3."

REFERENCE "IEEE Std 802.3, 30.6.1.1.4, aAutoNegAutoConfig."

::= { ifMauAutoNegEntry 4 }

ifMauAutoNegRestart OBJECT-TYPE

SYNTAX INTEGER {  
     restart(1),  
     norestart(2)  
 }

MAX-ACCESS read-write

STATUS current

DESCRIPTION "If the value of this object is set to restart(1) then this will force Auto-Negotiation to begin link renegotiation. If Auto-Negotiation signaling is disabled, a write to this object has no effect. Setting the value of this object to norestart(2) has no effect."

REFERENCE "IEEE Std 802.3, 30.6.1.2.1, acAutoNegRestartAutoConfig."

::= { ifMauAutoNegEntry 5 }

ifMauAutoNegCapabilityBits OBJECT-TYPE

SYNTAX IANAifMauAutoNegCapBits

MAX-ACCESS read-only

STATUS current

DESCRIPTION "A value that uniquely identifies the set of capabilities of the local Auto-Negotiation entity. Note that interfaces that support this MIB may have capabilities that extend beyond the scope of this MIB.

Note that the local Auto-Negotiation entity may support some capabilities beyond the scope of this MIB. This is indicated by returning the bit value bOther in addition to any bit values

```

        for standard capabilities that are listed in the
        IANAifMauAutoNegCapBits TC."
REFERENCE   "IEEE Std 802.3, 30.6.1.1.5,
            aAutoNegLocalTechnologyAbility."
 ::= { ifMauAutoNegEntry 6 }

ifMauAutoNegCapAdvertisedBits OBJECT-TYPE
SYNTAX      IANAifMauAutoNegCapBits
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION "A value that uniquely identifies the set of
            capabilities advertised by the local
            Auto-Negotiation entity.

            Capabilities in this object that are not
            available in ifMauAutoNegCapabilityBits cannot
            be enabled.

            Note that the local Auto-Negotiation entity may
            advertise some capabilities beyond the scope of
            this MIB. This is indicated by returning the
            bit value bOther in addition to any bit values
            for standard capabilities that are listed in the
            IANAifMauAutoNegCapBits TC."
REFERENCE   "IEEE Std 802.3, 30.6.1.1.6,
            aAutoNegAdvertisedTechnologyAbility."
 ::= { ifMauAutoNegEntry 7 }

ifMauAutoNegCapReceivedBits OBJECT-TYPE
SYNTAX      IANAifMauAutoNegCapBits
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION "A value that uniquely identifies the set of
            capabilities received from the remote
            Auto-Negotiation entity.

            Note that interfaces that support this MIB may
            be attached to remote Auto-Negotiation entities
            that have capabilities beyond the scope of this
            MIB. This is indicated by returning the bit
            value bOther in addition to any bit values for
            standard capabilities that are listed in the
            IANAifMauAutoNegCapBits TC."
REFERENCE   "IEEE Std 802.3, 30.6.1.1.7,
            aAutoNegReceivedTechnologyAbility."
 ::= { ifMauAutoNegEntry 8 }

ifMauAutoNegRemoteFaultAdvertised OBJECT-TYPE
SYNTAX      INTEGER {
                noError(1),
                offline(2),
                linkFailure(3),
                autoNegError(4)
            }
MAX-ACCESS  read-write
STATUS      current
DESCRIPTION "A value that identifies any local fault
            indications that this MAU has detected and will
            advertise at the next Auto-Negotiation
            interaction for 1000 Mb/s MAUs."

```

```

REFERENCE "IEEE Std 802.3, 30.6.1.1.6,
          aAutoNegAdvertisedTechnologyAbility."
 ::= { ifMauAutoNegEntry 9 }

ifMauAutoNegRemoteFaultReceived OBJECT-TYPE
SYNTAX      INTEGER {
              noError(1),
              offline(2),
              linkFailure(3),
              autoNegError(4)
            }
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION "A value that identifies any fault indications
            received from the far end of a link by the
            local Auto-Negotiation entity for 1000 Mb/s
            MAUs."
REFERENCE   "IEEE Std 802.3, 30.6.1.1.7,
          aAutoNegReceivedTechnologyAbility."
 ::= { ifMauAutoNegEntry 10 }

-- Placeholder to preserve module structure and assignments
dot3Placeholder OBJECT-TYPE
SYNTAX      INTEGER {
              placeholder(1)
            }
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION "A placeholder object to preserve the assignments
            that follow in the module. The assignment was given
            to the object broadMauBasicTable in earlier
            versions of this module. Preserving the assignments that
            follow is considered important because they are used for
            the IANA-MAU-MIB to assign as MAU type values."
REFERENCE   "none"
 ::= { dot3PlaceholderGroup 1 }

-- Notifications for use by 802.3 MAUs

snmpDot3MauTraps OBJECT IDENTIFIER ::= { ieee8023snmpDot3MauMgt 0 }

rpMauJabberTrap NOTIFICATION-TYPE
OBJECTS      { rpMauJabberState }
STATUS      current
DESCRIPTION  "This trap is sent whenever a managed repeater
            MAU enters the jabber state.

            The agent shall limit the generation of
            consecutive rpMauJabberTraps so that there is at
            least a five-second gap between them."
REFERENCE   "IEEE Std 802.3, 30.5.1.3.1, nJabber notification."
 ::= { snmpDot3MauTraps 1 }

ifMauJabberTrap NOTIFICATION-TYPE
OBJECTS      { ifMauJabberState }
STATUS      current
DESCRIPTION  "This trap is sent whenever a managed interface
            MAU enters the jabber state."

```

The agent shall limit the generation of consecutive ifMauJabberTraps so that there is at least a five-second gap between them."

REFERENCE "IEEE Std 802.3, 30.5.1.3.1, nJabber notification."  
 ::= { snmpDot3MauTraps 2 }

-- Conformance statements

```

mauModConf
    OBJECT IDENTIFIER ::= { ieee8023mauMIB 2 }
mauModCompls
    OBJECT IDENTIFIER ::= { mauModConf 1 }
mauModObjGrps
    OBJECT IDENTIFIER ::= { mauModConf 2 }
mauModNotGrps
    OBJECT IDENTIFIER ::= { mauModConf 3 }

-- Object groups
mauRpGrpBasic OBJECT-GROUP
    OBJECTS      { rpMauType,
                  rpMauStatus,
                  rpMauMediaAvailable,
                  rpMauMediaAvailableStateExits,
                  rpMauJabberState,
                  rpMauJabberingStateEnters
                }
    STATUS       current
    DESCRIPTION  "Basic conformance group for MAUs attached to
                  repeater ports. This group is also the
                  conformance specification for RFC 1515
                  implementations."
    ::= { mauModObjGrps 1 }

mauRpGrp100Mbs OBJECT-GROUP
    OBJECTS      { rpMauFalseCarriers }
    STATUS       current
    DESCRIPTION  "Conformance group for MAUs attached to
                  repeater ports with 100 Mb/s or greater
                  capability."
    ::= { mauModObjGrps 2 }

mauRpGrpJack OBJECT-GROUP
    OBJECTS      { rpJackType }
    STATUS       current
    DESCRIPTION  "Conformance group for MAUs attached to
                  repeater ports with managed jacks."
    ::= { mauModObjGrps 3 }

mauIfGrpBasic OBJECT-GROUP
    OBJECTS      { ifMauType,
                  ifMauStatus,
                  ifMauMediaAvailable,
                  ifMauMediaAvailableStateExits,
                  ifMauJabberState,
                  ifMauJabberingStateEnters,
                  dot3Placeholder
                }
    STATUS       current
  
```

```

DESCRIPTION "Basic conformance group for MAUs attached to
            interfaces. This group also provides a
            conformance specification for RFC 1515
            implementations."
 ::= { mauModObjGrps 4 }

mauIfGrpJack OBJECT-GROUP
OBJECTS      { ifJackType }
STATUS       current
DESCRIPTION  "Conformance group for MAUs attached to
            interfaces with managed jacks."
 ::= { mauModObjGrps 5 }

mauIfGrpHighCapacity OBJECT-GROUP
OBJECTS      { ifMauFalseCarriers,
              ifMauTypeListBits,
              ifMauDefaultType,
              ifMauAutoNegSupported
            }
STATUS       current
DESCRIPTION  "Conformance group for MAUs attached to
            interfaces with 100 Mb/s or greater capability."
 ::= { mauModObjGrps 6 }

mauIfGrpAutoNeg2 OBJECT-GROUP
OBJECTS      { ifMauAutoNegAdminStatus,
              ifMauAutoNegRemoteSignaling,
              ifMauAutoNegConfig,
              ifMauAutoNegCapabilityBits,
              ifMauAutoNegCapAdvertisedBits,
              ifMauAutoNegCapReceivedBits,
              ifMauAutoNegRestart
            }
STATUS       current
DESCRIPTION  "Conformance group for MAUs attached to
            interfaces with managed Auto-Negotiation."
 ::= { mauModObjGrps 7 }

mauIfGrpAutoNeg1000Mbps OBJECT-GROUP
OBJECTS      { ifMauAutoNegRemoteFaultAdvertised,
              ifMauAutoNegRemoteFaultReceived
            }
STATUS       current
DESCRIPTION  "Conformance group for 1000 Mb/s MAUs attached to
            interfaces with managed Auto-Negotiation."
 ::= { mauModObjGrps 8 }

mauIfGrpHCStats OBJECT-GROUP
OBJECTS      { ifMauHCFALSECarriers,
              ifMauPCSCodingViolations
            }
STATUS       current
DESCRIPTION  "Conformance for high capacity statistics for
            MAUs attached to interfaces."
 ::= { mauModObjGrps 9 }

mauIfGrpFEC OBJECT-GROUP
OBJECTS      { ifMauFECAbility,
              ifMauFECMode,

```

```

        ifMauFECCorrectedBlocks,
        ifMauFECUnCorrectableBlocks
    }
    STATUS current
    DESCRIPTION "Conformance for FEC capable
        MAUs attached to interfaces."
    ::= { mauModObjGrps 10 }

mauIfGrpsSNR OBJECT-GROUP
    OBJECTS { ifMauSNROpMarginChnlA,
        ifMauSNROpMarginChnlB,
        ifMauSNROpMarginChnlC,
        ifMauSNROpMarginChnlD
    }
    STATUS current
    DESCRIPTION "Conformance for SNR operating margin reporting
        MAUs attached to interfaces."
    ::= { mauModObjGrps 11 }

-- Notification groups

rpMauNotifications NOTIFICATION-GROUP
    NOTIFICATIONS { rpMauJabberTrap }
    STATUS current
    DESCRIPTION "Notifications for repeater MAUs."
    ::= { mauModNotGrps 1 }

ifMauNotifications NOTIFICATION-GROUP
    NOTIFICATIONS { ifMauJabberTrap }
    STATUS current
    DESCRIPTION "Notifications for interface MAUs."
    ::= { mauModNotGrps 2 }

-- Compliance statements

mauModRpCompl2 MODULE-COMPLIANCE
    STATUS current
    DESCRIPTION "Compliance for MAUs attached to repeater
        ports.

        Note that compliance with this compliance
        statement requires compliance with the
        snmpRptrModCompl MODULE-COMPLIANCE statement of
        the IEEE8023-SNMP-REPEATER-MIB defined in Clause 7."

    MODULE -- this module
        MANDATORY-GROUPS { mauRpGrpBasic }

        GROUP mauRpGrp100Mbs
        DESCRIPTION "Implementation of this optional group is
            recommended for MAUs that have 100 Mb/s or
            greater capability."

        GROUP mauRpGrpJack
        DESCRIPTION "Implementation of this optional group is
            recommended for MAUs that have one or more
            external jacks."

        GROUP rpMauNotifications

```

```

DESCRIPTION "Implementation of this group is recommended
            for MAUs attached to repeater ports."

OBJECT      rpMauStatus
MIN-ACCESS  read-only
DESCRIPTION "Write access is not required."
 ::= { mauModCompls 1 }

mauModIfCompl3 MODULE-COMPLIANCE
STATUS      current
DESCRIPTION "Compliance for MAUs attached to interfaces.

            Note that compliance with this compliance
            statement requires compliance with the
            ifCompliance3 MODULE-COMPLIANCE statement of the
            IF-MIB (RFC 2863) and the dot3Compliance2
            MODULE-COMPLIANCE statement of the
            IEEE8023-EtherLike-MIB defined in Clause 10."

MODULE -- this module
MANDATORY-GROUPS { mauIfGrpBasic }

GROUP      mauIfGrpHighCapacity
DESCRIPTION "Implementation of this optional group is
            recommended for MAUs that have 100 Mb/s
            or greater capability."

GROUP      mauIfGrpHCStats
DESCRIPTION "Implementation of this group is mandatory
            for MAUs that have 1000 Mb/s capacity, and
            is recommended for MAUs that have 100 Mb/s
            capacity."

GROUP      mauIfGrpJack
DESCRIPTION "Implementation of this optional group is
            recommended for MAUs that have one or more
            external jacks."

GROUP      mauIfGrpAutoNeg2
DESCRIPTION "Implementation of this group is mandatory
            for MAUs that support managed
            Auto-Negotiation."

GROUP      mauIfGrpAutoNeg100Mbps
DESCRIPTION "Implementation of this group is mandatory
            for MAUs that have 1000 Mb/s or greater
            capability and support managed
            Auto-Negotiation."

GROUP      ifMauNotifications
DESCRIPTION "Implementation of this group is recommended
            for MAUs attached to interfaces."

OBJECT      ifMauStatus
MIN-ACCESS  read-only
DESCRIPTION "Write access is not required."

GROUP      mauIfGrpFEC
DESCRIPTION "Implementation of this optional group is
            recommended for MAUs that incorporate FEC."

```

```
GROUP          mauIfGrpSNR
DESCRIPTION    "Implementation of this optional group is
               recommended for MAUs that report SNR operating
               margin."
```

```
::= { mauModCompls 2 }
```

```
END
```



## Annex A

(informative)

### Bibliography

Bibliographical references are resources that provide additional or helpful material but do not need to be understood or used to implement this standard. Reference to these resources is made for informational use only.

[B1] Case, J., and C. Partridge, “Case Diagrams: A First Step to Diagrammed Management Information Bases,” *Computer Communications Review*, 19(1):13–16, January 1989.

[B2] Faulk, Jr., R. L., C. A. Black, and A. S. Fraley. 1991. Detection on a network by a mapping application of a relative location of a first device to a second device. US Patent 5,293,635, filed Apr. 30, 1991 and issued Mar. 8, 1994.

[B3] Faulk, Jr. R. L., and C. A. Black. 1993. Detection of a relative location of a network device using a multicast packet processed only by hubs. US Patent 5,421,024, filed Aug. 30, 1993 and issued May 30, 1995.

[B4] IEEE Std 802.1Q™, IEEE Standards for Local and Metropolitan Area Networks—Virtual Bridged Local Area Networks.

[B5] IEEE Std 802.9™, IEEE Standards for Local and Metropolitan Area Networks: Integrated Services (IS) LAN Interface at the Medium Access Control (MAC) and Physical (PHY) Layers.

[B6] *IEEE Standards Dictionary: Glossary of Terms & Definitions*, January 2008.<sup>21</sup>

[B7] IETF RFC 1157, *Simple Network Management Protocol*, Case, J., Fedor, M., Schoffstall, M., and J. Davin, May 1990.

[B8] IETF RFC 1573, *Evolution of the Interfaces Group of MIB-II*, McCloghrie, K., and F. Kastenholz, January 1994.

[B9] IETF RFC 1212, *Concise MIB Definitions*, Rose, M. and K. McCloghrie, March 1991.

[B10] IETF RFC 1284, *Definitions of Managed Objects for Ethernet-Like Interface Types*, Cook, J., December 1991.

[B11] IETF RFC 1369, *Implementation Notes and Experience for The Internet Ethernet MIB*, Kastenholz, F., October 1992.

[B12] IETF RFC 1398, *Definitions of Managed Objects for the Ethernet-like Interface Types*, Kastenholz, F., January 1993.

[B13] IETF RFC 1515, *Definitions of Managed Objects for IEEE 802.3 Medium Attachment Units (MAUs)*, McMaster, D., McCloghrie, K., and S. Roberts, September 1993.

<sup>21</sup>The IEEE Standards Dictionary: Glossary of Terms & Definitions is available at <http://shop.ieee.org/>.

- [B14] IETF RFC 1525, *Definitions of Managed Objects for Source Routing Bridges*, Decker, E., McCloghrie, K., Langille, P., and A. Rijsinghani, September 1993.
- [B15] IETF RFC 1643, *Definitions of Managed Objects for the Ethernet-like Interface Types*, Kastenholz, F., July 1994.
- [B16] IETF RFC 1650, *Definitions of Managed Objects for the Ethernet-like Interface Types using SMIv2*, Kastenholz, F., August 1994.
- [B17] IETF RFC 1905, *Protocol Operations for version 2 of the Simple Network Management Protocol (SNMPv2)*, Case, J., McCloghrie, K., Rose, M., and S. Waldbusser, January 1996.
- [B18] IETF RFC 2026, *The Internet Standards Process - Revision 3*, Bradner, S., October 1996.
- [B19] IETF RFC 2108, *Definitions of Managed Objects for IEEE 802.3 Repeater Devices using SMIv2*, de Graaf, K., Romascanu, D., McMaster, D., and K. McCloghrie, February 1997.
- [B20] IETF RFC 2239, *Definitions of Managed Objects for IEEE 802.3 Medium Attachment Units (MAUs) using SMIv2*, de Graaf, K., Romascanu, D., McMaster, D., McCloghrie, K., and S. Roberts, November 1997.
- [B21] IETF RFC 2358, *Definitions of Managed Objects for the Ethernet-like Interface Types*, Flick, J. and J. Johnson, June 1998.
- [B22] IETF RFC 2665, *Definitions of Managed Objects for the Ethernet-like Interface Types*, Flick, J. and J. Johnson, August 1999.
- [B23] IETF RFC 2666, *Definitions of Object Identifiers for Identifying Ethernet Chip Sets*, Flick, J., August 1999.
- [B24] IETF RFC 2668, *Definitions of Managed Objects for IEEE 802.3 Medium Attachment Units (MAUs)*, Smith, A., Flick, J., de Graaf, K., Romascanu, D., McMaster, D., McCloghrie, K., and S. Roberts, August 1999.
- [B25] IETF RFC 3418, *Management Information Base (MIB) for the Simple Network Management Protocol (SNMP)*, Presuhn, R., December 2002.
- [B26] IETF RFC 3636, *Definitions of Managed Objects for IEEE 802.3 Medium Attachment Units (MAUs)*, Flick, J., September 2003.
- [B27] IETF RFC 3637, *Definitions of Managed Objects for the Ethernet WAN Interface Sublayer*, Heard, C., September 2003.
- [B28] IETF RFC 4070, *Definitions of Managed Object Extensions for Very High Speed Digital Subscriber Lines (VDSL) Using Multiple Carrier Modulation (MCM) Line Coding*, Dodge, M. and B. Ray, May 2005.
- [B29] IETF RFC 4181, *Guidelines for Authors and Reviewers of MIB Documents*, Heard, C., September 2005.
- [B30] IETF RFC 4188, *Definitions of Managed Objects for Bridges*, Norseth, K. and E. Bell, September 2005.
- [B31] IETF RFC 4319, *Definitions of Managed Objects for High Bit-Rate DSL—2nd generation (HDSL2) and Single-Pair High-Speed Digital Subscriber Line (SHDSL) Lines*, Sikes, C., Ray, B., and R. Abbi, December 2005.

[B32] IETF RFC 4837, *Managed Objects of Ethernet Passive Optical Networks (EPON)*, Khhermosh, L., July 2007.

[B33] IETF RFC 4878, *Definitions and Managed Objects for Operations, Administration, and Maintenance (OAM) Functions on Ethernet-Like Interfaces*, Squire, M., June 2007.

[B34] IETF, "Ethernet Interfaces and Hub MIB (hubmib) Charter," <<http://www.ietf.org/html.charters/OLD/hubmib-charter.html>>.

[B35] Internet Assigned Numbers Authority (IANA), "IANAifType Textual Convention definition," <<http://www.iana.org/assignments/ianaiftype-mib>>.

[B36] ISO/IEC 8824:1990, Information technology -- Abstract Syntax Notation One (ASN.1).

[B37] ISO/IEC 10165-4:1992, Information technology—Open Systems Interconnection—Structure of management information—Part 4: Guidelines for the definition of managed objects.

[B38] ISO/IEC 10165-5:1994, Information technology—Open Systems Interconnection—Structure of management information: Generic management information.

[B39] Kastenholz, F., "IEEE 802.3 Layer Management Draft compatible MIB for TCP/IP Networks," electronic mail message to mib-wg@nnsf.net, 9 June 1989.

[B40] Network Interoperability Consultative Committee (NICC), "Specification of the Access Network Frequency Plan (ANFP) applicable to transmission systems used on the BT Access Network," NICC Document ND1602:2005/08, August 2005.



## Annex B

(normative)

### GDMO specification for IEEE 802.3 managed object classes

This annex formally defines the protocol encodings for CMIP and ISO/IEC 15802-2:1995 [IEEE Std 802.1B and IEEE Std 802.1k, 1995 Edition] for the IEEE 802.3 managed objects using the templates specified in ISO/IEC 10165-4:1992. The application of a GDMO template compiler against B.1 to B.18 will produce the proper protocol encodings.

NOTE 1—The arcs (that is, object identifier values) defined in this annex deprecate the arcs previously defined in Annexes H.1 (Layer Management), H.2 (Repeater Management), and H.3 (MAU Management). See IEEE Std 802.1F-1993, Annex C.4.

NOTE 2—During the update for IEEE Std 802.3-2005, differences between objects in the root of all registration arcs were harmonized and aligned with the recommendation of IEEE Std 802b-2004. All instances were changed to *{iso(1) std(0) iso8802(8802) csma(3)}*... For maximum compatibility with previous implementations it is recommended that all implementations respond equally to requests for communication based on registration arc *{iso(1) member-body(2) us(840) ieee802dot3(10006)}*...

NOTE 3—The arcs defined in this annex have not been updated to conform to the currently preferred root of “org ieee(111) standards-association-numbers-series-standards(2) lan-man-stds(802) ieee802dot3(3)” because the GDMO object definitions are of historical value only, and are not recommended for current or future implementations.

Each attribute definition in this clause references directly by means of the WITH ATTRIBUTE SYNTAX construct or indirectly by means of the DERIVED FROM construct an ASN.1 type or subtype that defines the attribute’s type and range. Those ASN.1 types and subtypes defined exclusively for CSMA/CD Management appear in a single ASN.1 module in C.2.

Counters for these protocol encodings are specified as either 32 or 64 bits wide. Thirty-two bit counters are used for the protocol encoding of counter attributes, providing the minimum rollover time is 58 min or more. Sixty-four bit counters are used for the protocol encoding of counter attributes that could roll over in less than 58 min with a 32-bit counter. Approximate counter rollover times are provided as notes below each counter BEHAVIOUR definition. 10 Gb/s counters are 10 times faster than 1000 Mb/s counters, 1000 Mb/s counters are 10 times faster than 100 Mb/s counters, and 100 Mb/s counters are 10 times faster than 10 Mb/s counters. For a formal definition of the counter, refer to the BEHAVIOUR bCMCounter in C.2.

### B.1 DTE MAC entity managed object class

#### B.1.1 DTE MAC entity formal definition

```
oMACEntity                                MANAGED OBJECT CLASS

    DERIVED FROM                          'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2:1992':top;
    CHARACTERIZED BY
        pBasic                             PACKAGE
        ATTRIBUTES aMACID                  GET;
        ACTIONS   acInitializeMAC;

    ;

    ;
    CONDITIONAL PACKAGES
```

	pMandatory	PACKAGE	
	ATTRIBUTES	aFramesTransmittedOK aSingleCollisionFrames aMultipleCollisionFrames aFramesReceivedOK aFrameCheckSequenceErrors aAlignmentErrors aMACCapabilities aDuplexStatus aRateControlAbility aRateControlStatus aDeferControlAbility aDeferControlStatus	GET, GET, GET, GET, GET, GET, GET, GET-REPLACE, GET, GET-REPLACE, GET, GET-REPLACE;
REGISTERED AS		{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) macMandatoryPkg(1)};	
PRESENT IF		Conformance to DTE Management is desired. Attributes aMACCapabilities and aDuplexStatus are mandatory in systems that can operate in full duplex mode and are recommended in systems that can only operate in half duplex mode.,	
	pRecommended	PACKAGE	
	ATTRIBUTES	aOctetsTransmittedOK aFramesWithDeferredXmissions aLateCollisions aFramesAbortedDueToXSColls aFramesLostDueToIntMACXmitError aCarrierSenseErrors aOctetsReceivedOK aFramesLostDueToIntMACRcvError aPromiscuousStatus aReadMulticastAddressList	GET, GET, GET, GET, GET, GET, GET, GET-REPLACE, GET;
	ACTIONS	acAddGroupAddress, acDeleteGroupAddress;	
REGISTERED AS		{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) macRecommendedPkg(2)};	
PRESENT IF		The Recommended Package is implemented.,	
	pOptional	PACKAGE	
	ATTRIBUTES	aMulticastFramesXmittedOK aBroadcastFramesXmittedOK aMulticastFramesReceivedOK aBroadcastFramesReceivedOK aInRangeLengthErrors aOutOfRangeLengthField aFrameTooLongErrors aMaxFrameLength aMACEnableStatus aTransmitEnableStatus aMulticastReceiveStatus aReadWriteMACAddress	GET, GET, GET, GET, GET, GET, GET, GET, GET-REPLACE, GET-REPLACE, GET-REPLACE, GET-REPLACE;
	ACTIONS	acExecuteSelfTest;	
REGISTERED AS		{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) optionalPkg(3)};	
PRESENT IF		The Optional Package and the Recommended Package are implemented.,	
	pArray	PACKAGE	
	ATTRIBUTES	aCollisionFrames	GET;
REGISTERED AS		{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) arrayPkg(4)};	

PRESENT IF           The Array Package and the Recommended Package are implemented.,  
                   pExcessiveDeferral           PACKAGE  
                   ATTRIBUTES   aFramesWithExcessiveDeferral           GET;  
 REGISTERED AS    {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) excessive-  
                   DeferralPkg(5)};  
 PRESENT IF           The ExcessiveDeferral Package and the Recommended Package are  
                   implemented.;  
 REGISTERED AS    {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) managedObjectClass(3)  
                   macObjectClass(1)};

**nbMACName****NAME BINDING**

SUBORDINATE OBJECT CLASS    oMACEntity;  
 NAMED BY SUPERIOR OBJECT CLASS  
                   "ISO/IEC 10165-2":system;  
 WITH ATTRIBUTE               aMACID;  
 REGISTERED AS                {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
                   macName(1)};

**nbMACMonitor****NAME BINDING**

SUBORDINATE OBJECT CLASS    "IEEE802.1F":oEWMAMetricMonitor;  
 NAMED BY SUPERIOR OBJECT CLASS  
                   "ISO/IEC 10165-2":system;  
 WITH ATTRIBUTE               "IEEE802.1F":aScannerId;  
                   CREATE               WITH-AUTOMATIC-INSTANCE-NAMING;  
                   DELETE               ONLY-IF-NO-CONTAINED-OBJECTS;  
 REGISTERED AS                {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
                   macMonitor(2)};

**nbMAC-MACControl****NAME BINDING**

SUBORDINATE OBJECT CLASS    oMACEntity;  
 NAMED BY SUPERIOR OBJECT CLASS   oMACControlEntity;  
 WITH ATTRIBUTE               aMACID;  
 REGISTERED AS                {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) nbMAC-  
                   MACControl(16)};

**nbMAC-Aggregator****NAME BINDING**

SUBORDINATE OBJECT CLASS    oMACEntity;  
 NAMED BY SUPERIOR OBJECT CLASS   oAggregator;  
 WITH ATTRIBUTE               aMACID;  
 REGISTERED AS                {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) nbMAC-  
                   Aggregator(17)};

**aDeferControlAbility****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX       IEEE802Dot3-MgmtAttributeModule.TrueFalse;  
 MATCHES FOR                EQUALITY, ORDERING;  
 BEHAVIOUR                   bDeferControlAbility;  
 REGISTERED AS                {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) deferContro-  
                   lAbility(311)};



**bSingleCollisionFrames****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.3

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 103 h.;

**aMultipleCollisionFrames****ATTRIBUTE**DERIVED FROM  
BEHAVIOUR  
REGISTERED ASaCMCounter;  
bMultipleCollisionFrames;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
multipleCollisionFrames(4)};**bMultipleCollisionFrames****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.4

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 125 h.;

**aFramesReceivedOK****ATTRIBUTE**DERIVED FROM  
BEHAVIOUR  
REGISTERED ASaCMCounter;  
bFramesReceivedOK;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
framesReceivedOK(5)};**bFramesReceivedOK****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.5

NOTE 1—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.

NOTE 2—This maps to framesReceived (of the mandatory macPackage) in ISO/IEC 10742:1994.;

**aFrameCheckSequenceErrors****ATTRIBUTE**DERIVED FROM  
BEHAVIOUR  
REGISTERED ASaCMCounter;  
bFrameCheckSequenceErrors;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
frameCheckSequenceErrors(6)};**bFrameCheckSequenceErrors****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.6

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

**aAlignmentErrors****ATTRIBUTE**

DERIVED FROM

aCMCounter;

BEHAVIOUR REGISTERED AS	bAlignmentErrors; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) alignmentErrors(7)};
<b>bAlignmentErrors</b>  DEFINED AS	<b>BEHAVIOUR</b>  See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.7  NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;
<b>aOctetsTransmittedOK</b>  DERIVED FROM BEHAVIOUR REGISTERED AS	<b>ATTRIBUTE</b>  aCMCounter; bOctetsTransmittedOK; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) octetsTransmittedOK(8)};
<b>bOctetsTransmittedOK</b>  DEFINED AS	<b>BEHAVIOUR</b>  See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.8  NOTE 1—The approximate minimum time between counter rollovers for 10 Mb/s operation is 58 min.  NOTE 2—This maps to octetsSent (of the mandatory macPackage) in ISO/IEC 10742:1994.;
<b>aFramesWithDeferredXmissions</b>  DERIVED FROM BEHAVIOUR REGISTERED AS	<b>ATTRIBUTE</b>  aCMCounter; bFramesWithDeferredXmissions; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) framesWithDeferredXmissions(9)};
<b>bFramesWithDeferredXmissions</b>  DEFINED AS	<b>BEHAVIOUR</b>  See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.9  NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 103 h.;
<b>aLateCollisions</b>  DERIVED FROM BEHAVIOUR REGISTERED AS	<b>ATTRIBUTE</b>  aCMCounter; bLateCollisions; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) lateCollisions(10)};
<b>bLateCollisions</b>  DEFINED AS	<b>BEHAVIOUR</b>  See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.10  NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

**aFramesAbortedDueToXSColls****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bFramesAbortedDueToXSColls;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
framesAbortedDueToXSColls(11)};

**bFramesAbortedDueToXSColls****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.11

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 53 days.;

**aFramesLostDueToIntMACXmitError****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bFramesLostDueToIntMACXmitError;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
framesLostDueToIntMACXmitError(12)};

**bFramesLostDueToIntMACXmitError****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.12

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 16 h.;

**aCarrierSenseErrors****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bCarrierSenseErrors;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
carrierSenseErrors(13)};

**bCarrierSenseErrors****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.13

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

**aOctetsReceivedOK****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bOctetsReceivedOK;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
octetsReceivedOK(14)};

**bOctetsReceivedOK****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.14

NOTE 1—The approximate minimum time between counter rollovers for 10 Mb/s operation is 58 min.

NOTE 2—This maps to octetsReceived (of the mandatory macPackage) in ISO/IEC 10742:1994.;

<b>aFramesLostDueToIntMACRcvError</b>	<b>ATTRIBUTE</b>
DERIVED FROM BEHAVIOUR REGISTERED AS	aCMCounter; bFramesLostDueToIntMACRcvError; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) framesLostDueToIntMACRcvError(15)};
<b>bFramesLostDueToIntMACRcvError</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.15
	NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;
<b>aPromiscuousStatus</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.TrueFalse; bPromiscuousStatus; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) promiscuousStatus(16)};
<b>bPromiscuousStatus</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.16;
<b>aReadMulticastAddressList</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule. MulticastAddressList; bReadMulticastAddressList; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) readMulticastAddressList(17)};
<b>bReadMulticastAddressList</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.17;
<b>aMulticastFramesXmittedOK</b>	<b>ATTRIBUTE</b>
DERIVED FROM BEHAVIOUR REGISTERED AS	aCMCounter; bMulticastFramesXmittedOK; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) multicastFramesXmittedOK(18)};
<b>bMulticastFramesXmittedOK</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.18
	NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

**aBroadcastFramesXmittedOK****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bBroadcastFramesXmittedOK;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
broadcastFramesXmittedOK(19)};

**bBroadcastFramesXmittedOK****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.19

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

**aFramesWithExcessiveDeferral****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bFramesWithExcessiveDeferral;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
framesWithExcessiveDeferral(20)};

**bFramesWithExcessiveDeferral****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.20

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 58 days.;

**aMulticastFramesReceivedOK****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bMulticastFramesReceivedOK;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
multicastFramesReceivedOK(21)};

**bMulticastFramesReceivedOK****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.21

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

**aBroadcastFramesReceivedOK****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bBroadcastFramesReceivedOK;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
broadcastFramesReceivedOK(22)};

**bBroadcastFramesReceivedOK****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.22

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

**aInRangeLengthErrors****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bInRangeLengthErrors;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
inRangeLengthErrors(23)};

**bInRangeLengthErrors****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.23

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

**aOutOfRangeLengthField****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bOutOfRangeLengthField;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
outOutOfRangeLengthField(24)};

**bOutOfRangeLengthField****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.24

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

**aFrameTooLongErrors****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bFrameTooLongErrors;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
frameTooLongErrors(25)};

**bFrameTooLongErrors****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.25

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 61 days.;

**aMACEnableStatus****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX  
BEHAVIOUR  
REGISTERED AS

IEEE802Dot3-MgmtAttributeModule.TrueFalse;  
bMACEnableStatus;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
mACEnableStatus(26)};

**bMACEnableStatus****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.26;

<b>aTransmitEnableStatus</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX BEHAVIOUR	IEEE802Dot3-MgmtAttributeModule.TrueFalse; bTransmitEnableStatus;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) transmitEnableStatus(27)};
<b>bTransmitEnableStatus</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.27;
<b>aMulticastReceiveStatus</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX BEHAVIOUR	IEEE802Dot3-MgmtAttributeModule.TrueFalse; bMulticastReceiveStatus;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) multicastReceiveStatus(28)};
<b>bMulticastReceiveStatus</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.28;
<b>aReadWriteMACAddress</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX BEHAVIOUR	IEEE802CommonDefinitions.MACAddress; bReadWriteMACAddress;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) modifyMACAddress(29)};
<b>bReadWriteMACAddress</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.29
	NOTE—This maps to localMACAddress (of the mandatory macPackage) in ISO/ IEC 10742:1994.;
<b>aCollisionFrames</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX BEHAVIOUR	IEEE802Dot3-MgmtAttributeModule.AttemptArray; bCollisionFrames;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) collisionFrames(30)};
<b>bCollisionFrames</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.30
	NOTE—The approximate minimum time for any single counter rollover for 10 Mb/s operation is 103 h.;
<b>aMACCapabilities</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3- MgmtAttributeModule.MACCapabilitiesList;

MATCHES FOR BEHAVIOUR REGISTERED AS	EQUALITY, ORDERING; bMACCapabilities; {iso(1) std(0) iso8802(8802) csmacdmgt(30) attribute(7) aMACCapabilities(89)};
<b>bMACCapabilities</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.1.1.31;
<b>aMaxFrameLength</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3- MgmtAttributeModule.MaxFrameLengthList;
MATCHES FOR BEHAVIOUR REGISTERED AS	EQUALITY, ORDERING; bMaxFrameLength; {iso(1) std(0) iso8802(8802) csmacdmgt(30) attribute(7) aMaxFrameLength(357)};
<b>bMaxFrameLength</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.37;
<b>aDuplexStatus</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.DuplexValues; EQUALITY; bDuplexStatus; {iso(1) std(0) iso8802(8802) csmacdmgt(30) attribute(7) aDuplexStatus(90)};
<b>bDuplexStatus</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.1.1.32;
<b>aRateControlAbility</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.TrueFalse; bRateControlAbility; {iso(1) std(0) iso8802(8802) csmacdmgt(30) attribute(7) rateControlAbility(179)};
<b>bRateControlAbility</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.1.1.33;
<b>aRateControlStatus</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.RateValues; EQUALITY; bRateControlStatus; {iso(1) std(0) iso8802(8802) csmacdmgt(30) attribute(7) rateControlStatus(180)};

**bRateControlStatus****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.3.1.1.34;

**B.1.3 DTE MAC entity actions****acInitializeMAC****ACTION**

BEHAVIOUR bInitializeMAC;  
 MODE CONFIRMED;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csmactdmgt(30) action(9) initializeMAC(1)};

**bInitializeMAC****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.3.1.2.1;

**acAddGroupAddress****ACTION**

BEHAVIOUR bAddGroupAddress;  
 MODE CONFIRMED;  
 WITH INFORMATION SYNTAX IEEE802CommonDefinitions.MACAddress;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csmactdmgt(30) action(9) addGroupAddress(2)};

**bAddGroupAddress****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.3.1.2.2;

**acDeleteGroupAddress****ACTION**

BEHAVIOUR bDeleteGroupAddress;  
 MODE CONFIRMED;  
 WITH INFORMATION SYNTAX IEEE802CommonDefinitions.MACAddress;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csmactdmgt(30) action(9) deleteGroupAddress(3)};

**bDeleteGroupAddress****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.3.1.2.3;

**acExecuteSelfTest****ACTION**

BEHAVIOUR bExecuteSelfTestMAC;  
 MODE CONFIRMED;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csmactdmgt(30) action(9) executeSelfTestMAC(4)};

**bExecuteSelfTestMAC****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.3.1.2.4;

## B.2 DTE physical entity managed object class

### B.2.1 DTE physical entity formal definition

```

oPHYEntity                                MANAGED OBJECT CLASS

DERIVED FROM                              'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2
                                           :1992':top;

CHARACTERIZED BY
  pBasic
    ATTRIBUTES
      aPHYID                                GET,
      aPHYType                              GET,
      aPHYTypeList                          GET,
      aMIIDetect                             GET,
      aPHYAdminState                        GET;
  ;
;
CONDITIONAL PACKAGES
  pRecommended
    ATTRIBUTES
      aSQETestErrors                        GET;
    REGISTERED AS
      {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)
      package(4)
      phyRecommendedPkg(6)};
    PRESENT IF
      The Recommended Package is implemented.,
  pMultiplePhy
    ACTIONS
      acPHYAdminControl;
    REGISTERED AS
      {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)
      package(4)
      phyMultiplePhyPkg(7)};
    PRESENT IF
      There is more than one PHY per MAC.,
  p100MbpsMonitor
    ATTRIBUTES
      aSymbolErrorDuringCarrier            GET;
    REGISTERED AS
      {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)
      package(4)
      phy100MbpsMonitor(8)};
    PRESENT IF
      The 100/1000 Mb/s Monitor capability is
      implemented.;
REGISTERED AS
  {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)
  managedObjectClass(3) phyObjectClass(2)};

```

#### nbPHYName

#### NAME BINDING

```

SUBORDINATE OBJECT CLASS                oPHYEntity;
NAMED BY SUPERIOR OBJECT CLASS
  oMACEntity;
WITH ATTRIBUTE
  aPHYID;
REGISTERED AS
  {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)
  phyName(3)};

```

#### nbPHYMonitor

#### NAME BINDING

```

SUBORDINATE OBJECT CLASS                "IEEE802.1F":oEWMAMetricMonitor;

```

NAMED BY SUPERIOR OBJECT CLASS  
 WITH ATTRIBUTE "ISO/IEC 10165-2":system;  
 CREATE "IEEE802.1F":aScannerId;  
 DELETE WITH-AUTOMATIC-INSTANCE-NAMING;  
 ONLY-IF-NO-CONTAINED-OBJECTS;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
 phyMonitor(4)};

## B.2.2 DTE physical entity attributes

### aPHYID

### ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bPHYID;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
 phyID(31)};

### bPHYID

### BEHAVIOUR

DEFINED AS See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.3.2.1.1;

### aPHYType

### ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-  
 MgmtAttributeModule.PhyTypeValue;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bPHYType;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
 phyType(32)};

### bPHYType

### BEHAVIOUR

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.3.2.1.2;

### aPHYTypeList

### ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PhyTypeList;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bPHYTypeList;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
 phyTypeList(33)};

### bPHYTypeList

### BEHAVIOUR

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.3.2.1.3;

### aSQETestErrors

### ATTRIBUTE

DERIVED FROM aCMCounter;  
 BEHAVIOUR bSQETestErrors;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)}

sqeTestErrors(34));

**bSQETestErrors****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.2.1.4

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

**aSymbolErrorDuringCarrier****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bSymbolErrorDuringCarrier;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
symbolErrorDuringCarrier(35)};

**bSymbolErrorDuringCarrier****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.2.1.5

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

**aMIIDetect ATTRIBUTE**

WITH ATTRIBUTE SYNTAX  
MATCHES FOR  
BEHAVIOUR

IEEE802Dot3-MgmtAttributeModule.MIIDetect;  
EQUALITY;  
bMIIDetect;

REGISTERED AS

{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
mIIDetect(36)};

**bMIIDetect****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.2.1.6;

**aPHYAdminState****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX

IEEE802Dot3-MgmtAttributeModule.

MATCHES FOR  
BEHAVIOUR

PortAdminState;  
EQUALITY, ORDERING;  
bPHYAdminState;

REGISTERED AS

{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
phyAdminState(37)};

**bPHYAdminState****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.2.1.7;

**B.2.3 DTE physical entity actions****acPHYAdminControl****ACTION**

BEHAVIOUR

bPHYAdminControl;

MODE CONFIRMED;  
 WITH INFORMATION SYNTAX IEEE802Dot3-MgmtAttributeModule.  
 PortAdminState;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) action(9)  
 phyAdminControl(5)};

**bPHYAdminControl****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.3.2.2.1;

**B.3 DTE MAC control entity managed object class****B.3.1 DTE MAC control entity formal definition****oMACControlEntity****MANAGED OBJECT CLASS**

DERIVED FROM 'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2 :1992':top;  
 CHARACTERIZED BY  
   pMandatory PACKAGE  
   ATTRIBUTES aMACControlFunctionsSupported GET-REPLACE;  
 ;  
 ;  
 CONDITIONAL PACKAGES  
   pRecommended PACKAGE  
   ATTRIBUTES aMACControlFramesTransmitted GET,  
               aMACControlFramesReceived GET,  
               aUnsupportedOpcodesReceived GET;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3)  
               csmacdmgt(30)  
               package(4) macControlRecommendedPkg(17)};  
 PRESENT IF The Recommended Package is implemented.;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3)  
               csmacdmgt(30)  
               managedObjectClass(3) macControlObjectClass(8)};

**nbMACControl-System****NAME BINDING**

SUBORDINATE OBJECT CLASS oMACControlEntity;  
 NAMED BY SUPERIOR OBJECT CLASS "ISO/IEC 10165-2":system;  
 WITH ATTRIBUTE aMACControlID;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) nbMAC-  
 Control-System(18)};

**nbMACControl-Aggregator****NAME BINDING**

SUBORDINATE OBJECT CLASS oMACControlEntity;  
 NAMED BY SUPERIOR OBJECT CLASS oAggregator;  
 WITH ATTRIBUTE aMACControlID;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) nbMAC-  
 Control-Aggregator(19)};

**nbMACControlMonitor****NAME BINDING**

SUBORDINATE OBJECT CLASS“IEEE802.1F”:oEWMAMetricMonitor;  
 NAMED BY SUPERIOR OBJECT CLASS  
 “ISO/IEC 10165-2”:system;  
 WITH ATTRIBUTE “IEEE802.1F”:aScannerId;  
 CREATE WITH-AUTOMATIC-INSTANCE-NAMING;  
 DELETE ONLY-IF-NO-CONTAINED-OBJECTS;  
 REGISTERED AS{iso(1) std(0) iso8802(8802) csma(3)  
 csmacdmgt(30) nameBinding(6) macControlMonitor(15)};

### B.3.2 DTE MAC Control entity attributes

<b>aMACControlID</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR	EQUALITY;
BEHAVIOUR	bMACControlID;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) aMACControlID(92)};
<b>bMACControlID</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.3.1;
<b>aMACControlFunctionsSupported</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule. MACControlFunctionsList;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bMACControlFunctionsSupported;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) aMACControlFunctionsSupported(93)};
<b>bMACControlFunctionsSupported</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.3.2;
<b>aMACControlFramesTransmitted</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
BEHAVIOUR	bMACControlFramesTransmitted;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) aMACControlFramesTransmitted(94)};
<b>bMACControlFramesTransmitted</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.3.3;
<b>aMACControlFramesReceived</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
BEHAVIOUR	bMACControlFramesReceived;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) aMACControlFramesReceived(95)};

**bMACControlFramesReceived****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.3.3.4;

**aUnsupportedOpcodesReceived****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 BEHAVIOUR bUnsupportedOpcodesReceived;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3)  
 csmacdmgt(30) attribute(7) aUnsupportedOpcodesReceived(96)};

**bUnsupportedOpcodesReceived****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.3.3.5;

**B.4 DTE MAC Control function entity managed object class****B.4.1 DTE MAC Control function entity formal definition****oMACControlFunctionEntity****MANAGED OBJECT CLASS**

DERIVED FROM 'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2 :1992':top;  
 CHARACTERIZED BY  
 pMandatory PACKAGE  
 ATTRIBUTES aPAUSELinkDelayAllowance GET-REPLACE;  
 ;  
 ;  
 CONDITIONAL PACKAGES  
 pRecommended PACKAGE  
 ATTRIBUTES aPAUSEMACCtrlFramesTransmitted GET,  
 aPAUSEMACCtrlFramesReceived GET;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3)  
 csmacdmgt(30)  
 package(4) macControlFunctionRecomendedPkg(25)};  
 PRESENT IF The Recommended Package is implemented.;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3)  
 csmacdmgt(30)  
 managedObjectClass(3)macControlFunctionObjectClass(9)};

**oMPCP****MANAGED OBJECT CLASS**

DERIVED FROM 'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2:1992':top;  
 CHARACTERIZED BY  
 pMPCPBasic PACKAGE  
 ATTRIBUTES aMPCPID GET,  
 aMPCPAdminState GET,  
 aMPCPMode GET,  
 aMPCPLinkID GET,  
 aMPCPRemoteMACAddress GET,  
 aMPCPRegistrationState GET,  
 aMPCPMACCtrlFramesTransmitted GET,  
 aMPCPMACCtrlFramesReceived GET,

aMPCPTxGate	GET,
aMPCPTxRegAck	GET,
aMPCPTxRegister	GET,
aMPCPTxRegRequest	GET,
aMPCPTxReport	GET,
aMPCPRxGate	GET,
aMPCPRxRegAck	GET,
aMPCPRxRegister	GET,
aMPCPRxRegRequest	GET,
aMPCPRxReport	GET,
aMPCPTransmitElapsed	GET,
aMPCPReceiveElapsed	GET,
aMPCPRoundTripTime	GET,
aMPCPDiscoveryWindowsSent	GET,
aMPCPDiscoveryTimeout	GET,
aMPCPMaximumPendingGrants	GET;
ACTIONS	acMPCPAdminControl;
	;
	;
	REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) managedObjectClass(3) mpcpObjectClass(21)};

**nbMPCP-macControl**                      **NAME BINDING**

SUBORDINATE OBJECT CLASS                      oMPCP;  
 NAMED BY SUPERIOR OBJECT CLASS              oMACControlEntity AND SUBCLASSES;  
 WITH ATTRIBUTE                                      aMPCPID;  
 REGISTERED AS                      {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) mpcp-macControl(34)};

**aMPCPID**                                      **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX                      IEEE802Dot3-MgmtAttributeModule.OneOfName;  
 MATCHES FOR                                      EQUALITY, ORDERING;  
 BEHAVIOUR                                      bMPCPID;  
 REGISTERED AS                      {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpID(351)};

**bMPCPID**                                      **BEHAVIOUR**

DEFINED AS                      See “BEHAVIOUR DEFINED AS” in 30.3.5.1.1;

**aMPCPAdminState**                      **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX                      IEEE802Dot3-MgmtAttributeModule.PortAdminState;  
 MATCHES FOR                                      EQUALITY, ORDERING;  
 BEHAVIOUR                                      bMPCPAdminState;  
 REGISTERED AS                      {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpAdmin-State(278)};

**bMPCPAdminState**                      **BEHAVIOUR**

DEFINED AS                      See “BEHAVIOUR DEFINED AS” in 30.3.5.1.2;

**aMPCPMode****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.MPCPMode;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPMode;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcp-Mode(279)};

**bMPCPMode****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.3;

**aMPCPLinkID****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPLinkID;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcp-LinkID(282)};

**bMPCPLinkID****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.4;

**aMPCPRemoteMACAddress****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.MACAddress;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPRemoteMACAddress;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpRemoteMACAddress(283)};

**bMPCPRemoteMACAddress****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.5;

**aMPCPRegistrationState****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.MPCPRegState;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPRegistrationState;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpRegistrationState(284)};

**bMPCPRegistrationState****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.6;

**aMPCPMACCtrlFramesTransmitted****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPMACCtrlFramesTransmitted;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpMACCtrlFramesTransmitted(280)};

**bMPCPMACCtrlFramesTransmittedBEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.7;

**aMPCPMACCtrlFramesReceived ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPMACCtrlFramesReceived;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpMACCtrlFramesReceived(281)};

**bMPCPMACCtrlFramesReceivedBEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.8;

**aMPCPTxGate ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPTxGate;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) txGate(315)};

**bMPCPTxGate BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.9;

**aMPCPTxRegAck ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPTxRegAck;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) txRegAck(316)};

**bMPCPTxRegAck BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.10;

**aMPCPTxRegister ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPTxRegister;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) txRegister(317)};

**bMPCPTxRegister BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.11;

<b>aMPCPTxRegRequest</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bMPCPTxRegRequest;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) txRegRegister(318)};
<b>bMPCPTxRegRequest</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.5.1.12;
<b>aMPCPTxReport</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bMPCPTxReport;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) txReport(319)};
<b>bMPCPTxReport</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.5.1.13;
<b>aMPCPRxGate</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bMPCPRxGate;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) rxGate(320)};
<b>bMPCPRxGate</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.5.1.14;
<b>aMPCPRxRegAck</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bMPCPRxRegAck;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) rxRegAck(321)};
<b>bMPCPRxRegAck</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.5.1.15;
<b>aMPCPRxRegister</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bMPCPRxRegister;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) rxRegister(322)};

**bMPCPRxRegister****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.16;

**aMPCPRxRegRequest****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPRxRegRequest;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) rxRegRequest(323)};

**bMPCPRxRegRequest****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.17;

**aMPCPRxReport****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPRxReport;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) rxReport(324)};

**bMPCPRxReport****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.18;

**aMPCPTransmitElapsed****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer32;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPTransmitElapsed;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpTransmitElapsed(285)};

**bMPCPTransmitElapsed****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.19;

**aMPCPReceiveElapsed****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer32;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPReceiveElapsed;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpReceiveElapsed(286)};

**bMPCPReceiveElapsed****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.20;

**aMPCPRoundTripTime****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer16;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPRoundTripTime;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpRoundTripTime(287)};

**bMPCPRoundTripTime****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.21;

**aMPCPDiscoveryWindowsSent****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPDiscoveryWindowsSent;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpDiscoveryWindowsSent(288)};

**bMPCPDiscoveryWindowsSent** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.22;

**aMPCPDiscoveryTimeout****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPDiscoveryTimeout;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpDiscoveryTimeout(290)};

**bMPCPDiscoveryTimeout****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.23;

**aMPCPMaximumPendingGrants****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer8;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bMPCPMaximumPendingGrants;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mpcpMaximumPendingGrants(291)};

**bMPCPMaximumPendingGrants****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.1.24;

**acMPCPAdminControl****ACTION**

BEHAVIOUR bMPCPAdminControl;  
 MODE CONFIRMED;  
 WITH INFORMATION SYNTAX IEEE802Dot3-MgmtAttributeModule.AdminState;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) action(9)}

mpcpAdminCtrl(16));

**bMPCPAdminControl****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.3.5.2.1;

**B.4.2 DTE MAC Control function entity attributes****aPAUSELinkDelayAllowance****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX

IEEE802Dot3-

MgmtAttributeModule.LinkDelayAllowance;

BEHAVIOUR

bPAUSELinkDelayAllowance;

REGISTERED AS

{iso(1) std(0) iso8802(8802) csma(3)

csmacdmgt(30) attribute(7) aPAUSELinkDelayAllowance(97));

**bPAUSELinkDelayAllowance****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.4.1;

**aPAUSEMACCtrlFramesTransmitted****ATTRIBUTE**

DERIVED FROM

aCMCounter;

BEHAVIOUR

bPAUSEMACCtrlFramesTransmitted;

REGISTERED AS

{iso(1) std(0) iso8802(8802) csma(3)

csmacdmgt(30) attribute(7) aPAUSEMACCtrlFramesTransmitted(98));

**bPAUSEMACCtrlFramesTransmitted****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.4.2;

**aPAUSEMACCtrlFramesReceived****ATTRIBUTE**

DERIVED FROM

aCMCounter;

BEHAVIOUR

bPAUSEMACCtrlFramesReceived;

REGISTERED AS

{iso(1) std(0) iso8802(8802) csma(3)

csmacdmgt(30) attribute(7) aPAUSEMACCtrlFramesReceived(99));

**bPAUSEMACCtrlFramesReceived****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.3.4.3;

**B.5 Repeater managed object class****B.5.1 Repeater, formal definition****oRepeater****MANAGED OBJECT CLASS**

DERIVED FROM

'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2

1992':top;

CHARACTERIZED BY

```

    pRepeaterBasicControl
      ATTRIBUTES
          aRepeaterID          GET,
          aRepeaterType        GET,
          aRepeaterGroupCapacity GET,
          aGroupMap             GET,
          aRepeaterHealthState GET,
          aRepeaterHealthText  GET,
          aRepeaterHealthData  GET;
      ACTIONS
      NOTIFICATIONS

;
;
CONDITIONAL PACKAGES
    pRepeaterPerfMonitor
      ATTRIBUTES
      REGISTERED AS
          {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)
          package(4)
          repeaterPerfMonitorPkg(9)};
      PRESENT IF
          The Performance Monitor Capability is implemented.;
      REGISTERED AS
          {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)
          managedObjectClass(3) repeaterObjectClass(3)};

```

**nbRepeaterName****NAME BINDING**

```

SUBORDINATE OBJECT CLASS    oRepeater;
NAMED BY SUPERIOR OBJECT CLASS
    "ISO/IEC 10165-2":system AND SUBCLASSES;
WITH ATTRIBUTE
    aRepeaterID;
REGISTERED AS
    {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)
    repeaterName(5)};

```

**nbRepeaterMonitor****NAME BINDING**

```

SUBORDINATE OBJECT CLASS    "IEEE802.1F":oEWMAMetricMonitor;
NAMED BY SUPERIOR OBJECT CLASS
    "ISO/IEC 10165-2":system AND SUBCLASSES;
WITH ATTRIBUTE
    "IEEE802.1F":aScannerId;
    CREATE
    WITH-AUTOMATIC-INSTANCE-NAMING;
    DELETE
    ONLY-IF-NO-CONTAINED-OBJECTS;
REGISTERED AS
    {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)
    repeaterMonitor(6)};

```

**B.5.2 Repeater attributes****aRepeaterID****ATTRIBUTE**

```

WITH ATTRIBUTE SYNTAX
MATCHES FOR
BEHAVIOUR
REGISTERED AS
    IEEE802Dot3-MgmtAttributeModule.OneOfName;
    EQUALITY;
    bRepeaterID;
    {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)}

```

repeaterID(38));

**bRepeaterID****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.1.1.;

**aRepeaterType****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.RepeaterType;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bRepeaterType;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
 repeaterType (39)};

**bRepeaterType****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.1.2.;

**aRepeaterGroupCapacity****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bRepeaterGroupCapacity;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
 repeaterGroupCapacity(40)};

**bRepeaterGroupCapacity****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.1.3.;

**aGroupMap****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.BitString;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bGroupMap;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
 groupMap(41)};

**bGroupMap****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.1.4.;

**aRepeaterHealthState****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.  
 RepeaterHealthState;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bRepeaterHealthState;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
 repeaterHealthState(42)};

**bRepeaterHealthState****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.1.5.;

**aRepeaterHealthText****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.  
RepeaterHealthText;  
MATCHES FOR EQUALITY;  
BEHAVIOUR bRepeaterHealthText;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
repeaterHealthText(43)};

**bRepeaterHealthText****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.1.6.;

**aRepeaterHealthData****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.  
RepeaterHealthData;  
MATCHES FOR EQUALITY;  
BEHAVIOUR bRepeaterHealthData;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
repeaterHealthData(44)};

**bRepeaterHealthData****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.1.7.;

**aTransmitCollisions****ATTRIBUTE**

DERIVED FROM aCMCounter;  
BEHAVIOUR bTransmitCollisions;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
transmitCollisions (45)};

**bTransmitCollisions****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.1.8

NOTE—The approximate minimum time for counter rollover for 10 Mb/s operation is 16 h.;

**B.5.3 Repeater actions****acResetRepeater****ACTION**

BEHAVIOUR bResetRepeater;  
MODE CONFIRMED;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) action(9)  
resetRepeater(6)};

**bResetRepeater****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.2.1.;

**acExecuteNonDisruptiveSelfTest****ACTION**

BEHAVIOUR bExecuteNonDisruptiveSelfTest;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) action(9)  
 executeNonDisruptiveSelfTestAction(7)};

**bExecuteNonDisruptiveSelfTest****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.2.2.;

**B.5.4 Repeater notifications****nRepeaterHealth****NOTIFICATION**

BEHAVIOUR bRepeaterHealth;  
 WITH INFORMATION SYNTAX IEEE802Dot3-MgmtAttributeModule.  
 RepeaterHealthInfo  
 AND ATTRIBUTE IDS repeaterHealthState aRepeaterHealthState,  
 repeaterHealthText aRepeaterHealthText,  
 repeaterHealthData aRepeaterHealthData  
 ;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) notification(10)  
 repeaterHealth(1)};

**bRepeaterHealth****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.3.1.;

**nRepeaterReset****NOTIFICATION**

BEHAVIOUR bRepeaterReset;  
 WITH INFORMATION SYNTAX IEEE802Dot3-MgmtAttributeModule.  
 RepeaterHealthInfo  
 AND ATTRIBUTE IDS repeaterHealthState aRepeaterHealthState,  
 repeaterHealthText aRepeaterHealthText,  
 repeaterHealthData aRepeaterHealthData  
 ;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) notification(10)  
 repeaterReset(2)};

**bRepeaterReset****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.1.3.2.;

**nGroupMapChange****NOTIFICATION**

BEHAVIOUR bGroupMapChange;  
 WITH INFORMATION SYNTAX IEEE802Dot3-MgmtAttributeModule.BitString;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) notification(10)  
 groupMapChange(3)};

**bGroupMapChange****BEHAVIOUR**

DEFINED AS

See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.4.1.3.3.;

**B.6 Group managed object class****B.6.1 Group, formal definition**

oGroup

MANAGED OBJECT CLASS

DERIVED FROM

'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2  
1992':top;

CHARACTERIZED BY

pGroupBasicControl  
ATTRIBUTES

PACKAGE

aGroupID GET,  
aGroupPortCapacity GET,  
aPortMap GET;

NOTIFICATIONS

nPortMapChange;

;  
;

REGISTERED AS

{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)  
managedObjectClass(3) groupObjectClass(4)};

nbGroupName

NAME BINDING

SUBORDINATE OBJECT CLASS

oGroup;

NAMED BY SUPERIOR OBJECT CLASS

oRepeater AND SUBCLASSES;

WITH ATTRIBUTE

aGroupID;

REGISTERED AS

{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
groupName(7)};**B.6.2 Group attributes****aGroupID****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX

IEEE802Dot3-MgmtAttributeModule.OneOfName;

MATCHES FOR

EQUALITY;

BEHAVIOUR

bGroupID;

REGISTERED AS

{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
groupID(46)};**bGroupID****BEHAVIOUR**

DEFINED AS

See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.4.2.1.1.;

**aGroupPortCapacity****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX

IEEE802Dot3-MgmtAttributeModule.OneOfName;

MATCHES FOR

EQUALITY, ORDERING;

BEHAVIOUR bGroupPortCapacity;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
 groupPortCapacity(47)};

**bGroupPortCapacity****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.2.1.2;

**aPortMap****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.BitString;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bPortMap;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
 portMap(48)};

**bPortMap****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.2.1.3;

**B.6.3 Group notifications****nPortMapChange****NOTIFICATION**

BEHAVIOUR bPortMapChange;  
 WITH INFORMATION SYNTAX IEEE802Dot3-MgmtAttributeModule.BitString;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) notification(10)  
 portMapChange(4)};

**bPortMapChange****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.2.2.1;

**B.7 Repeater port managed object class****B.7.1 Port, formal definition****oRepeaterPort****MANAGED OBJECT CLASS**

DERIVED FROM 'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2  
 1992':top;

CHARACTERIZED BY  
 pPortBasicControl  
 ATTRIBUTES

PACKAGE  
 aPortID GET,  
 aPortAdminState GET,  
 aAutoPartitionState GET;  
 acPortAdminControl;

ACTIONS  
 ;  
 ;  
 CONDITIONAL PACKAGES  
 pPortPerfMonitor

PACKAGE

	ATTRIBUTES	aReadableFrames aReadableOctets aFrameCheckSequenceErrors aAlignmentErrors aFramesTooLong aShortEvents aRunts aCollisions aLateEvents aVeryLongEvents aDataRateMismatches aAutoPartitions	GET, GET, GET, GET, GET, GET, GET, GET, GET, GET, GET, GET;
	REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) portPerfMonitorPkg(10)};	
	PRESENT IF	The Performance Monitor Capability is implemented.,	
pPortAddrTracking	ATTRIBUTES	aLastSourceAddress aSourceAddressChanges	GET, GET;
	REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) portAddrTrackPkg(11)};	
	PRESENT IF	The Address Tracking and Performance Monitor capabilities are implemented.,	
p100MbpsMonitor	ATTRIBUTES	alsolates aSymbolErrorDuringPacket	GET, GET;
	REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) port100MbpsMonitor(12)};	
	PRESENT IF	The 100/1000 Mb/s Monitor capability is implemented,	
pBurst	ATTRIBUTES	aBursts	GET;
	REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) portBurst(18)};	
	PRESENT IF	The 1000 Mb/s Burst Monitor capability is implemented;	
	REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) managedObjectClass(3) repeaterPortObjectClass(5)};	
nbPortName			NAME BINDING
	SUBORDINATE OBJECT CLASS NAMED BY SUPERIOR OBJECT CLASS	oRepeaterPort;	
	WITH ATTRIBUTE	oGroup AND SUBCLASSES; aPortID;	
	REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) portName(8)};	

### B.7.2 Port attributes

**aPortID****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;  
 BEHAVIOUR bPortID;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgmt(30) attribute(7)  
 portID(49)};

**bPortID****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.1;

**aPortAdminState****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.  
 PortAdminState;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bPortAdminState;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgmt(30) attribute(7)  
 portAdminState(50)};

**bPortAdminState****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.2;

**aAutoPartitionState****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.  
 AutoPartitionState;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bAutoPartition;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgmt(30) attribute(7)  
 autoPartitionState(51)};

**bAutoPartition****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.3;

**aReadableFrames****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 BEHAVIOUR bReadableFrames;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgmt(30) attribute(7)  
 readableFrames(52)};

**bReadableFrames****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.4

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;

<b>aReadableOctets</b>	<b>ATTRIBUTE</b>
DERIVED FROM BEHAVIOUR REGISTERED AS	aCMCounter; bReadableOctets; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgmt(30) attribute(7) readableOctets(53)};
<b>bReadableOctets</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.5  NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 58 min.;
<b>aFrameCheckSequenceErrors</b>	<b>ATTRIBUTE</b>
DERIVED FROM BEHAVIOUR REGISTERED AS	aCMCounter; bFCSErrors; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgmt(30) attribute(7) frameCheckSequenceErrors(54)};
<b>bFCSErrors</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.6  NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;
<b>aAlignmentErrors</b>	<b>ATTRIBUTE</b>
DERIVED FROM BEHAVIOUR REGISTERED AS	aCMCounter; bAlignmentErrors; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgmt(30) attribute(7) alignmentErrors(55)};
<b>bAlignmentErrors</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.7  NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 80 h.;
<b>aFramesTooLong</b>	<b>ATTRIBUTE</b>
DERIVED FROM BEHAVIOUR REGISTERED AS	aCMCounter; bFramesTooLong; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgmt(30) attribute(7) framesTooLong(56)};
<b>bFramesTooLong</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.8

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 61 days.;

**aShortEvents**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

**ATTRIBUTE**  
  
aCMCounter;  
bShortEvents;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
shortEvents(57)};

**bShortEvents**

DEFINED AS

**BEHAVIOUR**  
  
See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.9

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 16 hours.;

**aRunts**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

**ATTRIBUTE**  
  
aCMCounter;  
bRunts;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
runts(58)};

**bRunts**

DEFINED AS

**BEHAVIOUR**  
  
See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.10

NOTE—The approximate minimum time for counter rollover for 10 Mb/s operation is 16 h.;

**aCollisions**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

**ATTRIBUTE**  
  
aCMCounter;  
bCollisions;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
collisions(59)};

**bCollisions**

DEFINED AS

**BEHAVIOUR**  
  
See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.11

NOTE—The approximate minimum time for counter rollover for 10 Mb/s operation is 16 h.;

**aLateEvents**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

**ATTRIBUTE**  
  
aCMCounter;  
bLateEvents;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
lateEvents(60)};

**bLateEvents****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.12

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 81 h.;

**aVeryLongEvents****ATTRIBUTE**DERIVED FROM  
BEHAVIOUR  
REGISTERED ASaCMCounter;  
bVeryLongEvents;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
veryLongEvents(61)};**bVeryLongEvents****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.13

NOTE—The approximate minimum time between counter rollovers for 10 Mb/s operation is 198 days.;

**aDataRateMismatches****ATTRIBUTE**DERIVED FROM  
BEHAVIOUR  
REGISTERED ASaCMCounter;  
bDataRateMismatches;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
dataRateMismatches(62)};**bDataRateMismatches****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.14;

**aAutoPartitions****ATTRIBUTE**DERIVED FROM  
BEHAVIOUR  
REGISTERED ASaCMCounter;  
bAutoPartitions;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
autoPartitions(63)};**bAutoPartitions****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.15;

**aIsolates****ATTRIBUTE**DERIVED FROM  
BEHAVIOUR  
REGISTERED ASaCMCounter;  
bIsolates;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
isolates(64)};**bIsolates****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.16;

**aSymbolErrorDuringPacket****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bSymbolErrorDuringPacket;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
symbolErrorDuringPacket(65)};

**bSymbolErrorDuringPacket****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.17;

**aLastSourceAddress****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS

IEEE802CommonDefinitions.MACAddress;  
EQUALITY;  
bLastSourceAddress;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
lastSourceAddress(66)};

**bLastSourceAddress****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.18;

**aSourceAddressChanges****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bSourceAddressChanges;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
sourceAddressChanges(67)};

**bSourceAddressChanges****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.19

NOTE—The approximate minimum time for counter rollover for 10 Mb/s operation is 81 h.;

**aBursts****ATTRIBUTE**

DERIVED FROM  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
bBursts;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
bursts(100)};

**bBursts****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.4.3.1.20;

**B.7.3 Port actions****acPortAdminControl****ACTION**

BEHAVIOUR

bPortAdminControl;

WITH INFORMATION SYNTAX IEEE802Dot3-MgmtAttributeModule.  
 PortAdminState;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) action(9)  
 portAdminControl(8)};

**bPortAdminControl****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.4.3.2.1;

**B.8 MAU managed object class****B.8.1 MAU, formal definition**

oMAU MANAGED OBJECT CLASS

DERIVED FROM 'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2 :1992':top;  
 CHARACTERIZED BY  
 pMAUBasic PACKAGE  
 ATTRIBUTES aMAUID GET,  
 aMAUType GET-REPLACE,  
 aMAUTypeList GET,  
 aMediaAvailable GET,  
 aJabber GET,  
 aMAUAdminState GET;  
 NOTIFICATIONS nJabber;  
 ;  
 ;  
 CONDITIONAL PACKAGES  
 pMAUControl PACKAGE  
 ACTIONS acResetMAU,  
 acMAUAdminControl;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4)  
 mauControlPkg(13)};  
 PRESENT IF The pMAUControl package is implemented.,  
 pMediaLossTracking PACKAGE  
 ATTRIBUTES aLoseMediaCounterGET;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) mediaLoss-  
 TrackingPkg(14)};  
 PRESENT IF MAU TypeValue = AUI or if the pMediaLossTracking package is implemented.,  
 pBroadbandDTEMAU PACKAGE  
 ATTRIBUTES aBbMAUXmitRcvSplitType GET,  
 aBroadbandFrequencies GET;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) broadband-  
 MAUPkg(15)};  
 PRESENT IF The MAU is of type 10BROAD36.,  
 p100MbpsMonitor PACKAGE  
 ATTRIBUTES aFalseCarriers GET,  
 aIdleErrorCount GET;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4)  
 mau100MbpsMonitor(16)};  
 PRESENT IF The MAU is capable of 100 Mb/s operation.,  
 pPHY10GBTMargin PACKAGE

ATTRIBUTES  
     aSNROpMarginChnlA GET,  
     aSNROpMarginChnlB GET,  
     aSNROpMarginChnlC GET,  
     aSNROpMarginChnlD GET;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4)  
     phy10GBTMargin(39)};  
 PRESENT IF The MAU is capable of 10GBASE-T operation.,  
     pPCSMonitor PACKAGE  
     ATTRIBUTES aPCSCodingViolation GET;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) pcsMoni-  
     tor(35)};  
 PRESENT IF The MAU PCS code error monitoring capability is implemented.,  
     pFECMonitor PACKAGE  
     ATTRIBUTES aFECAbility GET,  
     aFECmode GET-REPLACE,  
     aFECCorrectedBlocks GET,  
     aFECUncorrectableBlocks GET;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) fecMoni-  
     tor(30)};  
 PRESENT IF The MAU is capable of FEC operation.;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) managedObjectClass(3)  
     mauObjectClass(6)};

**nbMAU-repeaterName****NAME BINDING**

SUBORDINATE OBJECT CLASS oMAU;  
 NAMED BY SUPERIOR OBJECT CLASS --(of oRepeaterPort)  
     oRepeaterPort AND SUBCLASSES;  
     --{1.0.8802.3.30.3.5}  
 WITH ATTRIBUTE aMAUID;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
     mau-repeaterName(9)};

**nbMAU-dteName****NAME BINDING**

SUBORDINATE OBJECT CLASS oMAU;  
 NAMED BY SUPERIOR OBJECT CLASS --(of oPHYEntity)  
     oPHYEntity AND SUBCLASSES;  
     --{1.0.8802.3.30.3.2}  
 WITH ATTRIBUTE aMAUID;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
     mau-dteName(10)};

**B.8.2 MAU attributes****aMAUID****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bMAUID;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
     mauID(68)};

<b>bMAUID</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.5.1.1.1;
<b>aMAUType</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.TypeValue;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bMAUType;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mauType(69)};
<b>bMAUType</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.5.1.1.2;
<b>aMAUTypeList</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.TypeList;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bMAUTypeList;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mauTypeList(70)};
<b>bMAUTypeList</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.5.1.1.3;
<b>aMediaAvailable</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.
	MediaAvailState;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bMediaAvailable;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mauMediaAvailable(71)};
<b>bMediaAvailable</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.5.1.1.4;
<b>aLoseMediaCounter</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bLoseMediaCounter;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mauLoseMediaCounter(72)};
<b>bLoseMediaCounter</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.5.1.1.5;

<b>aJabber</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.Jabber;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bJabberAttribute;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) jabber(73)};
<b>bJabberAttribute</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.5.1.1.6;
<b>aMAUAdminState</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.AdminState;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bMAUAdminState;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) mauAdminState(74)};
<b>bMAUAdminState</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.5.1.1.7;
<b>aBbMAUXmitRcvSplitType</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.
MATCHES FOR	BbandXmitRcvSplitType;
BEHAVIOUR	EQUALITY;
REGISTERED AS	bBbMAUXmitRcvSplitType;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) bBandSplitType(75)};
<b>bBbMAUXmitRcvSplitType</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.5.1.1.8;
<b>aBroadbandFrequencies</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.
MATCHES FOR	BbandFrequency;
BEHAVIOUR	EQUALITY;
REGISTERED AS	bBroadbandFrequencies;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) bBandFrequencies(76)};
<b>bBroadbandFrequencies</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.5.1.1.9;
<b>aFalseCarriers</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;

MATCHES FOR BEHAVIOUR	EQUALITY, ORDERING; bFalseCarriers;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) falseCarriers(77)};
<b>bFalseCarriers</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.5.1.1.10;
<b>aIdleErrorCount</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX BEHAVIOUR	IEEE802Dot3-MgmtAttributeModule.RegisterEight; bIdleErrorCount;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) idleErrorCount(91)};
<b>bIdleErrorCount</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.5.1.1.11;
<b>aSNROpMarginChnlA</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR	IEEE802Dot3-MgmtAttributeModule.Integer16; EQUALITY, ORDERING; bSNROpMarginChnlA;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) sNROpMar- ginChnlA(353)};
<b>bSNROpMarginChnlA</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.5.1.1.17;
<b>aSNROpMarginChnlB</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR	IEEE802Dot3-MgmtAttributeModule.Integer16; EQUALITY, ORDERING; bSNROpMarginChnlB;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) sNROpMar- ginChnlB(354)};
<b>bSNROpMarginChnlB</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.5.1.1.18;
<b>aSNROpMarginChnlC</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR	IEEE802Dot3-MgmtAttributeModule.Integer16; EQUALITY, ORDERING; bSNROpMarginChnlC;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) sNROpMar- ginChnlC(355)};

**bSNROpMarginChnlC****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.5.1.1.19;

**aSNROpMarginChnlD****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer16;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bSNROpMarginChnlD;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) sNROpMarginChnlD(356)};

**bSNROpMarginChnlD****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.5.1.1.20;

**aPCSCodingViolation****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bPCSCodingViolation;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pcsCodingViolation(292)};

**bPCSCodingViolation****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.5.1.1.12;

**aFECAbility****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.FECMode;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bFECAbility;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) fecAbility(313)};

**bFECAbility****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.5.1.1.13;

**aFECmode****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.FECMode;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bFECmode;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) fecMode(314)};

**bFECmode****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.5.1.1.14;

**aFECCorrectedBlocks****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bFECCorrectedBlocks;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) fecCorrected-Blocks(293)};

**bFECCorrectedBlocks****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.5.1.1.15;

**aFECUncorrectableBlocks****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bFECUncorrectableBlocks;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) fecUncorrectableBlocks(294)};

**bFECUncorrectableBlocks****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.5.1.1.16;

**B.8.3 MAU actions****acResetMAU****ACTION**

BEHAVIOUR bResetMAU;  
 MODE CONFIRMED;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) action(9) resetMAU(9)};

**bResetMAU****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.5.1.2.1;

**acMAUAdminControl****ACTION**

BEHAVIOUR bMAUAdminControl;  
 MODE CONFIRMED;  
 WITH INFORMATION SYNTAX IEEE802Dot3-MgmtAttributeModule.AdminState;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) action(9) mauAdminCtrl(10)};

**bMAUAdminControl****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.5.1.2.2;

**B.8.4 MAU notifications****nJabber****NOTIFICATION**

BEHAVIOUR  
 WITH INFORMATION SYNTAX  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) notification(10) jabber(5)};

bJabberNotification;  
 IEEE802Dot3-MgmtAttributeModule.Jabber;

**bJabberNotification****BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in IEEE Std 802.3 30.5.1.3.1;

**B.9 AutoNegotiation managed object class****B.9.1 AutoNegotiation, formal definition****oAutoNegotiation****MANAGED OBJECT CLASS**

DERIVED FROM 'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2 :1992':top;  
 CHARACTERIZED BY

pAutoNeg

ATTRIBUTES

aAutoNegID GET,  
 aAutoNegAdminState GET,  
 aAutoNegRemoteSignaling GET,  
 aAutoNegAutoConfig GET-REPLACE,  
 aAutoNegLocalTechnologyAbility GET,  
 aAutoNegAdvertisedTechnologyAbility GET-REPLACE,  
 aAutoNegReceivedTechnologyAbility GET,  
 aAutoNegLocalSelectorAbility GET,  
 aAutoNegAdvertisedSelectorAbility GET-REPLACE,  
 aAutoNegReceivedSelectorAbility GET;

ACTIONS

acAutoNegRestartAutoConfig,  
 acAutoNegAdminControl;

;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) managedObjectClass(3) autoNegObjectClass(7)};

**nbAutoNeg-mauName****NAME BINDING**

SUBORDINATE OBJECT CLASS oAutoNegotiation;  
 NAMED BY SUPERIOR OBJECT CLASS --(of oMAU)  
 oMAU AND SUBCLASSES;  
 --{1.0.8802.3.30.3.6}

WITH ATTRIBUTE aMAUID;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) autoNeg-mauName(1)};

**B.9.2 Auto-Negotiation attributes**

<b>aAutoNegID</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR BEHAVIOUR	EQUALITY; bAutoNegID;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) autoNegID(78)};
<b>bAutoNegID</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.1.1;
<b>aAutoNegAdminState</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule. AutoNegAdminState;
MATCHES FOR BEHAVIOUR	EQUALITY; bAutoNegAdminState;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) autoNegAdminState(79)};
<b>bAutoNegAdminState</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.1.2;
<b>aAutoNegRemoteSignaling</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule. AutoNegRemoteSignalingDetect;
MATCHES FOR BEHAVIOUR	EQUALITY; bAutoNegRemoteSignaling;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) autoNegRemoteSignaling(80)};
<b>bAutoNegRemoteSignaling</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.1.3;
<b>aAutoNegAutoConfig</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule. AutoNegAutoConfig;
MATCHES FOR BEHAVIOUR	EQUALITY; bAutoNegAutoConfig;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) autoNegAutoConfig(81)};
<b>bAutoNegAutoConfig</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.1.4;

<b>aAutoNegLocalTechnologyAbility</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.
MATCHES FOR BEHAVIOUR	AutoNegTechnologyList; EQUALITY, ORDERING;
REGISTERED AS	bAutoNegLocalTechnologyAbility; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) autoNegLocalTechnologyAbility(82)};
<b>bAutoNegLocalTechnologyAbility</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.1.5;
<b>aAutoNegAdvertisedTechnologyAbility</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.
MATCHES FOR BEHAVIOUR	AutoNegTechnologyList; EQUALITY, ORDERING;
REGISTERED AS	bAutoNegAdvertisedTechnologyAbility; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) autoNegAdvertisedTechnologyAbility(83)};
<b>bAutoNegAdvertisedTechnologyAbility</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.1.6;
<b>aAutoNegReceivedTechnologyAbility</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.
MATCHES FOR BEHAVIOUR	AutoNegTechnologyList; EQUALITY, ORDERING;
REGISTERED AS	bAutoNegReceivedTechnologyAbility; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) autoNegReceivedTechnologyAbility(84)};
<b>bAutoNegReceivedTechnologyAbility</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.1.7;
<b>aAutoNegLocalSelectorAbility</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.
MATCHES FOR BEHAVIOUR	AutoNegSelectorList; EQUALITY, ORDERING;
REGISTERED AS	bAutoNegLocalSelectorAbility; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) autoNegLocalSelectorAbility(85)};
<b>bAutoNegLocalSelectorAbility</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.1.8;

**aAutoNegAdvertisedSelectorAbility ATTRIBUTE**

WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule. AutoNegSelectorList;
MATCHES FOR BEHAVIOUR	EQUALITY, ORDERING; bAutoNegAdvertisedSelectorAbility;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) autoNegAdvertisedSelectorAbility(86)};

**bAutoNegAdvertisedSelectorAbility BEHAVIOUR**

DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.1.9;
------------	--

**aAutoNegReceivedSelectorAbility ATTRIBUTE**

WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule. AutoNegSelectorList;
MATCHES FOR BEHAVIOUR	EQUALITY, ORDERING; bAutoNegReceivedSelectorAbility;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) autoNegReceivedSelectorAbility(87)};

**bAutoNegReceivedSelectorAbility BEHAVIOUR**

DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.1.10;
------------	---

**B.9.3 AutoNegotiation actions****acAutoNegRestartAutoConfig ACTION**

BEHAVIOUR MODE	bAutoNegRestartAutoConfig; CONFIRMED;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) action(9) autoNegRestartAutoConfig(11)};

**bAutoNegRestartAutoConfig BEHAVIOUR**

DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.2.1;
------------	--

**acAutoNegAdminControl ACTION**

BEHAVIOUR MODE	bAutoNegAdminControl; CONFIRMED;
WITH INFORMATION SYNTAX	IEEE802Dot3-MgmtAttributeModule. AutoNegAdminState;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) action(9) autoNegAdminCtrl(12)};

**bAutoNegAdminControl BEHAVIOUR**

DEFINED AS	See “BEHAVIOUR DEFINED AS” in IEEE Std 802.3 30.6.1.2.2;
------------	--

## B.10 ResourceTypeID managed object class

### B.10.1 ResourceTypeID, formal definition

- Implementation of this managed object in accordance with the definition contained in IEEE Std 802.1F-1993 is a conformance requirement of this standard.
- NOTE—A single instance of the Resource Type ID managed object exists within the oMACEntity managed object class, a single instance of the Resource Type ID managed object exists within the oRepeater managed object class, and a single instance of the Resource Type ID managed object exists within the oMAU managed object class conditional on the presence of an MII.
- The managed object itself is contained in IEEE Std 802.1F-1993, therefore only name bindings appear in this standard;

#### nbResourceTypeID-mac

#### NAME BINDING

SUBORDINATE OBJECT CLASS      “IEEE802.1F”:oResourceTypeID;  
 NAMED BY SUPERIOR OBJECT CLASS  
    oMACEntity;  
 WITH ATTRIBUTE                    “IEEE802.1F”:aResourceTypeIDName;  
 REGISTERED AS                    {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
    resourceTypeID-mac(12)};

#### nbResourceTypeID-repeater

#### NAME BINDING

SUBORDINATE OBJECT CLASS      “IEEE802.1F”:oResourceTypeID;  
 NAMED BY SUPERIOR OBJECT CLASS  
    oRepeater AND SUBCLASSES;  
 WITH ATTRIBUTE                    “IEEE802.1F”:aResourceTypeIDName;  
 REGISTERED AS                    {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
    resourceTypeID-repeater(13)};

#### nbResourceTypeID-mau

#### NAME BINDING

SUBORDINATE OBJECT CLASS      “IEEE802.1F”:oResourceTypeID;  
 NAMED BY SUPERIOR OBJECT CLASS  
    oMAU AND SUBCLASSES;  
 WITH ATTRIBUTE                    “IEEE802.1F”:aResourceTypeIDName;  
 REGISTERED AS                    {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
    resourceTypeID-mau(14)};

#### nbResourceTypeID-midSpan

#### NAME BINDING

SUBORDINATE OBJECT CLASS      “IEEE802.1F”:oResourceTypeID;  
 NAMED BY SUPERIOR OBJECT CLASS oMidSpan AND SUBCLASSES;  
 WITH ATTRIBUTE                    aMidSpanID;  
 REGISTERED AS                    {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
    resourceTypeID-midSpan(25)};

**B.11 WIS managed object class****B.11.1 WIS, formal definition**

```

oWIS                                MANAGED OBJECT CLASS

DERIVED FROM                            'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2 :1992':top;
CHARACTERIZED BY
    pWISBasic
    ATTRIBUTES
        aWISID                            GET,
        aSectionStatus                    GET,
        aLineStatus                        GET,
        aPathStatus                        GET,
        aFarEndPathStatus                 GET;
;
;
CONDITIONAL PACKAGES
    pWISOptional
    ATTRIBUTES
        aSectionSESThreshold             GET-REPLACE,
        aSectionSESs                     GET,
        aSectionESs                       GET,
        aSectionSEFSs                    GET,
        aSectionCVs                       GET,
        aJ0ValueTX                        GET-REPLACE,
        aJ0ValueRX                        GET,
        aLineSESThreshold                 GET-REPLACE,
        aLineSESs                         GET,
        aLineESs                          GET,
        aLineCVs                          GET,
        aFarEndLineSESs                   GET,
        aFarEndLineESs                    GET,
        aFarEndLineCVs                    GET,
        aPathSESThreshold                 GET-REPLACE,
        aPathSESs                         GET,
        aPathESs                          GET,
        aPathCVs                          GET,
        aJ1ValueTX                        GET-REPLACE,
        aJ1ValueRX                        GET,
        aFarEndPathSESs                   GET,
        aFarEndPathESs                    GET,
        aFarEndPathCVs                    GET;
REGISTERED AS
    {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) pack-
age(4) wisOptionalPkg(26)};
PRESENT IF The optional package is implemented;
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) managedObjectClass(3)
wisObjectClass(14)};

```

**nbWIS-mauName****NAME BINDING**

```

SUBORDINATE OBJECT CLASS    oWIS;
NAMED BY SUPERIOR OBJECT CLASS oMAU AND SUBCLASSES;
WITH ATTRIBUTE              aWISID;

```

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) wis-mau-Name(24)};

### B.11.2 WIS attributes

#### aWISID

#### ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bWISID;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) wisID(181)};

#### bWISID

#### BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.1;

#### aSectionStatus

#### ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.SectionStatus;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bSectionStatus;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) sectionStatus(182)};

#### bSectionStatus

#### BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.2;

#### aSectionSESThreshold

#### ATTRIBUTE

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.SESThreshold;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bSectionSESThreshold;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) sectionSESThreshold(183)};

#### bSectionSESThreshold

#### BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.3

NOTE—This counter has a maximum increment rate of 1 count per second.;

#### aSectionSEs

#### ATTRIBUTE

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bSectionSEs;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) sectionSEs(184)};

#### bSectionSEs

#### BEHAVIOUR

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.4

NOTE—This counter has a maximum increment rate of 1 count per second.;

**aSectionESs****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bSectionESs;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) section-  
 ESs(185)};

**bSectionESs****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.5;

**aSectionSEFSs****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bSectionSEFSs;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) section-  
 SEFSs(186)};

**bSectionSEFSs****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.6

NOTE—This counter has a maximum increment rate of 1 count per second.;

**aSectionCVs****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bSectionCVs;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) section-  
 CVs(187)};

**bSectionCVs****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.7

NOTE—This counter has a maximum increment rate of 64 000 counts per second.;

**aJ0ValueTX****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.JValue;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bJ0ValueTX;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
 j0ValueTX(188)};

**bJ0ValueTX****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.8;

**aJ0ValueRX****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.JValue;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bJ0ValueRX;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) j0ValueRX(189)};

**bJ0ValueRX****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.9;

**aLineStatus****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.LineStatus;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bLineStatus;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) lineStatus(190)};

**bLineStatus****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.10;

**aLineSESThreshold****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.SESThreshold;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bLineSESThreshold;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) lineSESThreshold(191)};

**bLineSESThreshold****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.11;

**aLineSESS****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bLineSESSs;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) lineSESSs(192)};

**bLineSESS****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.12

NOTE—This counter has a maximum increment rate of 1 count per second.;

**aLineESs****ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;

BEHAVIOUR bLineESs;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) lineESs(193)};

**bLineESs** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.13

NOTE—This counter has a maximum increment rate of 1 count per second.;

**aLineCVs** **ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bLineCVs;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) lineCVs(194)};

**bLineCVs** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.14

NOTE—This counter has a maximum increment rate of 12 288 000 counts per second.;

**aFarEndLineSESSs** **ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bFarEndLineSESSs;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) farEndLineSESSs(195)};

**bFarEndLineSESSs** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.15

NOTE—This counter has a maximum increment rate of 1 count per second.;

**aFarEndLineESs** **ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bFarEndLineESs;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) farEndLineESs(196)};

**bFarEndLineESs** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.16

NOTE—This counter has a maximum increment rate of 1 count per second.;

**aFarEndLineCVs** **ATTRIBUTE**

DERIVED FROM aCMCounter;

MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bFarEndLineCVs;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) farEnd-  
 LineCVs(197)};

**bFarEndLineCVs** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.17

NOTE—This counter has a maximum increment rate of 2 040 000 counts per second.;

**aPathStatus** **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PathStatus;  
 MATCHES FOR EQUALITY;  
 BEHAVIOUR bPathStatus;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pathSta-  
 tus(198)};

**bPathStatus** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.18;

**aPathSESThreshold** **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.SESThreshold;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bPathSESThreshold;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pathSES-  
 Threshold(199)};

**bPathSESThreshold** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.19;

**aPathSEs** **ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bPathSEs;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) path-  
 SEs(200)};

**bPathSEs** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.20

NOTE—This counter has a maximum increment rate of 1 count per second.;

**aPathESs** **ATTRIBUTE**

DERIVED FROM aCMCounter;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bPathESs;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
pathESs(201)};

**bPathESs** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.21

NOTE—This counter has a maximum increment rate of 1 count per second.;

**aPathCVs** **ATTRIBUTE**

DERIVED FROM aCMCounter;  
MATCHES FOR EQUALITY, ORDERING;  
BEHAVIOUR bPathCVs;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
pathCVs(202)};

**bPathCVs** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.22

NOTE—This counter has a maximum increment rate of 8000 counts per second.;

**aJ1ValueTX** **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.JValue;  
MATCHES FOR EQUALITY, ORDERING;  
BEHAVIOUR bJ1ValueTX;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
j1ValueTX(203)};

**bJ1ValueTX** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.23;

**aJ1ValueRX** **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.JValue;  
MATCHES FOR EQUALITY, ORDERING;  
BEHAVIOUR bJ1ValueRX;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
j1ValueRX(204)};

**bJ1ValueRX** **BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.24;

**aFarEndPathStatus** **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.FarEndPathStatus;  
MATCHES FOR EQUALITY;  
BEHAVIOUR bFarEndPathStatus;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) farEndPathStatus(205)};

**bFarEndPathStatus****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.25;

**aFarEndPathSESSs****ATTRIBUTE**

DERIVED FROM aCMCounter;  
MATCHES FOR EQUALITY, ORDERING;  
BEHAVIOUR bFarEndPathSESSs;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) farEndPathSESSs(206)};

**bFarEndPathSESSs****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.26

NOTE—This counter has a maximum increment rate of 1 count per second.;

**aFarEndPathESs****ATTRIBUTE**

DERIVED FROM aCMCounter;  
MATCHES FOR EQUALITY, ORDERING;  
BEHAVIOUR bFarEndPathESs;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) farEndPathESs(207)};

**bFarEndPathESs****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.27

NOTE—This counter has a maximum increment rate of 1 count per second.;

**aFarEndPathCVs****ATTRIBUTE**

DERIVED FROM aCMCounter;  
MATCHES FOR EQUALITY, ORDERING;  
BEHAVIOUR bFarEndPathCVs;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) farEndPathCVs(208)};

**bFarEndPathCVs****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.8.1.1.28

NOTE—This counter has a maximum increment rate of counts 8000 per second.;

**B.12 PSE managed object class****B.12.1 PSE, formal definition**

**oPSE****MANAGED OBJECT CLASS**

DERIVED FROM 'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2 :1992':top;

CHARACTERIZED BY

pPSEBasic

ATTRIBUTES

aPSEID GET,  
aPSEAdminState GET,  
aPSEPowerPairsControlAbility GET,  
aPSEPowerPairs GET-REPLACE,  
aPSEPowerDetectionStatus GET;  
acPSEAdminControl;

ACTIONS

;

;

CONDITIONAL PACKAGES

pPSERecommended

ATTRIBUTES

aPSEPowerClassification GET,  
aPSEInvalidSignatureCounter GET,  
aPSEPowerDeniedCounter GET,  
aPSEOverLoadCounter GET,  
aPSEShortCounter GET,  
aPSEMPSAbsentCounter GET;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)  
package(4) pseRecommendedPkg(27)};

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)  
package(4) pseRecommendedPkg(27)};

PRESENT IF The recommended package is implemented;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)  
managedObjectClass(3) pseObjectClass(15)};

**nbPSE-repeaterPortName****NAME BINDING**

SUBORDINATE OBJECT CLASS oPSE;

NAMED BY SUPERIOR OBJECT CLASS oRepeaterPort AND SUBCLASSES;

WITH ATTRIBUTE aPSEID;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
pse-repeaterPortName(26)};

**nbPSE-dteName****NAME BINDING**

SUBORDINATE OBJECT CLASS oPSE;

NAMED BY SUPERIOR OBJECT CLASS oPHYEntity AND SUBCLASSES;

WITH ATTRIBUTE aPSEID;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
pse-dteName(27)};

**nbPSE-pseGroupName****NAME BINDING**

SUBORDINATE OBJECT CLASS oPSE;

NAMED BY SUPERIOR OBJECT CLASS oPSEGroup AND SUBCLASSES;

WITH ATTRIBUTE aPSEID;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)  
pse-pseGroupName(28)};

**B.12.2 PSE attributes**

**aPSEID****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS

IEEE802Dot3-MgmtAttributeModule.OneOfName;  
EQUALITY;  
bPSEID;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
pseID(209)};

**bPSEID****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.9.1.1.1;

**aPSEAdminState****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS

IEEE802Dot3-  
MgmtAttributeModule.PortAdminState;  
EQUALITY;  
bPSEAdminState;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
pseAdminState(210)};

**bPSEAdminState****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.8.1.1.2;

**aPSEPowerPairsControlAbility****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS

IEEE802Dot3-  
MgmtAttributeModule.PairCtrlAbility;  
EQUALITY;  
bPSEPowerPairsControlAbility;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
psePowerPairsControlAbility(211)};

**bPSEPowerPairsControlAbility****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.8.1.1.3;

**aPSEPowerPairs****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS

IEEE802Dot3-  
MgmtAttributeModule.PSEPowerPairs;  
EQUALITY;  
bPSEPowerPairs;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
psePowerPairs(212)};

**bPSEPowerPairs****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.8.1.1.4;

**aPSEPowerDetectionStatus****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX

IEEE802Dot3-MgmtAttributeModule.DetectStatus;

MATCHES FOR BEHAVIOUR REGISTERED AS	EQUALITY; bPSEPowerDetectionStatus; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) psePowerDetectionStatus(214)};
<b>bPSEPowerDetectionStatus</b>	<b>BEHAVIOUR</b>
DEFINED AS	See "BEHAVIOUR DEFINED AS" in 30.8.1.1.11;
<b>aPSEPowerClassification</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.PowerClass; EQUALITY; bPSEPowerClassification; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) psePowerClassification(215)};
<b>bPSEPowerClassification</b>	<b>BEHAVIOUR</b>
DEFINED AS	See "BEHAVIOUR DEFINED AS" in 30.9.1.1.6;
<b>aPSEInvalidSignatureCounter</b>	<b>ATTRIBUTE</b>
DERIVED FROM MATCHES FOR BEHAVIOUR REGISTERED AS	aCMCounter; EQUALITY; bPSEInvalidSignatureCounter; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)pseInvalidSignatureCounter(227)};
<b>bPSEInvalidSignatureCounter</b>	<b>BEHAVIOUR</b>
DEFINED AS	See "BEHAVIOUR DEFINED AS" in 30.8.1.1.5;
<b>aPSEPowerDeniedCounter</b>	<b>ATTRIBUTE</b>
DERIVED FROM MATCHES FOR BEHAVIOUR REGISTERED AS	aCMCounter; EQUALITY; bPSEPowerDeniedCounter; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)psePowerDeniedCounter(228)};
<b>bPSEPowerDeniedCounter</b>	<b>BEHAVIOUR</b>
DEFINED AS	See "BEHAVIOUR DEFINED AS" in 30.9.1.1.8;
<b>aPSEOverLoadCounter</b>	<b>ATTRIBUTE</b>
DERIVED FROM MATCHES FOR BEHAVIOUR REGISTERED AS	aCMCounter; EQUALITY; bPSEOverLoadCounter; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)pseOverLoadCounter(229)};
<b>bPSEOverLoadCounter</b>	<b>BEHAVIOUR</b>

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.9.1.1.9;

**aPSEShortCounter****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
EQUALITY;  
bPSEShortCounter;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)  
attribute(7)pseShortCounter(230)};

**bPSEShortCounter****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.9.1.1.10;

**aPSEMPSAbsentCounter****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS

aCMCounter;  
EQUALITY;  
bPSEMPSAbsentCounter;  
{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)  
pseMPSAbsentCounter(217)};

**bPSEMPSAbsentCounter****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.9.1.1.11;

**B.12.3 PSE actions****acPSEAdminControl****ACTION**

BEHAVIOUR  
MODE  
WITH INFORMATION SYNTAX

bPSEAdminControl;  
CONFIRMED;  
IEEE802Dot3-  
MgmtAttributeModule.PortAdminState;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) action(9)  
pseAdminControl(13)};

**bPSEAdminControl****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.9.1.2.1;

**B.13 Midspan managed object class****oMidSpan****MANAGED OBJECT CLASS**

DERIVED FROM

'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2  
:1992':top;

CHARACTERIZED BY  
pMidSpanBasic  
ATTRIBUTES

PACKAGE  
aMidSpanID GET,  
aMidSpanPSEGroupCapacity GET,  
aMidSpanPSEGroupMap GET;

```

NOTIFICATIONS      nMidSpanPSEGroupMapChange;
;
REGISTERED AS      {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30)
managedObjectClass(3) midSpanObjectClass(17)};

```

**nbMidSpanName****NAME BINDING**

```

SUBORDINATE OBJECT CLASS      oMidSpan;
NAMED BY SUPERIOR OBJECT CLASS “ISO/IEC 10165-2”:system AND SUBCLASSES;
WITH ATTRIBUTE                aMidSpanID;
REGISTERED AS                  {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)
midSpanName(31)};

```

**nbMidSpanMonitor****NAME BINDING**

```

SUBORDINATE OBJECT CLASS      “IEEE802.1F”:oEWMAMetricMonitor;
NAMED BY SUPERIOR OBJECT CLASS “ISO/IEC 10165-2”:system AND SUBCLASSES;
WITH ATTRIBUTE                “IEEE802.1F”:aScannerId;
CREATE                        WITH-AUTOMATIC-INSTANCE-NAMING;
DELETE                        ONLY-IF-NO-CONTAINED-OBJECTS;
REGISTERED AS                  {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6)
midSpanMonitor(32)};

```

**B.13.1 Midspan attributes****aMidSpanID****ATTRIBUTE**

```

WITH ATTRIBUTE SYNTAX        IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR                  EQUALITY;
BEHAVIOUR                    bMidSpanID;
REGISTERED AS                  {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)
midSpanID(221)};

```

**bMidSpanID****BEHAVIOUR**

```

DEFINED AS                    See “BEHAVIOUR DEFINED AS” in 30.10.1.1.1;

```

**aMidSpanPSEGroupCapacity****ATTRIBUTE**

```

WITH ATTRIBUTE SYNTAX        IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR                  EQUALITY,ORDERING;
BEHAVIOUR                    bMidSpanPSEGroupCapacity;
REGISTERED AS                  {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7)
midSpanPSEGroupCapacity(222)};

```

**bMidSpanPSEGroupCapacity****BEHAVIOUR**

```

DEFINED AS                    See “BEHAVIOUR DEFINED AS” in 30.10.1.1.2;

```

**aMidSpanPSEGroupMap****ATTRIBUTE**

```

WITH ATTRIBUTE SYNTAX        IEEE802Dot3-MgmtAttributeModule.BitString;

```

MATCHES FOR BEHAVIOUR REGISTERED AS	EQUALITY; bMidSpanPSEGroupMap; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) midSpanPSEGroupMap(223)};
---	---

**bMidSpanPSEGroupMap****BEHAVIOUR**

DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.10.1.1.3;
------------	--

**B.13.2 Midspan notifications****nMidSpanPSEGroupMapChange****NOTIFICATION**

BEHAVIOUR WITH INFORMATION SYNTAX REGISTERED AS	bMidSpanPSEGroupMapChange; IEEE802Dot3-MgmtAttributeModule.BitString; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) notification(10)midSpanPSEGroupMapChange(8)};
---	---

**bMidSpanPSEGroupMapChange****BEHAVIOUR**

DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.10.1.2.1;
------------	--

**B.14 PSE Group managed object class****oPSEGroup****MANAGED OBJECT CLASS**

DERIVED FROM	'CCITT Rec. X.721 (1992)   ISO/IEC 10165-2 :1992':top;
CHARACTERIZED BY	
pPSEGroupBasic	PACKAGE
ATTRIBUTES	aPSEGroupID           GET, aPSECapacity         GET, aPSEMap               GET;
NOTIFICATIONS	nPSEMapChange;
;	
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) managedObjectClass(3) midSpanGroupObjectClass(18)};

**nbPSEGroupName****NAME BINDING**

SUBORDINATE OBJECT CLASS	oPSEGroup;
NAMED BY SUPERIOR OBJECT CLASS	oMidSpan AND SUBCLASSES;
WITH ATTRIBUTE	aPSEGroupID;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) pseGroupName(33)};

**B.14.1 PSE Group attributes****aPSEGroupID****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR	EQUALITY;
BEHAVIOUR	bPSEGroupID;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pseGroupID(224)};
<b>bPSEGroupID</b>	<b>BEHAVIOUR</b>
DEFINED AS	See "BEHAVIOUR DEFINED AS" in 30.10.2.1.1;
<b>aPSECapacity</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR	EQUALITY,ORDERING;
BEHAVIOUR	bPSECapacity;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pseCapacity(225)};
<b>bPSECapacity</b>	<b>BEHAVIOUR</b>
DEFINED AS	See "BEHAVIOUR DEFINED AS" in 30.10.2.1.2;
<b>aPSEMap</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.BitString;
MATCHES FOR	EQUALITY;
BEHAVIOUR	bPSEMap;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pseMap(226)};
<b>bPSEMap</b>	<b>BEHAVIOUR</b>
DEFINED AS	See "BEHAVIOUR DEFINED AS" in 30.10.2.1.3;

## B.14.2 PSE Group notifications

<b>nPSEMapChange</b>	<b>NOTIFICATION</b>
BEHAVIOUR	bPSEMapChange;
WITH INFORMATION SYNTAX	IEEE802Dot3-MgmtAttributeModule.BitString;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) notification(10)pseMapChange(9)};
<b>bPSEMapChange</b>	<b>BEHAVIOUR</b>
DEFINED AS	See "BEHAVIOUR DEFINED AS" in 30.10.2.2.1;

## B.15 OMP entity formal definition

<b>oOMP</b>	<b>MANAGED OBJECT CLASS</b>
DERIVED FROM	'CCITT Rec. X.721 (1992)   ISO/IEC 10165-2:1992':top;

CHARACTERIZED BY

pOMPBasic	PACKAGE	
ATTRIBUTES	aOMPEmulationID	GET,
	aOMPEmulationType	GET,
	aSLDErrors	GET,
	aCRC8Errors	GET;

;

CONDITIONAL PACKAGES

pOMPOLTMonitor	PACKAGE	
ATTRIBUTES	aGoodLLID	GET,
	aONUPONcastLLID	GET,
	aOLTPONcastLLID	GET,
	aBadLLID	GET;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) package(4) oMPErrror(37)};

PRESENT IF This package is mandatory for a OLT and optional for a ONU.;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) managedObjectClass(3) ompObjectClass(19)};

#### **nbOMP-MACEntity NAME BINDING**

SUBORDINATE OBJECT CLASS oOMP;

NAMED BY SUPERIOR OBJECT CLASS oMACEntity;

WITH ATTRIBUTE aOMPEmulationID;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) omp-macEntity(36)};

### **B.15.1 OMP attributes**

#### **aOMPEmulationID ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;

MATCHES FOR EQUALITY, ORDERING;

BEHAVIOUR bOMPEmulationID;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) ompEmulationID(231)};

#### **bOMPEmulationID BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.3.7.1.1;

#### **aOMPEmulationType ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OMPEmulationType;

MATCHES FOR EQUALITY, ORDERING;

BEHAVIOUR bOMPEmulationType;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) ompEmulationType(232)};

#### **bOMPEmulationType BEHAVIOUR**

DEFINED AS See "BEHAVIOUR DEFINED AS" in 30.3.7.1.2;

**aSLDErrors****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) sldErrors(233)};

aCMCounter;  
EQUALITY, ORDERING;  
bSLDErrors;

**bSLDErrors****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.7.1.3;

**aCRC8Errors****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) crc8Errors(234)};

aCMCounter;  
EQUALITY, ORDERING;  
bCRC8Errors;

**bCRC8Errors****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.7.1.4;

**aGoodLLID****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) goodLLID(341)};

aCMCounter;  
EQUALITY, ORDERING;  
bGoodLLID;

**bGoodLLID****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.7.1.5;

**aONUPONcastLLID****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) onuPONcastLLID(342)};

aCMCounter;  
EQUALITY, ORDERING;  
bONUPONcastLLID;

**bONUPONcastLLID****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.7.1.6;

**aOLTPONcastLLID****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR

aCMCounter;  
EQUALITY, ORDERING;  
bOLTPONcastLLID;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oltPONcastLLID(343)};

**bOLTPONcastLLID****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.7.1.7;

**aBadLLID****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR

aCMCounter;  
EQUALITY, ORDERING;  
bBadLLID;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) badLLID(235)};

**bBadLLID****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.7.1.8;

**B.16 OAM entity managed object class****B.16.1 OAM entity formal definition****oOAM****MANAGED OBJECT CLASS**

DERIVED FROM 'CCITT Rec. X.721 (1992) | ISO/IEC 10165-2:1992':top;  
CHARACTERIZED BY

pOAMBasic

ATTRIBUTES

PACKAGE

aOAMID	GET,
aOAMAdminState	GET,
aOAMMode	GET-REPLACE,
aOAMDiscoveryState	GET,
aOAMRemoteMACAddress	GET,
aOAMLocalConfiguration	GET,
aOAMRemoteConfiguration	GET,
aOAMLocalPDUConfiguration	GET,
aOAMRemotePDUConfiguration	GET,
aOAMLocalFlagsField	GET,
aOAMRemoteFlagsField	GET,
aOAMLocalRevision	GET,
aOAMRemoteRevision	GET,
aOAMLocalState	GET,
aOAMRemoteState	GET,
aOAMRemoteVendorOUI	GET,
aOAMRemoteVendorSpecificInfo	GET,
aOAMUnsupportedCodesTx	GET,
aOAMUnsupportedCodesRx	GET,
aOAMInformationTx	GET,
aOAMInformationRx	GET,
aOAMUniqueEventNotificationTx	GET,
aOAMDuplicateEventNotificationTx	GET,
aOAMUniqueEventNotificationRx	GET,

```

aOAMDuplicateEventNotificationRx      GET,
aOAMLoopbackControlTx                 GET,
aOAMLoopbackControlRx                 GET,
aOAMVariableRequestTx                  GET,
aOAMVariableRequestRx                  GET,
aOAMVariableResponseTx                 GET,
aOAMVariableResponseRx                 GET,
aOAMOrganizationSpecificTx             GET,
aOAMOrganizationSpecificRx             GET,
aOAMLocalErrSymPeriodConfig            GET,
aOAMLocalErrSymPeriodEvent             GET,
aOAMLocalErrFrameConfig                GET,
aOAMLocalErrFrameEvent                 GET,
aOAMLocalErrFramePeriodConfig          GET,
aOAMLocalErrFramePeriodEvent           GET,
aOAMLocalErrFrameSecsSummaryConfig     GET,
aOAMLocalErrFrameSecsSummaryEvent      GET,
aOAMRemoteErrSymPeriodEvent            GET,
aOAMRemoteErrFrameEvent                GET,
aOAMRemoteErrFramePeriodEvent          GET,
aOAMRemoteErrFrameSecsSummaryEvent     GET,
aFramesLostDueToOAMError               GET;
ACTIONS
acOAMAdminControl;
;
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) managedObjectClass(3)
oamObjectClass(20)};

```

**nbOAM-aggregator****NAME BINDING**

```

SUBORDINATE OBJECT CLASS      oOAM;
NAMED BY SUPERIOR OBJECT CLASS oAggregator;
WITH ATTRIBUTE                  aOAMID;
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) oam-
aggregator(35)};

```

**B.16.2 OAM entity attributes****aOAMID****ATTRIBUTE**

```

WITH ATTRIBUTE SYNTAX      IEEE802Dot3-MgmtAttributeModule.OneOfName;
MATCHES FOR                 EQUALITY, ORDERING;
BEHAVIOUR                   bOAMID;
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamID(236)};

```

**bOAMID****BEHAVIOUR**

```

DEFINED AS      See "BEHAVIOUR DEFINED AS" in 30.3.6.1.1;

```

**aOAMAdminState****ATTRIBUTE**

```

WITH ATTRIBUTE SYNTAX      IEEE802Dot3-MgmtAttributeModule.PortAdminState;
MATCHES FOR                 EQUALITY, ORDERING;

```

BEHAVIOUR bOAMAdminState;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamAdmin-  
 State(237)};

**bOAMAdminState****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.6.1.2;

**aOAMMode****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMMode;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bOAMMode;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oam-  
 Mode(238)};

**bOAMMode****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.6.1.3;

**aOAMDiscoveryState****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMDiscoveryState;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bOAMDiscoveryState;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamDiscov-  
 eryState(333)};

**bOAMDiscoveryState****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.6.1.4;

**aOAMRemoteMACAddress****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.MACAddress;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bOAMRemoteMACAddress;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRe-  
 moteMACAddress(239)};

**bOAMRemoteMACAddress****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.6.1.5;

**aOAMLocalConfiguration****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OAMConfig;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bOAMLocalConfiguration;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalCon-  
 figuration(334)};

<b>bOAMLocalConfiguration</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.6;
<b>aOAMRemoteConfiguration</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.OAMConfig; EQUALITY, ORDERING; bOAMRemoteConfiguration; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRemote- Configuration(240)};
<b>bOAMRemoteConfiguration</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.7;
<b>aOAMLocalPDUConfiguration</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.Integer16; EQUALITY, ORDERING; bOAMLocalPDUConfiguration; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalP- DUConfiguration(335)};
<b>bOAMLocalPDUConfiguration</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.8;
<b>aOAMRemotePDUConfiguration</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.Integer16; EQUALITY, ORDERING; bOAMRemotePDUConfiguration; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRemoteP- DUConfiguration(241)};
<b>bOAMRemotePDUConfiguration</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.9;
<b>aOAMLocalFlagsField</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.OAMFlagsField; EQUALITY, ORDERING; bOAMLocalFlagsField; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocal- FlagsField(242)};
<b>bOAMLocalFlagsField</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.10;

<b>aOAMRemoteFlagsField</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.OAMFlagsField; EQUALITY, ORDERING; bOAMRemoteFlagsField; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRemoteFlagsField(243)};
<b>bOAMRemoteFlagsField</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.11;
<b>aOAMLocalRevision</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.Integer16; EQUALITY, ORDERING; bOAMLocalRevision; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalRevision(336)};
<b>bOAMLocalRevision</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.12;
<b>aOAMRemoteRevision</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.Integer16; EQUALITY, ORDERING; bOAMRemoteRevision; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRemoteRevision(244)};
<b>bOAMRemoteRevision</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.13;
<b>aOAMLocalState</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.OAMState; EQUALITY, ORDERING; bOAMLocalState; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalState(337)};
<b>bOAMLocalState</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.14;
<b>aOAMRemoteState</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR	IEEE802Dot3-MgmtAttributeModule.OAMState; EQUALITY, ORDERING; bOAMRemoteState;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRemoteState(245)};

**bOAMRemoteState****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.6.1.15;

**aOAMRemoteVendorOUI****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX  
MATCHES FOR  
BEHAVIOUR

IEEE802Dot3-MgmtAttributeModule.OUI;  
EQUALITY, ORDERING;  
bOAMRemoteVendorOUI;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRemoteVendorOUI(246)};

**bOAMRemoteVendorOUI****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.6.1.16;

**aOAMRemoteVendorSpecificInfo****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX  
MATCHES FOR  
BEHAVIOUR

IEEE802Dot3-MgmtAttributeModule.Integer32;  
EQUALITY, ORDERING;  
bOamRemoteVendorSpecificInfo;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRemoteVendorSpecificInfo(247)};

**bOamRemoteVendorSpecificInfo BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.6.1.17;

**aOAMUnsupportedCodesTx****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR

aCMCounter;  
EQUALITY, ORDERING;  
bOAMUnsupportedCodesTx;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamUnsupportedCodesTx(338)};

**bOAMUnsupportedCodesTx****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.6.1.18;

**aOAMUnsupportedCodesRx****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR

aCMCounter;  
EQUALITY, ORDERING;  
bOAMUnsupportedCodesRx;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamUnsupportedCodesRx(250)};

**bOAMUnsupportedCodesRx****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.3.6.1.19;

<b>aOAMInformationTx</b>	<b>ATTRIBUTE</b>
DERIVED FROM MATCHES FOR BEHAVIOUR REGISTERED AS	aCMCounter; EQUALITY, ORDERING; bOAMInformationTx; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamInformationTx(251)};
<b>bOAMInformationTx</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.20;
<b>aOAMInformationRx</b>	<b>ATTRIBUTE</b>
DERIVED FROM MATCHES FOR BEHAVIOUR REGISTERED AS	aCMCounter; EQUALITY, ORDERING; bOAMInformationRx; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamInformationRx(252)};
<b>bOAMInformationRx</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.21;
<b>aOAMUniqueEventNotificationTx</b>	<b>ATTRIBUTE</b>
DERIVED FROM MATCHES FOR BEHAVIOUR REGISTERED AS	aCMCounter; EQUALITY, ORDERING; bOAMUniqueEventNotificationTx; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamUniqueEventNotificationTx(339)};
<b>bOAMUniqueEventNotificationTx</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.22;
<b>aOAMDuplicateEventNotificationTx</b>	<b>ATTRIBUTE</b>
DERIVED FROM MATCHES FOR BEHAVIOUR REGISTERED AS	aCMCounter; EQUALITY, ORDERING; bOAMDuplicateEventNotificationTx; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamDuplicateEventNotificationTx(340)};
<b>bOAMDuplicateEventNotificationTx</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.23;
<b>aOAMUniqueEventNotificationRx</b>	<b>ATTRIBUTE</b>
DERIVED FROM MATCHES FOR BEHAVIOUR	aCMCounter; EQUALITY, ORDERING; bOAMUniqueEventNotificationRx;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamUniqueEventNotificationRx(254)};

**bOAMUniqueEventNotificationRx**      **BEHAVIOUR**

DEFINED AS      See “BEHAVIOUR DEFINED AS” in 30.3.6.1.24;

**aOAMDuplicateEventNotificationRx**      **ATTRIBUTE**

DERIVED FROM      aCMCounter;  
 MATCHES FOR      EQUALITY, ORDERING;  
 BEHAVIOUR      bOAMDuplicateEventNotificationRx;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamDuplicateEventNotificationRx(255)};

**bOAMDuplicateEventNotificationRx**      **BEHAVIOUR**

DEFINED AS      See “BEHAVIOUR DEFINED AS” in 30.3.6.1.25;

**aOAMLoopbackControlTx**      **ATTRIBUTE**

DERIVED FROM      aCMCounter;  
 MATCHES FOR      EQUALITY, ORDERING;  
 BEHAVIOUR      bOAMLoopbackControlTx;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLoopbackControlTx(256)};

**bOAMLoopbackControlTx**      **BEHAVIOUR**

DEFINED AS      See “BEHAVIOUR DEFINED AS” in 30.3.6.1.26;

**aOAMLoopbackControlRx**      **ATTRIBUTE**

DERIVED FROM      aCMCounter;  
 MATCHES FOR      EQUALITY, ORDERING;  
 BEHAVIOUR      bOAMLoopbackControlRx;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLoopbackControlRx(257)};

**bOAMLoopbackControlRx**      **BEHAVIOUR**

DEFINED AS      See “BEHAVIOUR DEFINED AS” in 30.3.6.1.27;

**aOAMVariableRequestTx**      **ATTRIBUTE**

DERIVED FROM      aCMCounter;  
 MATCHES FOR      EQUALITY, ORDERING;  
 BEHAVIOUR      bOAMVariableRequestTx;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamVariableRequestTx(258)};

**bOAMVariableRequestTx**      **BEHAVIOUR**

DEFINED AS      See “BEHAVIOUR DEFINED AS” in 30.3.6.1.28;

<b>aOAMVariableRequestRx</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMVariableRequestRx;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamVariableRequestRx(259)};
<b>bOAMVariableRequestRx</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.29;
<b>aOAMVariableResponseTx</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMVariableResponseTx;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamVariableResponseTx(260)};
<b>bOAMVariableResponseTx</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.30;
<b>aOAMVariableResponseRx</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMVariableResponseRx;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamVariableResponseRx(261)};
<b>bOAMVariableResponseRx</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.31;
<b>aOAMOrganizationSpecificTx</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMOrganizationSpecificTx;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamOrganizationSpecificTx(262)};
<b>bOAMOrganizationSpecificTx</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.32;
<b>aOAMOrganizationSpecificRx</b>	<b>ATTRIBUTE</b>
DERIVED FROM	aCMCounter;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMOrganizationSpecificRx;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamOrganizationSpecificRx(263)};

**bOAMOrganizationSpecificRx**                      **BEHAVIOUR**

DEFINED AS    See “BEHAVIOUR DEFINED AS” in 30.3.6.1.33;

**aOAMLocalErrSymPeriodConfig**                      **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX                              IEEE802Dot3-MgmtAttributeModule.OAMErrorConf;  
MATCHES FOR    EQUALITY, ORDERING;  
BEHAVIOUR    bOAMLocalErrSymPeriodConfig;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalErrSymPeriodConfig(264)};

**bOAMLocalErrSymPeriodConfig**                      **BEHAVIOUR**

DEFINED AS    See “BEHAVIOUR DEFINED AS” in 30.3.6.1.34;

**aOAMLocalErrSymPeriodEvent**                      **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX                              IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;  
MATCHES FOR    EQUALITY, ORDERING;  
BEHAVIOUR    bOAMLocalErrSymPeriodEvent;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalErrSymPeriodEvent(265)};

**bOAMLocalErrSymPeriodEvent**                      **BEHAVIOUR**

DEFINED AS    See “BEHAVIOUR DEFINED AS” in 30.3.6.1.35;

**aOAMLocalErrFrameConfig**                              **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX                              IEEE802Dot3-MgmtAttributeModule.OAMErrorConf;  
MATCHES FOR    EQUALITY, ORDERING;  
BEHAVIOUR    bOAMLocalErrFrameConfig;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalErrFrameConfig(266)};

**bOAMLocalErrFrameConfig**                              **BEHAVIOUR**

DEFINED AS    See “BEHAVIOUR DEFINED AS” in 30.3.6.1.36;

**aOAMLocalErrFrameEvent**                              **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX                              IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;  
MATCHES FOR    EQUALITY, ORDERING;  
BEHAVIOUR    bOAMLocalErrFrameEvent;  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalErrFrameEvent(267)};

**bOAMLocalErrFrameEvent**                              **BEHAVIOUR**

DEFINED AS    See “BEHAVIOUR DEFINED AS” in 30.3.6.1.37;

<b>aOAMLocalErrFramePeriodConfig</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.OAMErrorConf;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMLocalErrFramePeriodConfig;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalErrFramePeriodConfig(268)};
<b>bOAMLocalErrFramePeriodConfig</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.38;
<b>aOAMLocalErrFramePeriodEvent</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMLocalErrFramePeriodEvent;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalErrFramePeriodEvent(269)};
<b>bOAMLocalErrFramePeriodEvent</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.39;
<b>aOAMLocalErrFrameSecsSummaryConfig</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.OAMErrorConf;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMLocalErrFrameSecsSummaryConfig;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalErrFrameSecsSummaryConfig(270)};
<b>bOAMLocalErrFrameSecsSummaryConfig</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.40;
<b>aOAMLocalErrFrameSecsSummaryEvent</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMLocalErrFrameSecsSummaryEvent;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamLocalErrFrameSecsSummaryEvent(271)};
<b>bOAMLocalErrFrameSecsSummaryEvent</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.3.6.1.41;
<b>aOAMRemoteErrSymPeriodEvent</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bOAMRemoteErrSymPeriodEvent;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRemoteErrSymPeriodEvent(272)};

**bOAMRemoteErrSymPeriodEvent**      **BEHAVIOUR**

DEFINED AS      See “BEHAVIOUR DEFINED AS” in 30.3.6.1.42;

**aOAMRemoteErrFrameEvent**      **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX      IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;  
 MATCHES FOR      EQUALITY, ORDERING;  
 BEHAVIOUR      bOAMRemoteErrFrameEvent;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRemoteErrFrameEvent(273)};

**bOAMRemoteErrFrameEvent**      **BEHAVIOUR**

DEFINED AS      See “BEHAVIOUR DEFINED AS” in 30.3.6.1.43;

**aOAMRemoteErrFramePeriodEvent**      **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX      IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;  
 MATCHES FOR      EQUALITY, ORDERING;  
 BEHAVIOUR      bOAMRemoteErrFramePeriodEvent;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRemoteErrFramePeriodEvent(274)};

**bOAMRemoteErrFramePeriodEvent**      **BEHAVIOUR**

DEFINED AS      See “BEHAVIOUR DEFINED AS” in 30.3.6.1.44;

**aOAMRemoteErrFrameSecsSummaryEvent**      **ATTRIBUTE**

WITH ATTRIBUTE SYNTAX      IEEE802Dot3-MgmtAttributeModule.OAMErrorEvent;  
 MATCHES FOR      EQUALITY, ORDERING;  
 BEHAVIOUR      bOAMRemoteErrFrameSecsSummaryEvent;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) oamRemoteErrFrameSecsSummaryEvent(275)};

**bOAMRemoteErrFrameSecsSummaryEvent**      **BEHAVIOUR**

DEFINED AS      See “BEHAVIOUR DEFINED AS” in 30.3.6.1.45;

**aFramesLostDueToOAMError**      **ATTRIBUTE**

DERIVED FROM      aCMCounter;  
 MATCHES FOR      EQUALITY, ORDERING;  
 BEHAVIOUR      bFramesLostDueToOAMError;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) framesLostDueToOAMError(276)};

**bFramesLostDueToOAMError**      **BEHAVIOUR**

DEFINED AS      See “BEHAVIOUR DEFINED AS” in 30.3.6.1.46;



<b>aPAFID</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.OneOfName; EQUALITY, ORDERING; bPAFID; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pafID(344)};
<b>bPAFID</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.11.1.1.1;
<b>aPhyEnd</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.PHYEnd; EQUALITY, ORDERING; bPhyEnd; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) phyEnd(326)};
<b>bPhyEnd</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.11.1.1.2;
<b>aPHYCurrentStatus</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.PHYCurrentState; EQUALITY, ORDERING; bPHYCurrentStatus; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) phyCurrent- Status(296)};
<b>bPHYCurrentStatus</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.11.1.1.3;
<b>aPAFSupported</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.TrueFalse; EQUALITY, ORDERING; bPAFSupported; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pAFSup- ported(304)};
<b>bPAFSupported</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.11.1.1.4;
<b>aPAFAdminState</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.PortAdminState; EQUALITY, ORDERING; bPAFAdminState; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pAFAdmin- State(305)};

<b>bPAFAdminState</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.11.1.1.5;
<b>aLocalPAFCapacity</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.Integer8; EQUALITY, ORDERING; bLocalPAFCapacity; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) localPAFCapacity(327)};
<b>bLocalPAFCapacity</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.11.1.1.6;
<b>aLocalPMEAvailable</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.Integer32; EQUALITY, ORDERING; bLocalPMEAvailable; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) localPMEAvailable(306)};
<b>bLocalPMEAvailable</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.11.1.1.7;
<b>aLocalPMEAggregate</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.Integer32; EQUALITY, ORDERING; bLocalPMEAggregate; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) localPMEAggregate(307)};
<b>bLocalPMEAggregate</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.11.1.1.8;
<b>aRemotePAFSupported</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX MATCHES FOR BEHAVIOUR REGISTERED AS	IEEE802Dot3-MgmtAttributeModule.TrueFalse; EQUALITY, ORDERING; bRemotePAFSupported; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) remotePAFSupported(328)};
<b>bRemotePAFSupported</b>	<b>BEHAVIOUR</b>
DEFINED AS	See “BEHAVIOUR DEFINED AS” in 30.11.1.1.9;

<b>aRemotePAFCapacity</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.Integer8;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bRemotePAFCapacity;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) remotePAFCapacity(329)};
<b>bRemotePAFCapacity</b>	<b>BEHAVIOUR</b>
DEFINED AS	See "BEHAVIOUR DEFINED AS" in 30.11.1.1.10;
<b>aRemotePMEAggregate</b>	<b>ATTRIBUTE</b>
WITH ATTRIBUTE SYNTAX	IEEE802Dot3-MgmtAttributeModule.Integer32;
MATCHES FOR	EQUALITY, ORDERING;
BEHAVIOUR	bRemotePMEAggregate;
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) remotePMEAggregate(310)};
<b>bRemotePMEAggregate</b>	<b>BEHAVIOUR</b>
DEFINED AS	See "BEHAVIOUR DEFINED AS" in 30.11.1.1.11;

## B.18 PME managed object class

### B.18.1 PME formal definition

<b>oPME</b>	<b>MANAGED OBJECT CLASS</b>	
DERIVED FROM	'CCITT Rec. X.721 (1992)   ISO/IEC 10165-2:1992':top;	
CHARACTERIZED BY		
pPMEBasic	PACKAGE	
ATTRIBUTES	aPMEID	GET,
	aPMEAdminState	GET-REPLACE,
	aPMEStatus	GET,
	aPMESNRMgn	GET,
	aTCCodingViolations	GET,
	aProfileSelect	GET-REPLACE,
	aOperatingProfile	GET,
	aPMEFECCorrectedBlocks	GET,
	aPMEFECCorrectableBlocks	GET,
	aTCCRCErrors	GET;
;		
REGISTERED AS	{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) managedObjectClass(3) pmeObjectClass(25)};	

### **nbPME-PAF** **NAME BINDING**

SUBORDINATE OBJECT CLASS      oPME;  
NAMED BY SUPERIOR OBJECT CLASS      oPAF;

WITH ATTRIBUTE aPAFID;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) nameBinding(6) pme-paf(40)};

**aPMEID****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.OneOfName;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bPMEID;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pmeID(330)};

**bPMEID****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.1;

**aPMEAdminState****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PortAdminState;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bPMEAdminState;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pmeAdmin-State(345)};

**bPMEAdminState****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.2;

**aPMEStatus****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.PMEStatus;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bPMEStatus;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pmeStatus(346)};

**bPMEStatus****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.3;

**aPMESNRMgn****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX IEEE802Dot3-MgmtAttributeModule.Integer8;  
 MATCHES FOR EQUALITY, ORDERING;  
 BEHAVIOUR bPMESNRMgn;  
 REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pmeSN-RMgn(331)};

**bPMESNRMgn****BEHAVIOUR**

DEFINED AS See “BEHAVIOUR DEFINED AS” in 30.11.2.1.4;

**aTCCodingViolations****ATTRIBUTE**

DERIVED FROM aCMCounter;

MATCHES FOR  
BEHAVIOUR  
REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) tcCodingViolations(332)};

EQUALITY, ORDERING;  
bTCCodingViolations;

**bTCCodingViolations****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.11.2.1.5;

**aProfileSelect****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX  
MATCHES FOR  
BEHAVIOUR

IEEE802Dot3-MgmtAttributeModule.PMEProfile;  
EQUALITY, ORDERING;  
bProfileSelect;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) profileSelect(347)};

**bProfileSelect****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.11.2.1.6;

**aOperatingProfile****ATTRIBUTE**

WITH ATTRIBUTE SYNTAX  
MATCHES FOR  
BEHAVIOUR

IEEE802Dot3-MgmtAttributeModule.PMEOperatingProfile;  
EQUALITY, ORDERING;  
bOperatingProfile;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) operatingProfile(348)};

**bOperatingProfile****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.11.2.1.7;

**aPMEFECCorrectedBlocks****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR

aCMCounter;  
EQUALITY, ORDERING;  
bPMEFECCorrectedBlocks;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pmeFECCorrectedBlocks(349)};

**bPMEFECCorrectedBlocks****BEHAVIOUR**

DEFINED AS

See “BEHAVIOUR DEFINED AS” in 30.11.2.1.8;

**aPMEFECUncorrectableBlocks****ATTRIBUTE**

DERIVED FROM  
MATCHES FOR  
BEHAVIOUR

aCMCounter;  
EQUALITY, ORDERING;  
bPMEFECUncorrectableBlocks;

REGISTERED AS {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) pmeFECUncorrectableBlocks(350)};

**bPMEFECUncorrectableBlocks**

DEFINED AS

**BEHAVIOUR**

See “BEHAVIOUR DEFINED AS” in 30.11.2.1.9;

**aTCCRCErrors**DERIVED FROM  
MATCHES FOR  
BEHAVIOUR  
REGISTERED AS

{iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) tcCRCErrors(352)};

**ATTRIBUTE**aCMCounter;  
EQUALITY, ORDERING;  
bTCCRCErrors;**bTCCRCErrors**

DEFINED AS

**BEHAVIOUR**

See “BEHAVIOUR DEFINED AS” in 30.11.2.1.10;

## Annex C

(normative)

### GDMO and ASN.1 definitions for management

#### C.1 Common attributes template

This template defines generic facilities that are used in the standard.

<b>aCMCounter</b>	<b>ATTRIBUTE</b>
DERIVED FROM BEHAVIOUR REGISTERED AS	“ISO/IEC 10165-5”:genericWrappingCounter; bCMCounter; {iso(1) std(0) iso8802(8802) csma(3) csmacdmgt(30) attribute(7) cmCounter(88)};
<b>bCMCounter</b>	<b>BEHAVIOUR</b>
DEFINED AS	Wraps at one of two sizes. Size is conditional. Wraps at 32 bits, that is this counter reaches its maximum value at $2^{32}-1$ (i.e., approximately $4.294 \times 10^9$ ) and then rolls over to zero on the next increment, if maximum increment rate from zero causes a rollover in 58 min or more. Wraps at 64 bits, that is this counter reaches its maximum value at $2^{64}-1$ (i.e., approximately $1.844 \times 10^{19}$ ) and then rolls over to zero on the next increment, if maximum increment rate from zero would cause a 32 bit counter to roll over in less than 58 min. The counter that this is derived from initializes to zero. Initialization to zero is not a requirement of this standard;

#### C.2 ASN.1 module for CSMA/CD managed objects

This ASN.1 module defines the ASN.1 types and subtypes that are referred to immediately after the WITH ATTRIBUTE SYNTAX construct in this clause uses of the attribute template defined in ISO/IEC 10165-4:1992 [B37].

```
IEEE802Dot3-MgmtAttributeModule {iso(1) std(0) iso8802(8802) csma(3) global(1) asn1Module(2)
commonDefinitions(0) version(2)} DEFINITIONS IMPLICIT TAGS ::= BEGIN
```

```
EXPORTS--everything
```

```
IMPORTS--implicitly imports ISO 8824:1990
```

```
MACAddress
FROM IEEE802CommonDefinitions
{iso(1) member-body(2) us(840) ieee802dot1partF(10011)
asn1Module(2) commonDefinitions(0) version1(0)};
```

```
AdminState ::= ENUMERATED {
```

```

    other           (1),    --undefined
    unknown         (2),    --initializing, true state not yet known
    operational     (3),    --powered and connected
    standby         (4),    --inactive but on
    shutdown        (5)     --similar to power down
  }

```

AggDataRate ::= INTEGER (0..2<sup>32</sup>-1)--The data rate of an Aggregation

AggID ::= INTEGER (0..2<sup>32</sup>-1)

AggOrInd ::= BOOLEAN

AggPortID ::= INTEGER (0..2<sup>32</sup>-1)

AggPortList ::= SEQUENCE OF AggPortID

AggPortState ::= BIT STRING (SIZE (1..8))

```

AggState ::= ENUMERATED {
  up           (0),    --operational
  down        (1)     --disabled
}

```

AttemptArray ::= SEQUENCE OF aCMCounter--array [1..attempt limit - 1]

```

AutoNegAdminState ::= ENUMERATED {
  disabled     (1),
  enabled      (2)
}

```

```

AutoNegAutoConfig ::= ENUMERATED {
  other           (1),
  configuring     (2),
  complete        (3),
  disabled        (4),
  parallel detect fail (5)
}

```

```

AutoNegRemoteSignalingDetect ::= ENUMERATED {
  detected       (1),
  notdetected    (2)
}

```

```

AutoNegSelector ::= ENUMERATED {

```

```

other          (1),    --undefined
ethernet       (2),    --802.3
isoethernet    (3)     --802.9
}

```

AutoNegSelectorList ::= SEQUENCE OF AutoNegSelector

AutoNegTechnology ::= ENUMERATED {

```

global          (0),    --reserved for future use
other          (1),    --undefined
unknown        (2),    --initializing, true ability not yet know.
10BASE-T       (14),   --10BASE-T as defined in Clause 14
10BASE-TFD     (142),  --Full duplex 10BASE-T as defined in Clauses 14 and 31
100BASE-T4     (23),   --100BASE-T4 as defined in Clause 23
100BASE-TX     (25),   --100BASE-TX as defined in Clause 25
100BASE-TXFD   (252),  --Full duplex 100BASE-TX as defined in Clauses 25 and 31
10GBASE-KX4    (483),  --10GBASE-KX4 PHY as defined in Clause 71
10GBASE-KR     (495),  --10GBASE-KR PHY as defined in Clause 72
10GBASE-T      (55),   --10GBASE-T PHY as defined in Clause 55
FDX PAUSE      (312),  --PAUSE operation for full duplex links as defined in
Annex 31B
FDX APAUSE     (313),  --Asymmetric PAUSE operation for full duplex links as defined
in Clause 37 and Annex 31B
FDX SPAUSE     (314),  --Symmetric PAUSE operation for full duplex links as defined
in Clause 37 and Annex 31B
FDX BPAUSE     (315),  --Asymmetric and Symmetric PAUSE operation for full duplex
links as defined in Clause 37 and Annex 31B
100BASE-T2     (32),   --100BASE-T2 as defined in Clause 32
100BASE-T2FD   (322),  --Full duplex 100BASE-T2 as defined in Clauses 31 and 32
1000BASE-X     (36),   --1000BASE-X as defined in Clause 36
1000BASE-XFD   (362),  --Full duplex 1000BASE-X as defined in Clause 36
1000BASE-KX    (393),  --1000BASE-KX PHY as defined in Clause 70
1000BASE-T     (40),   --1000BASE-T PHY as defined in Clause 40
1000BASE-TFD   (402),  --Full duplex 1000BASE-T PHY as defined in Clause 40
Rem Fault1     (37),   --Remote fault bit 1 (RF1) as specified in Clause 37
Rem Fault2     (372),  --Remote fault bit 2 (RF1) as specified in Clause 37
isoethernet    (8029)  --802.9 ISLAN-16T
}

```

AutoNegTechnologyList ::= SEQUENCE OF AutoNegTechnology

AutoPartitionState ::= ENUMERATED {

```

autoPartitioned (1),
notAutoPartitioned (2)
}

```

BbandFrequency ::= SEQUENCE {

```

xmitCarrierFrequency [1] INTEGER --Frequency in MHz times 4 (250 kHz resolution)
translationFrequency [2] INTEGER --Frequency in MHz times 4 (250 kHz resolution)
}

```

```

BbandXmitRcvSplitType ::= ENUMERATED {
    other          (1),    --undefined
    single         (2),    --single-cable system
    dual           (3)     --dual-cable system, offset normally zero
}

BitString ::= BIT STRING (SIZE (1..1024))

ChurnState ::= ENUMERATED {
    noChurn        (0),    --NO_ACTOR/PARTNER_CHURN
                       --or ACTOR/PARTNER_CHURN_MONITOR
    churn          (1)     --ACTOR/PARTNER_CHURN
}

CollectorMaxDelay ::= INTEGER    --16 bit value, tens of microseconds
                               --(max = 0.65535 seconds)

CurrentStatus ::= ENUMERATED {
    MPSAbsent      (0),    -- MPS absent
    ok             (1)     -- MPS present and over current not detected
}

DeferControl ::= ENUMERATED {
    unknown        (1),    --defer control mode unknown
    defer control off (2),  --defer control mode disabled
    defer control on  (3)   --defer control mode enabled
}

DescriptionString ::= PrintableString (SIZE 0..255)

DetectStatus ::= ENUMERATED {
    disabled       (0),    -- PSE disabled
    searching      (1),    -- PSE searching
    deliveringPower (2),   -- PSE delivering power
    test           (3),    -- PSE test mode
    fault          (4),    -- PSE fault detected
    otherFault     (5)     -- PSE implementation specific fault detected
}

DuplexValues ::= ENUMERATED {
    half duplex    (1),    --capable of operating in half duplex mode
    full duplex    (2),    --capable of operating in full duplex mode
    unknown        (3)     --unknown duplex capability
}

FarEndPathStatus ::= BIT STRING (SIZE (2))

```

```

FECMode ::= ENUMERATED {
    unknown          (1),    --initializing, true state not yet known
    supported        (2),    --FEC supported
    not supported    (3),    --FEC not supported
}

```

```

Integer8 ::= INTEGER (0..2^8-1)    --8 bit value

```

```

Integer16 ::= INTEGER (0..2^16-1)  --16 bit value

```

```

Integer32 ::= INTEGER (0..2^32-1)  --32 bit value

```

```

Integer48 ::= INTEGER (0..2^48-1)  --48 bit value

```

```

Integer64 ::= INTEGER (0..2^64-1)  --64 bit value

```

```

Jabber ::= SEQUENCE {
    jabberFlag        [1]    JabberFlag,
    jabberCounter     [2]    JabberCounter
}

```

```

JabberFlag ::= ENUMERATED {
    other          (1),    --undefined
    unknown        (2),    --initializing, true state not yet known
    normal         (3),    --state is true or normal
    fault          (4),    --state is false, fault or abnormal
}

```

```

JabberCounter ::= INTEGER (0..2^32- 1)

```

```

JValue ::= OCTET STRING (SIZE (16))

```

```

KeyValue ::= INTEGER (0..2^16-1)    --16 bit value; range 0-65535

```

```

LACPActivity ::= ENUMERATED {
    active          (0),    --Port is Active LACP
    passive         (1),    --Port is Passive LACP
}

```

```

LACPTimeout ::= ENUMERATED {
    short           (0),    --Timeouts are Short
    long            (1),    --Timeouts are Long
}

```

}

LineStatus ::= BIT STRING (SIZE (2))

LinkDelayAllowance ::= INTEGER (0..2<sup>32</sup> - 1)

MACControlFunctions ::= ENUMERATED {  
     PAUSE                    (312)    --PAUSE command implemented  
 }

MACControlFunctionsList ::= SEQUENCE OF MACControlFunctions

MACCapabilitiesList ::= SEQUENCE OF DuplexValues

MauTypeList ::= SEQUENCE OF TypeValue

MaxFrameLengthList ::= ENUMERATED {  
     unknown                  (1),    --Frame length capability unknown  
     basicFrame              (2),    --Capable of supporting maxBasicFrameSize  
                               (1518 octet frames)  
     qTaggedFrame            (3),    --Capable of supporting maxBasicFrameSize + qTagPrefixSize  
                               (1522 octet frames)  
     envelopeFrame           (4)    --Capable of supporting maxEnvelopeFrameSize  
                               (2000 octet frames)  
 }

MediaAvailState ::= ENUMERATED {  
     other                    (1),    --undefined  
     unknown                  (2),    --initializing, true state not yet known  
     available                (3),    --link or light normal, loopback normal  
     not available            (4),    --link loss or low light, no loopback  
     remote fault             (5),    --remote fault with no detail  
     invalid signal           (6),    --invalid signal, applies only to 10BASE-FB  
     remote jabber            (7),    --remote fault, reason known to be jabber  
     remote link loss        (8),    --remote fault, reason known to be far-end link loss  
     remote test              (9),    --remote fault, reason known to be test  
     offline                  (10),  --offline, applies only to Clause 37 Auto-Negotiation  
     auto neg error           (11)   --Auto-Negotiation error, applies only to Clause 37 Auto-  
                               Negotiation  
     PMD link fault           (12)   --PMD/PMD receive link fault  
     WIS frame loss           (13)   --WIS loss of frame, applies only to 10GBASE-W  
     WIS signal loss          (14)   --WIS loss of signal, applies only to 10GBASE-W  
     PCS link fault           (15)   --PCS receive link fault  
     excessive BER           (16)   --PCS Bit Error Ratio monitor reporting excessive error ratio  
     DXS link fault           (17)   --DTE XS receive link fault, applies only to XAUI  
     PXS link fault           (18)   --PHY XS transmit link fault, applies only to XAUI  
 }

```

MIIDetect ::= ENUMERATED {
    unknown          (1),
    presentNothingConnected(2),
    presentConnected (3),
    absent           (4)
}

```

```

MPCPMode ::= ENUMERATED {
    OLT          (1),  --sublayer operating in OLT mode
    ONU         (2),  --sublayer operating in ONU mode
}

```

```

MPCPRegState ::= ENUMERATED {
    unregistered (1),  --unregistered
    registering  (2),  --registering
    registered   (3),  --registered
}

```

MulticastAddressList ::= SEQUENCE OF MACAddress

```

MuxState ::= ENUMERATED {
    detached          (0),  --DETACHED
    waiting           (1),  --WAITING
    attached          (2),  --ATTACHED
    collecting         (3),  --COLLECTING
    distributing      (4),  --DISTRIBUTING
    collecting_distributing (5)  --COLLECTING_DISTRIBUTING
}

```

```

NotificationEnable ::= ENUMERATED {
    enabled          (0),  --Notifications enabled
    disabled         (1),  --Notifications disabled
}

```

OAMConfig ::= BIT STRING (SIZE (5))

```

OAMDiscoveryState ::= ENUMERATED {
    link fault          (1),
    active send local   (2),
    passive wait        (3),
    send local remote   (4),
    send any             (5),
    send local remote ok (6)
}

```

OAMErrorConf ::= SEQUENCE {

```

    OAMEventWindow [1] Integer64,
    OAMEventThreshold [2] Integer64
  }

```

```

OAMErrorEvent ::= SEQUENCE {
    OAMEventTimeStamp [1] Integer16,
    OAMEventWindow [2] Integer64,
    OAMEventThreshold [3] Integer64,
    OAMErrors [4] Integer64,
    OAMErrorRunTotal [5] Integer64,
    OAMEventRunTotal [6] Integer32
}

```

OAMFlagsField ::= BIT STRING (SIZE (7))

```

OAMMode ::= ENUMERATED {
    passive (1), --passive
    active (2) --active
}

```

OAMState ::= BIT STRING (SIZE (3))

```

OMPEmulationType ::= ENUMERATED {
    unknown (1), --Initializing, true state or type not yet known
    OLT (2), --Sublayer operating in OLT mode
    ONU (3) --Sublayer operating in ONU mode
}

```

OneOfName ::= INTEGER (1..1024)

OUI ::= OCTETSTRING -- Length 3 octets

PairCtrlAbility ::= BOOLEAN

PathStatus ::= BIT STRING (SIZE (4))

```

PHYCurrentState ::= ENUMERATED {
    noPMEAssigned (1), --no PME assigned in case of PME aggregation
    lossOfFraming (2), --one or more PME in aggregation indicates Loss of Framing
    lossOfSignal (3), --one or more PME in aggregation indicates Loss of Signal
    lossOfPower (4), --one or more PME in aggregation indicates Loss of Power,
    10PASS-TS only
    configInitFailure (5), --configuration initialization failure
    noPeerPMEPresent (6), --one or more PME in aggregation indicates no peer PME
    present
}

```

```

snrMarginViolation      (7),    --one or more PME in aggregation indicates SNR Margin
                             Violation
lineAttenViolation      (8)     --one or more PME in aggregation indicates Loop Attenuation
                             Violation
}

```

```

PHYEnd ::= ENUMERATED {
  subscriber             (1),    --Subscriber mode of operation
  office                 (2)     --Office mode of operation
}

```

PhyTypeList ::= SEQUENCE OF PhyTypeValue

```

PhyTypeValue ::= ENUMERATED {
  other                  (1),    --undefined
  unknown                (2),    --initializing, true state or type not yet known
  none                  (3),    --MII present and nothing connected
  10 Mb/s                (7),    --Clause 7 10 Mb/s Manchester
  100BASE-T4             (23),   --Clause 23 100 Mb/s 8B/6T
  100BASE-X              (24),   --Clause 24 100 Mb/s 4B/5B
  100BASE-T2             (32),   --Clause 32 100 Mb/s PAM5x5
  1000BASE-X             (36),   --Clause 36 1000 Mb/s 8B/10B
  1000BASE-T             (40),   --Clause 40 1000 Mb/s 4D-PAM5
  10GBASE-X              (48),   --Clause 48 10 Gb/s 4
  10GBASE-R              (49),   --Clause 49 10 Gb/s 64B/66B
  10GBASE-W              (50),   --Clause 49 10 Gb/s 64B/66B and Clause 50 WIS
  10GBASE-T              (55),   --Clause 55 10 Gb/s DSQ128
  10PASS-TS              (62),   --Clause 61 2.5 Mb/s to 100 Mb/s 64/65-octet
  2BASE-TL               (63),   --Clause 61 0.5 Mb/s to 5.5 Mb/s 64/65-octet
}

```

```

PMEOperatingProfile ::= SEQUENCE {
  PMEProfileState       [1]     PMEProfileState,
  PMEProfileNumber      [2]     Integer8
}

```

```

PMEProfile ::= SEQUENCE {
  profile1               [1]     Integer8,
  profile2               [2]     Integer8,
  profile3               [3]     Integer8,
  profile4               [4]     Integer8,
  profile4               [5]     Integer8,
  profile4               [6]     Integer8
}

```

```

PMEProfileState ::= ENUMERATED {
  no link                (1),    --link is not up
  match                  (2),    --link up using a profile
}

```

```

no match          (3),  --link up not using a profile
activate failure  (4)  --link activate failure
}

```

```

PMESStatus ::= ENUMERATED {
  down not ready  (1),  --link is down, not ready
  down ready      (2),  --link is down, ready
  initializing     (3),  --link is initializing
  10PASS-TS      (4),  --link is up as 10PASS-TS
  2BASE-TL       (5)  --link is up as 2BASE-TL
}

```

```

PortAdminState ::= ENUMERATED {
  disabled        (1),
  enabled         (2)
}

```

PortNumber ::= INTEGER (0..2<sup>16</sup>-1)

```

PowerClass ::= ENUMERATED {
  class0          (0),  -- Class 0 PD
  class1          (1),  -- Class 1 PD
  class2          (2),  -- Class 2 PD
  class3          (3),  -- Class 3 PD
  class4          (4)  -- Class 4 PD
}

```

PriorityValue ::= INTEGER (0..2<sup>16</sup>-1) --16 bits

```

PSEPowerPairs ::= ENUMERATED {
  signal          (0),  -- PSE Pinout Alternative A
  spare           (1)  -- PSE Pinout Alternative B
}

```

```

RateValues ::= ENUMERATED {
  rate control off (1),  -- rate control enabled
  rate control on  (2),  -- rate control disabled
  unknown          (3)  -- rate control mode unknown
}

```

RegisterEight ::= INTEGER (0..255)

RepeaterHealthData ::= OCTET STRING (SIZE (0..255))

RepeaterHealthInfo ::= SEQUENCE {

```

repeaterHealthState      [1]    RepeaterHealthState,
repeaterHealthText      [2]    RepeaterHealthText OPTIONAL,
repeaterHealthData      [3]    RepeaterHealthData OPTIONAL
}

```

```

RepeaterHealthState ::= ENUMERATED {
    other                (1),    --undefined or unknown
    ok                   (2),    --no known failures
    repeaterFailure      (3),    --known to have a repeater-related failure
    groupFailure         (4),    --known to have a group-related failure
    portFailure          (5),    --known to have a port-related failure
    generalFailure       (6)     --has a failure condition, unspecified type
}

```

```

RepeaterType ::= ENUMERATED {
    other                (1),    --See 30.2.5:
    unknown              (2),    --initializing, true state or type not yet known
    10 Mb/s              (9),    --Clause 9 10 Mb/s Baseband repeater
    100 Mb/sClassI      (271),   --Clause 27 class I 100 Mb/s Baseband repeater
    100 Mb/sClassII     (272),   --Clause 27 class II 100 Mb/s Baseband repeater
    1000 Mb/s           (41),    --Clause 41 1000 Mb/s Baseband repeater
    802.9a              (99)    --Integrated services repeater
}

```

```

RepeaterHealthText ::= PrintableString (SIZE (0..255))

```

```

RxState ::= ENUMERATED {
    current              (0),
    expired              (1),
    defaulted            (2),
    initialize           (3),
    lacpDisabled         (4),
    portDisabled         (5)
}

```

```

SectionStatus ::= BIT STRING (SIZE (2))

```

```

SESThreshold ::= INTEGER (0..2^32-1)

```

```

TrueFalse ::= BOOLEAN

```

```

TypeList ::= SEQUENCE OF TypeValue

```

```

TypeValue ::= ENUMERATED {
    global              (0),    --undefined
    other               (1),    --undefined
}

```

unknown	(2),	--initializing, true state not yet known
AUI	(7),	--no internal MAU, view from AUI
2BASE-TL	(63),	--see IEEE Std 802.3, Clause 61 and 63
10BASE5	(8),	--see IEEE Std 802.3, Clause 8
FOIRL	(9),	--see IEEE Std 802.3, 9.9
10BASE2	(10),	--see IEEE Std 802.3, Clause 10
10BROAD36	(11),	--see IEEE Std 802.3, Clause 11
10BASE-T	(14),	--see IEEE Std 802.3, Clause 14, duplex mode unknown
10BASE-THD	(141),	--see IEEE Std 802.3, Clause 14, half duplex mode
10BASE-TFD	(142),	--see IEEE Std 802.3, Clause 14, full duplex mode
10PASS-TS	(62),	--see IEEE Std 802.3, Clause 61 and 62
10BASE-FP	(16),	--see IEEE Std 802.3, Clause 16
10BASE-FB	(17),	--see IEEE Std 802.3, Clause 17
10BASE-FL	(18),	--see IEEE Std 802.3, Clause 18, duplex mode unknown
10BASE-FLHD	(181),	--see IEEE Std 802.3, Clause 18, half duplex mode
10BASE-FLFD	(182),	--see IEEE Std 802.3, Clause 18, full duplex mode
100BASE-T4	(23),	--see IEEE Std 802.3, Clause 23
100BASE-TX	(25),	--see IEEE Std 802.3, Clause 25, duplex mode unknown
100BASE-TXHD	(251),	--see IEEE Std 802.3, Clause 25, half duplex mode
100BASE-TXFD	(252),	--see IEEE Std 802.3, Clause 25, full duplex mode
100BASE-BX10D	(581),	--see IEEE Std 802.3, Clause 58, OLT
100BASE-BX10U	(582),	--see IEEE Std 802.3, Clause 58, ONU
100BASE-FX	(26),	--see IEEE Std 802.3, Clause 26, duplex mode unknown
100BASE-FXHD	(261),	--see IEEE Std 802.3, Clause 26, half duplex mode
100BASE-FXFD	(262),	--see IEEE Std 802.3, Clause 26, full duplex mode
100BASE-LX10	(58),	--see IEEE Std 802.3, Clause 58
100BASE-T2	(32),	--see IEEE Std 802.3, Clause 32, duplex mode unknown
100BASE-T2HD	(321),	--see IEEE Std 802.3, Clause 32, half duplex mode
100BASE-T2FD	(322),	--see IEEE Std 802.3, Clause 32, full duplex mode
1000BASE-X	(36),	--see IEEE Std 802.3, Clause 36, duplex mode unknown
1000BASE-BX10D	(591),	--see IEEE Std 802.3, Clause 59, OLT
1000BASE-BX10U	(592),	--see IEEE Std 802.3, Clause 59, ONU
1000BASE-XHD	(361),	--see IEEE Std 802.3, Clause 36, half duplex mode
1000BASE-XFD	(362),	--see IEEE Std 802.3, Clause 36, full duplex mode
1000BASE-LX	(381),	--see IEEE Std 802.3, Clause 38, duplex mode unknown
1000BASE-LXHD	(382),	--see IEEE Std 802.3, Clause 38, half duplex mode
1000BASE-LXFD	(383),	--see IEEE Std 802.3, Clause 38, full duplex mode
1000BASE-LX10	(59),	--see IEEE Std 802.3, Clause 59
1000BASE-PX10D	(601),	--see IEEE Std 802.3, Clause 60, OLT
1000BASE-PX10U	(602),	--see IEEE Std 802.3, Clause 60, ONU
1000BASE-PX20D	(603),	--see IEEE Std 802.3, Clause 60, OLT
1000BASE-PX20U	(604),	--see IEEE Std 802.3, Clause 60, ONU
1000BASE-SX	(384),	--see IEEE Std 802.3, Clause 38, duplex mode unknown
1000BASE-SXHD	(385),	--see IEEE Std 802.3, Clause 38, half duplex mode
1000BASE-SXFD	(386),	--see IEEE Std 802.3, Clause 38, full duplex mode
1000BASE-CX	(39),	--see IEEE Std 802.3, Clause 39, duplex mode unknown
1000BASE-CXHD	(391),	--see IEEE Std 802.3, Clause 39, half duplex mode
1000BASE-CXFD	(392),	--see IEEE Std 802.3, Clause 39, full duplex mode
1000BASE-KX	(393),	--see IEEE Std 802.3, Clause 70
1000BASE-T	(40),	--see IEEE Std 802.3, Clause 40, duplex mode unknown
1000BASE-THD	(401),	--see IEEE Std 802.3, Clause 40, half duplex mode
1000BASE-TFD	(402),	--see IEEE Std 802.3, Clause 40, full duplex mode
10GBASE-X	(48),	--see IEEE Std 802.3, Clause 48

```
10GBASE-LX4      (481), --see IEEE Std 802.3, Clause 53
10GBASE-CX4      (482), --see IEEE Std 802.3, Clause 54
10GBASE-KX4      (483), --see IEEE Std 802.3, Clause 71
10GBASE-R        (49),  --see IEEE Std 802.3, Clause 49
10GBASE-ER       (491), --see IEEE Std 802.3, Clause 52
10GBASE-LR       (492), --see IEEE Std 802.3, Clause 52
10GBASE-SR       (493), --see IEEE Std 802.3, Clause 52
10GBASE-LRM      (494), --see IEEE Std 802.3, Clause 68
10GBASE-KR       (495), --see IEEE Std 802.3, Clause 72
10GBASE-W        (50),  --see IEEE Std 802.3, Clauses 49 and 50
10GBASE-EW       (501), --see IEEE Std 802.3, Clause 52
10GBASE-LW       (502), --see IEEE Std 802.3, Clause 52
10GBASE-SW       (503), --see IEEE Std 802.3, Clause 52
10GBASE-T        (55),  --see IEEE Std 802.3, Clause 55
802.9a           (99)   --see IEEE Std 802.3, IEEE Std 802.9
}
END
```

## 영문표준 해설서

### 1. 개요

본 표준인 이더넷 관리 정보 베이스 (MIB)에 대한 개요, 범주, 목적, 인터넷 표준 관리 프레임워크 (IETF RFC 3410), 보안 고려 사항, 적합성 등을 기술한다.

### 2. 규정 참고 문헌

본 표준의 참고 문헌을 기술한다.

### 3. 정의

본 표준에서 사용하는 용어 정의를 기술한다.

### 4. 약어

본 표준에서 사용하는 약어를 기술한다.

### 5. 이더넷 LLDP (Logical Link Discovery Protocol) 확장 MIB 모듈

이더넷 논리 링크 탐색 프로토콜 (IEEE Std 802.1AB-2009) 확장을 관리하기 위한 MIB 구조, 다른 MIB 모듈들과의 관계, 보안 고려 사항, MIB 모듈 정의 등을 기술한다.

### 6. 이더넷 OAM (Operations, Administration, Maintenance) MIB 모듈

이더넷 OAM (단일-홉 링크 OAM; remote fault indication, link monitoring, remote loopback)를 관리하기 위한 MIB 구조, 다른 MIB 모듈들과의 관계, 토폴로지 매핑, MIB 모듈 정의 등을 기술한다.

### 7. 이더넷 리피터 장치 MIB 모듈

IEEE 802.3 리피터를 관리하기 위한 MIB 구조, 다른 MIB 모듈들과의 관계, 토폴로지 매핑 (IETF RFC 2108 Section 4), MIB 모듈 정의 등을 기술한다.

### 8. MDI (Media Dependent Interface)를 통한 이더넷 DTE (Data Terminal Equipment) 전원 MIB 모듈

MDI 전력 공급 장치 (PSE; Power Sourcing Equipment)를 통한 전원을 관리하기 위한 MIB 구조, 보안 고려 사항, MIB 모듈 정의 등을 기술한다.

### 9. EPON (Ethernet Passive Optical Network) MIB 모듈

1G-EPON 인터페이스를 관리하기 위한 MIB 구조, 다른 MIB 모듈들과의 관계, IEEE 802.3 관리 객체와의 매핑, 보안 고려 사항, MIB 모듈 정의 등을 기술한다.

**10. Ethernet-like 인터페이스 MIB 모듈**

Ethernet-like 인터페이스를 관리하기 위한 MIB 구조, 다른 MIB 모듈들과의 관계, 보안 고려 사항, MIB 모듈 정의 등을 기술한다.

**11. EFMCu (Ethernet in the First Mile copper) 인터페이스 MIB 모듈**

EFMCu (음성 수준의 구리선을 사용하는 2BASE-TL, 10PASS-TS) 인터페이스를 관리하기 위한 MIB 구조, 다른 MIB 모듈들과의 관계, 보안 고려 사항, MIB 모듈 정의 등을 기술한다.

**12. 이더넷 WIS (WAN Interface Sublayer) MIB 모듈**

이더넷 WIS (10GBASE-SW/LW/EW 에 사용하는 WAN Interface Sublayer)를 관리하기 위한 MIB 구조, 다른 MIB 모듈들과의 관계, 보안 고려 사항, MIB 모듈 정의 등을 기술한다.

**부속서 12A (정보) WIS MDIO 를 사용한 성능 데이터 수집**

WIS 성능 데이터를 수집하기 위해 IEEE Std 802.3 45.2.2 에서 정의하고 있는 WIS MDIO 레지스터들을 어떻게 관리 객체로 매핑하여 사용할 수 있는지를 기술한다.

**13. 이더넷 MAUs (Media Attachment Units) MIB 모듈**

이더넷 MAU 를 관리하기 위한 MIB 구조, 다른 MIB 모듈들과의 관계, 보안 고려 사항, IANA 고려 사항, MIB 모듈 정의 등을 기술한다.

**부속서 A (정보) 인용 문헌**

본 표준의 인용 문헌을 기술한다.

**부속서 B (규정) IEEE 802.3 관리 객체 클래스를 위한 관리 객체 정의 지침 (GDMO) 규격**

IEEE 802.3 관리 객체에 대해 ISO/IEC 10165-4:1992 의 템플릿을 사용하여 CMIP (Common Management Information Protocol)와 ISO/IEC 15802-2:1999 에 사용하기 위한 프로토콜 부호화를 기술한다.

**부속서 C (규정) 관리를 위한 GDMO 및 ASN.1 정의**

IEEE 802.3 관리 객체를 위한 관리 객체 정의 지침 (GDMO) 및 추상 구문 기법 (ASN.1)를 기술한다.

## 표준 작성 공헌자

표준 번호 : TTAE.IE-802.3.1-2011

이 표준의 제.개정 및 발간을 위해 아래와 같이 여러분들이 공헌하셨습니다.

구분	성명	위원회 및 직위	연락처	소속사
과제 제안	강태규	이더넷 PG(P218) 위원	tkkang@etri.re.kr	ETRI
	한국이더넷포럼	-	-	-
표준 초안 작성자	강태규	이더넷 PG(P218) 위원	tkkang@etri.re.kr	ETRI
표준 초안 에디터	강태규	이더넷 PG(P218) 위원	tkkang@etri.re.kr	ETRI
표준 초안 검토 및 작성	최진식	이더넷 PG(PG218) 의장	jinseek@hanyang.ac.kr	한양대학교
	-	외 프로젝트 그룹 위원	-	-
표준안 심의	민경선	전송통신 기술위원회 의장	Minks808@paran.com	KT CS
	-	외 기술위원회 위원	-	-
사무국 담당	박정식	통신융합부 부장	031-724-0080	TTA
	오구영	통신융합부 책임	031-724-0081	TTA



정보통신단체표준(영문표준)

이더넷 관리 정보 베이스(MIB) 정의(IEEE802.3.1-2011)  
(Management Information Base (MIB) Definitions for Ethernet)

발행인 : 한국정보통신기술협회 회장

발행처 : 한국정보통신기술협회

463-824, 경기도 성남시 분당구 서현동 267-2

Tel : 031-724-0114, Fax : 031-724-0109

발행일 : 2012. 12

---