

3GPP-(Technical Speciation
Group Core Network and
Terminals; 5G System; Usage of
the Unified Data Repository
services for Subscription Data;
Stage 3)



본 문서에 대한 저작권은 TTA에 있으며, TTA와 사전 협의 없이 이 문서의 전체 또는 일부를 상업적 목적으로 복제 또는 배포해서는 안 됩니다.

Copyright 20xx, Telecommunications Technology Association.
All rights reserved.

3GPP TS 29.505 V15.0.0 (2018-06)

Technical Specification

**3rd Generation Partnership Project;
Technical Specification Group Core Network and Terminals;
5G System; Usage of the Unified Data Repository services for
Subscription Data;
Stage 3
(Release 15)**



Keywords

3gpp, 5G systems

3GPP

Postal address

3GPP support office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Internet

<http://www.3gpp.org>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© 2018, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
All rights reserved.

UMTS™ is a Trade Mark of ETSI registered for the benefit of its members
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners
LTE™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners
GSM® and the GSM logo are registered and owned by the GSM Association

Contents

Foreword	6
1 Scope	7
2 References	7
3 Definitions and abbreviations	7
3.1 Definitions	7
3.2 Abbreviations	8
4 Overview	8
5 Usage of Nudr_DataRepository Service	8
5.1 Introduction	8
5.2 Resources	9
5.2.1 Overview	9
5.2.2 Resource: AuthenticationData	13
5.2.2.1 Description	13
5.2.2.2 Resource Definition	13
5.2.2.3 Resource Standard Methods	14
5.2.2.3.1 GET	14
5.2.2.3.2 PATCH	14
5.2.3 Resource: AccessAndMobilitySubscriptionData	15
5.2.3.1 Description	15
5.2.3.2 Resource Definition	15
5.2.3.3 Resource Standard Methods	15
5.2.3.3.1 GET	15
5.2.4 Resource: SmfSelectionSubscriptionData	16
5.2.4.1 Description	16
5.2.4.2 Resource Definition	16
5.2.4.3 Resource Standard Methods	16
5.2.4.3.1 GET	16
5.2.5 Resource: SessionManagementSubscriptionData	17
5.2.5.1 Description	17
5.2.5.2 Resource Definition	17
5.2.5.3 Resource Standard Methods	17
5.2.5.3.1 GET	17
5.2.6 Resource: Amf3GppAccessRegistration	18
5.2.6.1 Description	18
5.2.6.2 Resource Definition	18
5.2.6.3 Resource Standard Methods	18
5.2.6.3.1 PUT	18
5.2.6.3.2 PATCH	19
5.2.6.3.3 GET	19
5.2.7 Resource: AmfNon3GppAccessRegistration	20
5.2.7.1 Description	20
5.2.7.2 Resource Definition	20
5.2.7.3 Resource Standard Methods	20
5.2.7.3.1 PUT	20
5.2.7.3.2 PATCH	21
5.2.7.3.3 GET	21
5.2.8 Resource: SmfRegistrations	22
5.2.8.1 Description	22
5.2.8.2 Resource Definition	22
5.2.8.3 Resource Standard Methods	22
5.2.8.3.1 GET	22
5.2.9 Resource: IndividualSmfRegistration	23
5.2.9.1 Description	23
5.2.9.2 Resource Definition	23

5.2.9.3	Resource Standard Methods	23
5.2.9.3.1	PUT	23
5.2.9.3.2	DELETE	24
5.2.9.3.3	GET	24
5.2.10	Resource: OperatorSpecificData	24
5.2.10.1	Description	24
5.2.10.2	Resource Definition	25
5.2.10.3	Resource Standard Methods	25
5.2.10.3.1	GET	25
5.2.10.3.2	PATCH	25
5.2.11	Resource: Smsf3GppAccessRegistration	26
5.2.11.1	Description	26
5.2.11.2	Resource Definition	26
5.2.11.3	Resource Standard Methods	26
5.2.11.3.1	PUT	26
5.2.11.3.2	DELETE	27
5.2.11.3.4	GET	27
5.2.12	Resource: SmsfNon3GppAccessRegistration	28
5.2.12.1	Description	28
5.2.12.2	Resource Definition	28
5.2.12.3	Resource Standard Methods	28
5.2.12.3.1	PUT	28
5.2.12.3.2	DELETE	29
5.2.12.3.4	GET	29
5.2.13	Resource: SMSManagementSubscriptionData	30
5.2.13.1	Description	30
5.2.13.2	Resource Definition	30
5.2.13.3	Resource Standard Methods	30
5.2.13.3.1	GET	30
5.2.14	Resource: ProvisionedParameterData	31
5.2.14.1	Description	31
5.2.14.2	Resource Definition	31
5.2.14.3	Resource Standard Methods	31
5.2.14.3.1	GET	31
5.2.14.3.2	PATCH	32
5.2.15	Resource: SMSSubscriptionData	32
5.2.15.1	Description	32
5.2.15.2	Resource Definition	32
5.2.15.3	Resource Standard Methods	32
5.2.15.3.1	GET	32
5.2.16	Resource: SdmSubscriptions	33
5.2.16.1	Description	33
5.2.16.2	Resource Definition	33
5.2.16.3	Resource Standard Methods	33
5.2.16.3.1	GET	33
5.2.16.3.2	POST	33
5.2.17	Resource: IndividualSdmSubscription	34
5.2.17.1	Description	34
5.2.17.2	Resource Definition	34
5.2.17.3	Resource Standard Methods	34
5.2.17.3.1	PUT	34
5.2.17.3.2	DELETE	35
5.2.18	Resource: EeSubscriptions	35
5.2.18.1	Description	35
5.2.18.2	Resource Definition	35
5.2.18.3	Resource Standard Methods	36
5.2.18.3.1	GET	36
5.2.18.3.2	POST	36
5.2.19	Resource: IndividualEeSubscription	37
5.2.19.1	Description	37
5.2.19.2	Resource Definition	37
5.2.19.3	Resource Standard Methods	37

5.2.19.3.1	PUT	37
5.2.19.3.2	DELETE	38
5.2.20	Resource: SubscriptionDataSubscriptions	38
5.2.20.1	Description	38
5.2.20.2	Resource Definition	38
5.2.20.3	Resource Standard Methods	38
5.2.20.3.1	POST	38
5.2.21	Resource: IndividualSubscriptionDataSubscription	39
5.2.21.1	Description	39
5.2.21.2	Resource Definition	39
5.2.21.3	Resource Standard Methods	39
5.2.21.3.1	DELETE	39
5.3	Notifications	40
5.3.1	General	40
5.3.2	Data Change Notification	40
5.4	Data Model	41
5.4.1	General	41
5.4.2	Structured data types	41
5.4.2.1	Introduction	41
5.4.2.2	Type: AuthenticationData	42
5.4.2.3	Type: OperatorSpecificDataContainer	42
5.4.2.4	Type: SmfRegList	42
5.4.2.5	Type: SubscriptionDataSubscriptions	42
5.4.2.6	Type: DataChangeNotify	43
5.4.3	Simple data types and enumerations	43
5.4.3.1	Introduction	43
5.4.3.2	Simple data types	43
5.4.3.3	Enumeration: AuthMethod	44
5.4.4	Binary data	44
5.5	Error handling	44
5.6	Feature negotiation	44
Annex A (normative):	OpenAPI specification	44
A.1	General	44
A.2	Nudr_DataRepository API	44

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the usage of the Unified Data Repository services for subscription data. It provides the resource definition and data model for subscription data used over the Nudr Service Based Interface. The protocol definition for Nudr Service Based Interface which is specific to subscription data is also specified in the present document.

The stage 3 protocol definition for Nudr Service Based Interface which is common for subscription data, policy data, structure data and application data for exposure is specified in 3GPP TS 29.504 [2].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 29.504: "5G System; Unified Data Repository Services; Stage 3".
- [3] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces Stage 3".
- [4] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [5] 3GPP TS 23.003: "Numbering, addressing and identification".
- [6] 3GPP TS 29.503: "Unified Data Management Services".
- [7] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [8] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

pointer of attribute: The pointer of the attribute identifies the location of the attribute in the JSON object. The pointer of the attribute is a string with one or more segments, each segment is the name of an attribute within that JSON object, different segments are separated with a "/".

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

5GC	5G Core
AMF	Access and Mobility Management Function
DNN	Data Network Name
GPSI	Generic Public Subscription Identifier
JSON	Javascript Object Notation
SMF	Session Management Function
SMS	Short Message Service
SMSF	SMS Function
SUPI	Subscription Permanent Identifier
UDM	Unified Data Management
UDR	Unified Data Repository

4 Overview

The resources, data model and usage defined in the present document are used by the 5GC NFs (e.g. UDM) to access the subscription data via the Unified Data Repository services specified in 3GPP TS 29.504 [2].

5 Usage of Nudr_DataRepository Service

5.1 Introduction

The following subclauses specify the usage of Nudr_DataRepository service for subscription data. The principles specified in 3GPP TS 29.504 [2] are followed unless explicitly specified otherwise in the following subclauses.

5.2 Resources

5.2.1 Overview

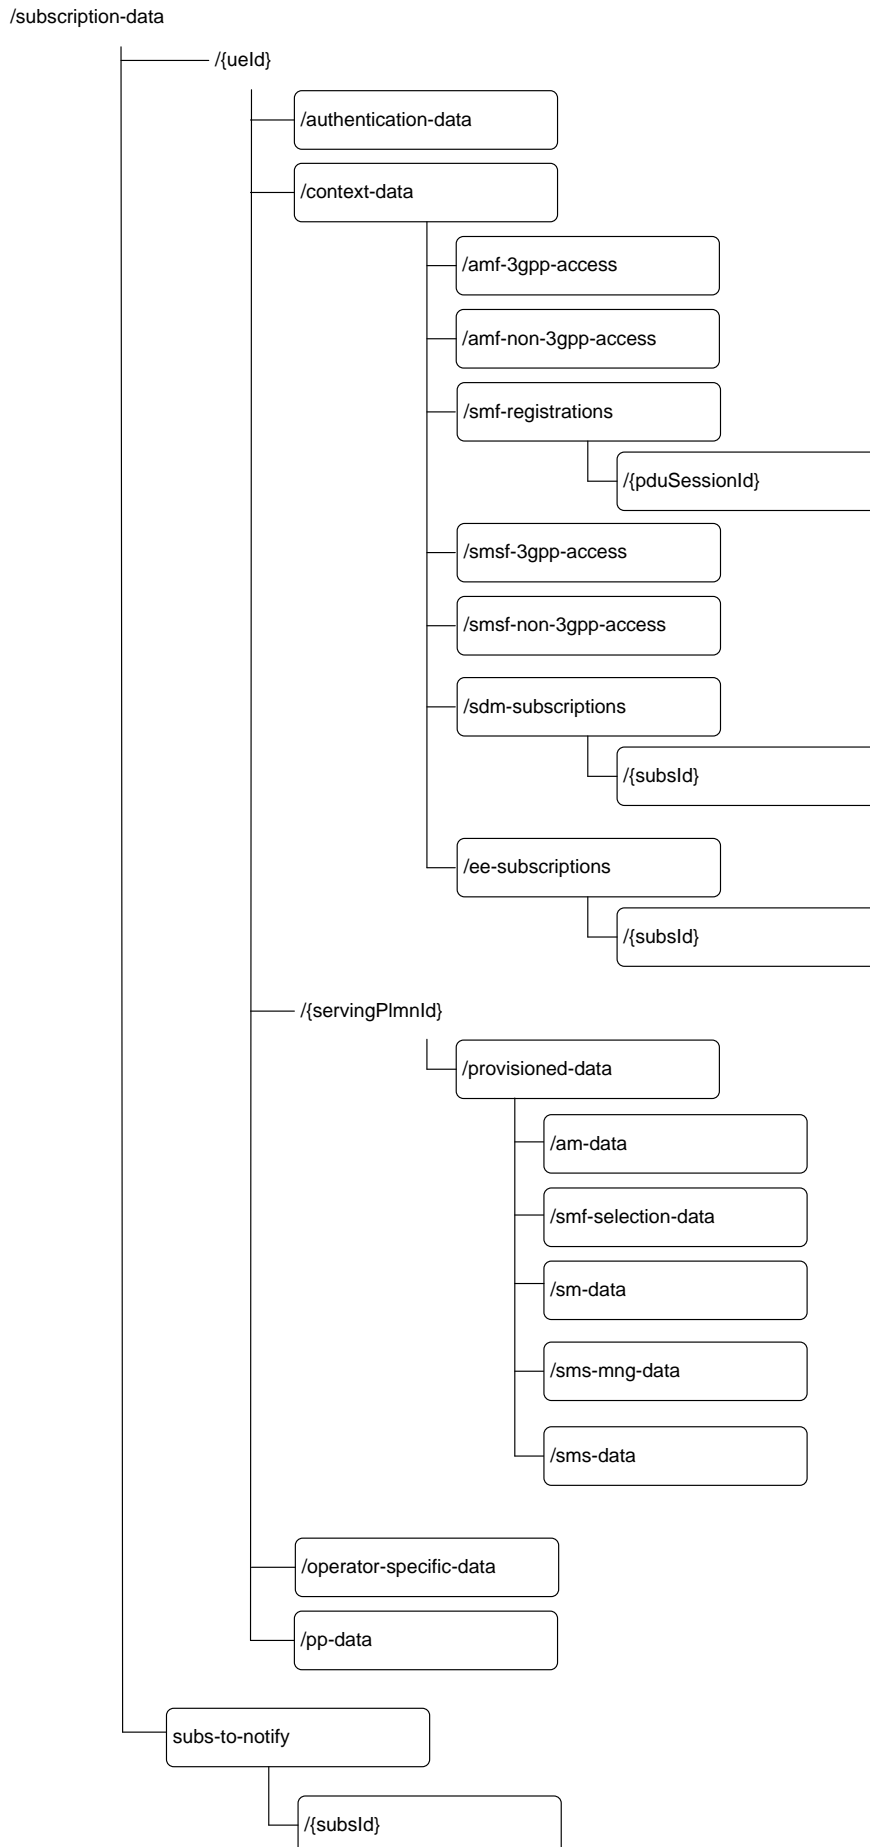


Figure 5.2.1-1: Resource URI sub-level structure for subscription data

Table 5.2.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.2.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
AuthenticationData	/subscription-data/{ueid}/authentication-data	GET	retrieve a UE's authentication data
		PATCH	update a UE's authentication data
AccessAndMobilitySubscriptionData	/subscription-data/{ueid}/{servingPlmnId}/provisioned-data /am-data	GET	Retrieve the UE's subscribed Access and Mobility Data
SmfSelectionSubscriptionData	/subscription-data/{ueid}/{servingPlmnId}/provisioned-data/smf-selection-data	GET	Retrieve the UE's subscribed SMF Selection Data
SessionManagementSubscriptionData	/subscription-data/{ueid}/{servingPlmnId}/provisioned-data/sm-data	GET	Retrieve the UE's subscribed SM Subscription Data
Amf3GppAccessRegistration	subscription-data/{ueid}/context-data/amf-3gpp-access	PUT	Create and Update the AMF registration for 3GPP access
		PATCH	Modify the AMF registration for 3GPP access
		GET	Retrieve the AMF registration information for 3GPP access
AmfNon3GppAccessRegistration	subscription-data/{ueid}/ context-data/amf-non-3gpp-access	PUT	Update the AMF registration for non 3GPP access
		PATCH	Modify the AMF registration for non 3GPP access
		GET	Retrieve the AMF registration information for non 3GPP access
SmfRegistrations	subscription-data/{ueid}/context-data/smf-registrations	GET	Retrieve the list of the SMF registrations
IndividualSmfRegistration	subscription-data/{ueid}/context-data /smf-registrations/{pduSessionId}	PUT	Store an individual SMF registration identified by PDU Session Id
		DELETE	Delete an individual SMF registration
		GET	Retrieve individual SMF registration
OperatorSpecificData	/subscription-data/{ueid}/operator-specific-data	GET	retrieve the operator specific subscription data of a UE
		PATCH	modify the operator specific subscription data of a UE
SMSManagementSubscriptionData	/subscription-data/{ueid}/{servingPlmnId}/provisioned-data/sms-mng-data	GET	Retrieve the UE's subscribed SMS management subscription data.
Smsf3GppAccessRegistration	subscription-data/{ueid}/context-data /smsf-3gpp-access	PUT	Create or Update the SMSF registration
		DELETE	Delete the SMSF registration for 3GPP access
		GET	Retrieve the SMSF registration information
SmsfNon3GppAccessRegistration	subscription-data/{ueid}/context-data /smsf-non-3gpp-access	PUT	Create or Update the SMSF registration for

			non 3GPP access
		DELETE	Delete the SMSF registration for non 3GPP access
		GET	Retrieve the SMSF registration information for non 3GPP access
SdmSubscriptions	/subscription-data/{ueId}/context-data/sdm-subscriptions	GET	Retrieve SDM subscriptions
		POST	Create an individual SDM subscription
IndividualSdmSubscription	/subscription-data/{ueId}/context-data/sdm-subscriptions/{subId}	PUT	Store an individual SDM subscription
		DELETE	Delete an individual SDM subscription
EeSubscriptions	/subscription-data/{ueId}/context-data/ee-subscriptions	GET	Retrieve EE subscriptions
		POST	Create an EE subscription
IndividualEeSubscription	/subscription-data/{ueId}/context-data/ee-subscriptions/{subId}	PUT	Store/update an individual EE subscription
		DELETE	Delete an individual EE subscription
ProvisionedParameterData	/subscription-data/{ueId}/pp-data	PATCH	Update of provisioned parameters.
		GET	Retrieves the UE's provisioned parameters.
SMSSubscriptionData	/subscription-data/{ueId}/{servingPlmnId}/provisioned-data/sms-data	GET	Retrieve the UE's subscribed SMS subscription data.
SubscriptionDataSubscriptions	/subscription-data/subs-to-notify	POST	Create a subscription, i.e. subscribe a node to receive notification for change of data
IndividualSubscriptionDataSubscription	/subscription-data/subs-to-notify/{subId}	DELETE	Delete the subscription identified by {subId}, i.e. unsubscribe a node to receive notification for change of data

5.2.2 Resource: AuthenticationData

5.2.2.1 Description

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.2.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/authentication-data

This resource shall support the resource URI variables defined in table 5.2.2.2-1.

Table 5.2.2.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-.+ msisdn-[0-9]{5,15} extid-.+ .+)"

5.2.2.3 Resource Standard Methods

5.2.2.3.1 GET

This method shall support the URI query parameters specified in table 5.2.2.3.1-1.

Table 5.2.2.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.2.3.1-2 and the response data structures and response codes specified in table 5.2.2.3.1-3.

Table 5.2.2.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.2.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AuthenticationData	M	1	200 OK	Upon success, a response body containing the AuthenticationData shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.2.3.2 PATCH

This method is used to modify the authentication data of UE in the UDR.

This method shall support the URI query parameters specified in table 5.2.2.3.2-1.

Table 5.2.2.3.2-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.2.3.2-2 and the response data structures and response codes specified in table 5.2.2.3.2-3.

Table 5.2.2.3.2-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
array(PatchItem)	M	1..N	Contains the delta data to the authentication data of a UE

Table 5.2.2.3.2-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon successful modification there is no body in the response message.
ProblemDetails	M	1	403 Forbidden	One or more attributes are not allowed to be modified according to e.g. policy or local configuration. The invalidParams attribute shall contain the JSON pointers of attributes which are not allowed to be modified. The cause attribute shall be set to "MODIFY_NOT_ALLOWED", see 3GPP TS 29.500 [8] table 5.2.7.2-1.

NOTE: In addition common data structures as listed in table 5.5-1 are supported.

5.2.3 Resource: AccessAndMobilitySubscriptionData

5.2.3.1 Description

This resource represents the subscribed AccessAndMobilitySubscriptionData for a SUPI for use in a serving PLMN. It is queried by the AMF via the UDM after registering.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.3.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/{servingPlmnId}/provisioned-data/am-data

This resource shall support the resource URI variables defined in table 5.2.3.2-1.

Table 5.2.3.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-.+ msisdn-[0-9]{5,15} extid-.+ .+)"
servingPlmnId	Represents the Serving PLMN ID (<MCC><MNC>) pattern: "[0-9]{5,6}"

5.2.3.3 Resource Standard Methods

5.2.3.3.1 GET

This method shall support the URI query parameters specified in table 5.2.3.3.1-1.

Table 5.2.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
fields	array(string)	C	0..N	When the NF consumer only retrieves a subset of the resource, the " fields " query parameter shall be included. The " fields " query parameter contains the pointers of the attribute(s) to be retrieved.

This method shall support the request data structures specified in table 5.2.3.3.1-2 and the response data structures and response codes specified in table 5.2.3.3.1-3.

Table 5.2.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AccessAndMobilitySubscriptionData	M	1	200 OK	Upon success, a response body containing the Access and Mobility Subscription Data shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.4 Resource: SmfSelectionSubscriptionData

5.2.4.1 Description

This resource represents the subscribed SmfSelectionSubscriptionData for a SUPI. It is queried by the UDM triggered by the AMF after registering.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.4.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/{servingPlmnId}/provisioned-data/smf-selection-subscription-data

This resource shall support the resource URI variables defined in table 5.2.4.2-1.

Table 5.2.4.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-+ msisdn-[0-9]{5,15} extid-+ .+)")
servingPlmnId	Represents the Serving PLMN ID (<MCC><MNC>) pattern: "[0-9]{5,6}"

5.2.4.3 Resource Standard Methods

5.2.4.3.1 GET

This method shall support the URI query parameters specified in table 5.2.4.3.1-1.

Table 5.2.4.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
fields	array(string)	C	0..N	When the NF consumer only retrieves a subset of the resource, the " fields " query parameter shall be included. The " fields " query parameter contains the pointers of the attribute(s) to be retrieved.

This method shall support the request data structures specified in table 5.2.4.3.1-2 and the response data structures and response codes specified in table 5.2.4.3.1-3.

Table 5.2.4.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.4.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SmfSelectionSubscriptionData	M	1	200 OK	Upon success, a response body containing the SMF Selection Subscription Data for the user shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.5 Resource: SessionManagementSubscriptionData

5.2.5.1 Description

This resource represents the subscribed SessionManagementSubscriptionData for a SUPI. It is queried by the UDM triggered by the SMF during session setup, using one or both of query parameters representing the selected network slice and the DNN.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.5.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{supi}/{servingPlmnId}/provisioned-data/sm-data

This resource shall support the resource URI variables defined in table 5.2.5.2-1.

Table 5.2.5.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueld	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-.+ msisdn-[0-9]{5,15} extid-.+ .+)"
servingPlmnId	Represents the Serving PLMN ID (<MCC><MNC>) pattern: "[0-9]{5,6}"

5.2.5.3 Resource Standard Methods

5.2.5.3.1 GET

This method shall support the URI query parameters specified in table 5.2.5.3.1-1.

Table 5.2.5.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
singleNssai	Snssai	O	0..1	
dnn	Dnn	O	0..1	
fields	array(string)	C	0..N	When the NF consumer only retrieves a subset of the resource, the " fields " query parameter shall be included. The " fields " query parameter contains the pointers of the attribute(s) to be retrieved.

If "singleNssai" is not included, and "dnn" is not included, UDR shall return all DNN configurations for all network slice(s).

If "singleNssai" is included, and "dnn" is not included, UDR shall return all DNN configurations for the requested network slice identified by "singleNssai".

If "singleNssai" is not included, and "dnn" is included, UDR shall return all DNN configurations identified by "dnn" for all network slices where such DNN is available.

If "singleNssai" is included, and "dnn" is included, UDR shall return the DNN configuration identified by "dnn", if such DNN is available in the network slice identified by "singleNssai".

This method shall support the request data structures specified in table 5.2.5.3.1-2 and the response data structures and response codes specified in table 5.2.5.3.1-3.

Table 5.2.5.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.5.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SessionManagementSubscriptionData	M	1..N	200 OK	Upon success, a response body containing the Session Management Subscription data shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.6 Resource: Amf3GppAccessRegistration

5.2.6.1 Description

This resource is used to represent AMF registrations to be stored in the UDR by the UDM.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.6.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/context-data/amf-3gpp-access

This resource shall support the resource URI variables defined in table 5.2.6.2-1.

Table 5.2.6.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-+ msisdn-[0-9]{5,15} extid-+ .+)".

5.2.6.3 Resource Standard Methods

5.2.6.3.1 PUT

This method shall support the URI query parameters specified in table 5.2.6.3.1-1.

Table 5.2.6.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.6.3.1-2 and the response data structures and response codes specified in table 5.2.6.3.1-3.

Table 5.2.6.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
Amf3GppAccessRegistration	M	1	The AMF registration for 3GPP access is replaced with the received information.

Table 5.2.6.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.6.3.2 PATCH

This method is used to modify AMF registration data for 3GPP access in the UDR.

This method shall support the URI query parameters specified in table 5.2.6.3.2-1.

Table 5.2.6.3.2-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.6.3.2-2 and the response data structures and response codes specified in table 5.2.6.3.2-3.

Table 5.2.6.3.2-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
array(PatchItem)	M	1..N	Contains the delta data to the AMF registration data for 3GPP access

Table 5.2.6.3.2-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon successful modification there is no body in the response message.
ProblemDetails	M	1	403 Forbidden	One or more attributes are not allowed to be modified according to e.g. policy or local configuration. The invalidParams attribute shall contain the JSON pointers of attributes which are not allowed to be modified. The cause attribute shall be set to "MODIFY_NOT_ALLOWED", see 3GPP TS 29.500 [8] table 5.2.7.2-1.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.6.3.3 GET

This method shall support the URI query parameters specified in table 5.2.6.3.1-1.

Table 5.2.6.3.3-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
fields	array(string)	C	0..N	When the NF consumer only retrieves a subset of the resource, the " fields " query parameter shall be included. The " fields " query parameter contains the pointers of the attribute(s) to be retrieved.

This method shall support the request data structures specified in table 5.2.6.3.3-2 and the response data structures and response codes specified in table 5.2.6.3.3-3.

Table 5.2.6.3.3-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.6.3.3-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
Amf3GppAccessRegistration	M	1	200 OK	Upon success, a response body containing the Amf3GppAccessRegistration shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.7 Resource: AmfNon3GppAccessRegistration

5.2.7.1 Description

This resource is used to represent AMF registrations to be stored in the UDR.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.7.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/context-data/amf-non-3gpp-access

This resource shall support the resource URI variables defined in table 5.2.7.2-1.

Table 5.2.72-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-.+ msisdn-[0-9]{5,15} extid-.+ .+)".

5.2.7.3 Resource Standard Methods

5.2.7.3.1 PUT

This method shall support the URI query parameters specified in table 5.2.7.3.1-1.

Table 5.2.7.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.7.3.1-2 and the response data structures and response codes specified in table 5.2.7.3.1-3.

Table 5.2.7.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
AmfNon3GppAccessRegistration	M	1	The AMF registration for non 3GPP access is replaced with the received information.

Table 5.2.7.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.7.3.2 PATCH

This method is used to modify AMF registration data for non-3GPP access in the UDR.

This method shall support the URI query parameters specified in table 5.2.7.3.2-1.

Table 5.2.7.3.2-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.7.3.2-2 and the response data structures and response codes specified in table 5.2.7.3.2-3.

Table 5.2.7.3.2-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
array(PatchItem)	M	1..N	Contains the delta data to the AMF registration data for non-3GPP access

Table 5.2.7.3.2-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon successful modification there is no body in the response message.
ProblemDetails	M	1	403 Forbidden	One or more attributes are not allowed to be modified according to e.g. policy or local configuration. The invalidParams attribute shall contain the JSON pointers of attributes which are not allowed to be modified. The cause attribute shall be set to "MODIFY_NOT_ALLOWED", see 3GPP TS 29.500 [8] table 5.2.7.2-1.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.7.3.3 GET

This method shall support the URI query parameters specified in table 5.2.7.3.1-1.

Table 5.2.7.3.3-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
fields	array(string)	C	0..N	When the NF consumer only retrieves a subset of the resource, the " fields " query parameter shall be included. The " fields " query parameter contains the pointers of the attribute(s) to be retrieved.

This method shall support the request data structures specified in table 5.2.7.3.3-2 and the response data structures and response codes specified in table 5.2.7.3.3-3.

Table 5.2.7.3.3-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
AmfNon3GppAccessRegistration	M	1	The AMF registration for non 3GPP access is replaced with the received information.

Table 5.2.7.3.3-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AmfNon3GppAccessRegistration	M	1	200 OK	Upon success, a response body containing the Amf3GppAccessRegistration shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.8 Resource: SmfRegistrations

5.2.8.1 Description

This resource is used to represent SMF registrations to be stored in the UDR.

This resource is modelled with the Store resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.8.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/context-data/smf-registrations

This resource shall support the resource URI variables defined in table 6.2.3.4.2-1.

Table 5.2.8.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See subclause 6.4.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [2] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-+ msisdn-[0-9]{5,15} extid-+ .+)".

5.2.8.3 Resource Standard Methods

5.2.8.3.1 GET

This method shall support the URI query parameters specified in table 5.2.8.3.1-1.

Table 5.2.8.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.8.3.1-2 and the response data structures and response codes specified in table 5.2.8.3.1-3.

Table 5.2.8.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.8.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SmfRegList	M	1	200 OK	Upon success, a response body containing the list of SMF registrations of the relevant UE shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.9 Resource: IndividualSmfRegistration

5.2.9.1 Description

This resource is used to represent individual PDU session SMF registrations to be stored in the UDR.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.9.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/{ueId}/context-data/smf-registrations/{pduSessionId}

This resource shall support the resource URI variables defined in table 5.2.9.2-1.

Table 5.2.9.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See subclause 6.4.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [y] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-+ msisdn-[0-9]{5,15} extid-+ .+)")
pduSessionId	The pduSessionId identifies an individual SMF registration.

5.2.9.3 Resource Standard Methods

5.2.9.3.1 PUT

This method shall support the URI query parameters specified in table 5.2.9.3.1-1.

Table 5.2.9.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.9.3.1-2 and the response data structures and response codes specified in table 5.2.9.3.1-3.

Table 5.2.9.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
SmfRegistration	M	1	The registration that is to be created

Table 5.2.9.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SmfRegistration	M	1	201 Created	Upon success, a response body containing a representation of the created Individual SmfRegistration resource shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.9.3.2 DELETE

This method shall support the URI query parameters specified in table 5.2.9.3.2-1.

Table 5.2.9.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.9.3.2-2 and the response data structures and response codes specified in table 5.2.9.3.2-3.

Table 5.2.9.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.9.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned.

NOTE: In addition common data structures as listed in table 5.5-1 are supported.

5.2.9.3.3 GET

This method shall support the URI query parameters specified in table 5.2.9.3.3-1.

Table 5.2.9.3.3-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
fields	array(string)	C	0..N	When the NF consumer only retrieves a subset of the resource, the " fields " query parameter shall be included. The " fields " query parameter contains the pointers of the attribute(s) to be retrieved.

This method shall support the request data structures specified in table 5.2.9.3.3-2 and the response data structures and response codes specified in table 5.2.9.3.3-3.

Table 5.2.9.3.3-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.9.3.3-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SmfRegistration	M	1	200 OK	The SMF registration that is to be retrieved

NOTE: In addition common data structures as listed in table 5.5-1 are supported.

5.2.10 Resource: OperatorSpecificData

5.2.10.1 Description

This resource represents the UE's operator specific data.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.10.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/operator-specific-data

This resource shall support the resource URI variables defined in table 5.2.10.2-1.

Table 5.2.10.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] subclause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-.+ msisdn-[0-9]{5,15} extid-.+ .+)"

Editor's Note: It is FFS whether both SUPI and GPSI can be used for all methods, or each can only be used for some of the methods.

5.2.10.3 Resource Standard Methods

5.2.10.3.1 GET

This method is used to retrieve operator specific data from the UDR.

This method shall support the URI query parameters specified in table 5.2.10.3.1-1.

Table 5.2.10.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
fields	array(string)	C	0..N	When the NF consumer only retrieves a subset of the resource, the " fields " query parameter shall be included. The " fields " query parameter contains the pointers of the attribute(s) to be retrieved.

This method shall support the request data structures specified in table 5.2.10.3.1-2 and the response data structures and response codes specified in table 5.2.10.3.1-3.

Table 5.2.10.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.10.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
map(OperatorSpecificDataContainer)	M	1..N	200 OK	Upon success, a response body containing a map shall be returned. The key of the map is operator specific data element name and the value is the operator specific data of the UE.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.10.3.2 PATCH

This method is used to modify operator specific data in the UDR.

This method shall support the URI query parameters specified in table 5.2.10.3.2-1.

Table 5.2.10.3.2-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.10.3.2-2 and the response data structures and response codes specified in table 5.2.10.3.2-3.

Table 5.2.10.3.2-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
array(PatchItem)	M	1..N	Contains the delta data to the operator specific data

Table 5.2.10.3.2-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon successful modification there is no body in the response message.
ProblemDetails	M	1	403 Forbidden	One or more attributes are not allowed to be modified according to e.g. policy or local configuration. The invalidParams attribute shall contain the JSON pointers of attributes which are not allowed to be modified. The cause attribute shall be set to "MODIFY_NOT_ALLOWED", see 3GPP TS 29.500 [8] table 5.2.7.2-1.

NOTE: In addition common data structures as listed in table 5.5-1 are supported.

5.2.11 Resource: Smsf3GppAccessRegistration

5.2.11.1 Description

This resource represents registered SMSF for 3GPP access.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).-

5.2.11.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/context-data/smsf-3gpp-access

This resource shall support the resource URI variables defined in table 5.2.11.2-1.

Table 5.2.11.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-.+ msisdn-[0-9]{5,15} extid-.+ .+)"

5.2.11.3 Resource Standard Methods

5.2.11.3.1 PUT

This method shall support the URI query parameters specified in table 5.2.11.3.1-1.

Table 5.2.11.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.11.3.1-2 and the response data structures and response codes specified in table 5.2.11.3.1-3.

Table 5.2.11.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
SmsfRegistration	M	1	The SMSF registration for 3GPP access is created or updated with the received information.

Table 5.2.11.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.11.3.2 DELETE

This method shall support the URI query parameters specified in table 5.2.11.3.2-1.

Table 5.2.11.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.11.3.2-2 and the response data structures and response codes specified in table 5.2.11.3.2-3.

Table 5.2.11.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			The request body shall be empty.

Table 5.2.11.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.11.3.4 GET

This method shall support the URI query parameters specified in table 5.2.11.3.4-1.

Table 5.2.11.3.4-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
fields	array(string)	C	0..N	When the NF consumer only retrieves a subset of the resource, the " fields " query parameter shall be included. The " fields " query parameter contains the pointers of the attribute(s) to be retrieved.

This method shall support the request data structures specified in table 5.2.11.3.4-2 and the response data structures and response codes specified in table 5.2.11.3.4-3.

Table 5.2.11.3.4-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.11.3.4-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SmsfRegistration	M	1	200 OK	Upon success, a response body containing the SMSF registration for 3GPP access Data shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.12 Resource: SmsfNon3GppAccessRegistration

5.2.12.1 Description

This resource represents registered SMSF for Non 3GPP access.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.12.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/context-data/smsf-non-3gpp-access

This resource shall support the resource URI variables defined in table 5.2.12.2-1.

Table 5.2.12.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-+ msisdn-[0-9]{5,15} extid-+ .+)"

5.2.12.3 Resource Standard Methods

5.2.12.3.1 PUT

This method shall support the URI query parameters specified in table 5.2.12.3.1-1.

Table 5.2.12.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.12.3.1-2 and the response data structures and response codes specified in table 5.2.12.3.1-3.

Table 5.2.12.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
SmsfRegistration	M	1	The SMSF registration for non 3GPP access is created or updated with the received information.

Table 5.2.12.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned

NOTE: In addition common data structures as listed in table 5.5-1 are supported.

5.2.12.3.2 DELETE

This method shall support the URI query parameters specified in table 5.2.12.3.2-1.

Table 5.2.12.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.12.3.2-2 and the response data structures and response codes specified in table 5.2.12.3.2-3.

Table 5.2.12.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			The request body shall be empty.

Table 5.2.12.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned.

NOTE: In addition common data structures as listed in table 5.5-1 are supported.

5.2.12.3.4 GET

This method shall support the URI query parameters specified in table 5.2.12.3.4-1.

Table 5.2.12.3.4-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
fields	array(string)	C	0..N	When the NF consumer only retrieves a subset of the resource, the " fields " query parameter shall be included. The " fields " query parameter contains the pointers of the attribute(s) to be retrieved.

This method shall support the request data structures specified in table 5.2.12.3.4-2 and the response data structures and response codes specified in table 5.2.12.3.4-3.

Table 5.2.12.3.4-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.12.3.4-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SmsfRegistration	M	1	200 OK	Upon success, a response body containing the SMSF registration for non 3GPP access Data shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.13 Resource: SMSManagementSubscriptionData

5.2.13.1 Description

This resource represents the subscribed SMSManagementSubscriptionData for a SUPI for use in a serving PLMN. It is queried by the SMSF via the UDM after registering.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.13.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/{servingPlmnId}/provisioned-data/sms-mng-data

This resource shall support the resource URI variables defined in table 5.2.13.2-1.

Table 5.2.13.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-+ msisdn-[0-9]{5,15} extid-+ .+)")
servingPlmnId	Represents the Serving PLMN ID (<MCC><MNC>) pattern: "[0-9]{5,6}"

5.2.13.3 Resource Standard Methods

5.2.13.3.1 GET

This method shall support the URI query parameters specified in table 5.2.13.3.1-1.

Table 5.2.13.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.13.3.1-2 and the response data structures and response codes specified in table 5.2.13.3.1-3.

Table 5.2.13.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.13.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SmsManagementSubscriptionData	M	1	200 OK	Upon success, a response body containing the SMS Management Subscription Data shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.14 Resource: ProvisionedParameterData

5.2.14.1 Description

This resource represents the subscribed ProvisionedParameterData for a GPSI. It is triggered by the AF/NEF via the UDM to update provisioned data stored for the subscriber.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.14.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/pp-data

This resource shall support the resource URI variables defined in table 5.2.14.2-1.

Table 5.2.14.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-.+ msisdn-[0-9]{5,15} extid-.+ .+)"

5.2.14.3 Resource Standard Methods

5.2.14.3.1 GET

This method retrieves the provisioned data of a given UE.

This method shall support the URI query parameters specified in table 5.2.14.3.1-1.

Table 5.2.14.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.14.3.1-2 and the response data structures and response codes specified in table 5.2.14.3.1-3.

Table 5.2.14.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.14.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
PpData	M	1	200 OK	Upon success, a response body is returned containing the provisioned data of the GPSI.

5.2.14.3.2 PATCH

tbd

5.2.15 Resource: SMSSubscriptionData

5.2.15.1 Description

This resource represents the subscribed SMS Subscription Data for a SUPI for use in a serving PLMN. It is queried by the AMF via the UDM after registering.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.15.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/{serving-plmn-id}/provisioned-data/sms-data

This resource shall support the resource URI variables defined in table 5.2.15.2-1.

Table 5.2.15.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
Ue-id	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-.+ msisdn-[0-9]{5,15} extid-.+ .+)")
serving-plmn-id	Represents the Serving PLMN ID (<MCC><MNC>) pattern: "[0-9]{5,6}"

5.2.15.3 Resource Standard Methods

5.2.15.3.1 GET

This method shall support the URI query parameters specified in table 5.2.15.3.1-1.

Table 5.2.15.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.15.3.1-2 and the response data structures and response codes specified in table 5.2.15.3.1-3.

Table 5.2.15.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.15.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SmsSubscription Data	M	1	200 OK	Upon success, a response body containing the SMS Management Subscription Data shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.16 Resource: SdmSubscriptions

5.2.16.1 Description

This resource represents the collection of SDM Subscriptions for a UE.

This resource is modelled with the Store resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.16.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/context-data/sdm-subscriptions

This resource shall support the resource URI variables defined in table 5.2.16.2-1.

Table 5.2.16.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-.[+] msisdn-[0-9]{5,15} extid-.[+].+)"

5.2.16.3 Resource Standard Methods

5.2.16.3.1 GET

This method shall support the URI query parameters specified in table 5.2.16.3.1-1.

Table 5.2.16.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.16.3.1-2 and the response data structures and response codes specified in table 5.2.16.3.1-3.

Table 5.2.16.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.16.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(SdmSubscription)	M	1..N	200 OK	Upon success, a response body containing the individual SDM subscriptions shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.16.3.2 POST

This method shall support the URI query parameters specified in table 5.2.16.3.2-1.

Table 5.2.16.3.2-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.16.3.1-2 and the response data structures and response codes specified in table 5.2.16.3.1-3.

Table 5.2.16.3.2-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
SdmSubscription	M	1	Identifies the subscriber data subscription to be stored in the UDR.

Table 5.2.16.3.2-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SdmSubscription	M	1	201 Created	Upon success, a response body containing a representation of the UeId's Individual subscription resource shall be returned. The HTTP response shall include a "Location" HTTP header that contains the resource URI of the created resource.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.17 Resource: IndividualSdmSubscription

5.2.17.1 Description

This resource represents an individual SDM Subscription for a UE.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.17.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/context-data/sdm-subscriptions/{subsId}

This resource shall support the resource URI variables defined in table 5.2.17.2-1.

Table 5.2.17.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-.+ msisdn-[0-9]{5,15} extid-.+ .+)"
subsId	Identifier of the subscription (as allocated by the UDM)

5.2.17.3 Resource Standard Methods

5.2.17.3.1 PUT

This method shall support the URI query parameters specified in table 5.2.17.3.1-1.

Table 5.2.17.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.17.3.1-2 and the response data structures and response codes specified in table 5.2.17.3.1-3.

Table 5.2.17.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
SdmSubscription	M	1	The individual SDM subscription that is to be stored

Table 5.2.17.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.17.3.2 DELETE

This method shall support the URI query parameters specified in table 5.2.17.3.2-1.

Table 5.2.17.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.17.3.2-2 and the response data structures and response codes specified in table 5.2.17.3.2-3.

Table 5.2.17.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.17.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.18 Resource: EeSubscriptions

5.2.18.1 Description

This resource represents the collection of EEM Subscriptions for a UE.

This resource is modelled with the Store resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.18.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/context-data/ee-subscriptions

This resource shall support the resource URI variables defined in table 5.2.18.2-1.

Table 5.2.18.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueld	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-.+ msisdn-[0-9]{5,15} extid-.+ .+)"

5.2.18.3 Resource Standard Methods

5.2.18.3.1 GET

This method shall support the URI query parameters specified in table 5.2.18.3.1-1.

Table 5.2.18.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.18.3.1-2 and the response data structures and response codes specified in table 5.2.18.3.1-3.

Table 5.2.18.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.18.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(EeSubscription)	M	1..N	200 OK	Upon success, a response body containing the individual EE subscriptions shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.18.3.2 POST

This method shall support the URI query parameters specified in table 5.2.18.3.2-1.

Table 5.2.18.3.2-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.18.3.1-2 and the response data structures and response codes specified in table 5.2.18.3.1-3.

Table 5.2.18.3.2-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
EeSubscription	M	1	Identifies the subscriber data subscription to be stored in the UDR.

Table 5.2.18.3.2-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
EeSubscription	M	1	201 Created	Upon success, a response body containing a representation of the UeId's Individual subscription resource shall be returned. The HTTP response shall include a "Location" HTTP header that contains the resource URI of the created resource.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.19 Resource: IndividualEeSubscription

5.2.19.1 Description

This resource represents an individual EE Subscription for a UE.

This resource is modelled with the Document resource archetype (see subclause C.1 of 3GPP TS 29.501 [7]).

5.2.19.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/{ueId}/context-data/ee-subscriptions/{subsId}

This resource shall support the resource URI variables defined in table 5.2.19.2-1.

Table 5.2.19.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
ueId	Represents the Subscription Identifier SUPI or GPSI (see 3GPP TS 23.501 [4] clause 5.9.2) pattern: "(imsi-[0-9]{5,15} nai-+ msisdn-[0-9]{5,15} extid-+ .+)")
subsId	Identifier of the subscription (allocated by the UDM)

5.2.19.3 Resource Standard Methods

5.2.19.3.1 PUT

This method shall support the URI query parameters specified in table 5.2.19.3.1-1.

Table 5.2.19.3.1-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.19.3.1-2 and the response data structures and response codes specified in table 5.2.19.3.1-3.

Table 5.2.19.3.1-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
EeSubscription	M	1	The individual SDM subscription that is to be stored

Table 5.2.19.3.1-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.19.3.2 DELETE

This method shall support the URI query parameters specified in table 5.2.19.3.2-1.

Table 5.2.19.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.19.3.2-2 and the response data structures and response codes specified in table 5.2.19.3.2-3.

Table 5.2.19.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.19.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.20 Resource: SubscriptionDataSubscriptions

5.2.20.1 Description

This resource is used to represent explicit subscriber data subscriptions to notifications.

5.2.20.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/subs-to-notify

This resource shall support the resource URI variables defined in table 5.2.20.2-1.

Table 5.2.20.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1

5.2.20.3 Resource Standard Methods

5.2.20.3.1 POST

This method shall support the URI query parameters specified in table 5.2.20.3.1-1.

Table 5.2.20.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.20.3.1-2 and the response data structures and response codes specified in table 5.2.20.3.1-3.

Table 5.2.20.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
SubscriptionDataSubscriptions	M	1	Identifies the subscriber data subscription to be stored in the UDR.

Table 5.2.20.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
SubscriptionDataSubscriptions	M	1	201 Created	Upon success, a response body containing a representation of the UDR's Individual subscription resource shall be returned. The HTTP response shall include a "Location" HTTP header that contains the resource URI of the created resource.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.2.21 Resource: IndividualSubscriptionDataSubscription

5.2.21.1 Description

This resource is used to represent an individual subscriber data subscriptions to notifications.

5.2.21.2 Resource Definition

Resource URI: {apiRoot}/nudr-dr/v1/subscription-data/subsc-to-notify/{subsId}

This resource shall support the resource URI variables defined in table 5.2.21.2-1.

Table 5.2.21.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	See 3GPP TS 29.504 [2] subclause 6.1.1
subsId	The subsId identifies an individual SubscriptionDataSubscriptions to notifications. The value is allocated by the UDR during creation of the SubscriptionDataSubscriptions resource.

5.2.21.3 Resource Standard Methods

5.2.21.3.1 DELETE

This method shall support the URI query parameters specified in table 5.2.21.3.1-1.

Table 5.2.21.3.1-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.21.3.1-2 and the response data structures and response codes specified in table 5.2.21.3.1-3.

Table 5.2.21.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			The request body shall be empty.

Table 5.2.21.3.1-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.3 Notifications

5.3.1 General

This subclause describes the resources to provide Notification to NF service consumers which have subscribed to be notified when data is changed.

5.3.2 Data Change Notification

The POST method shall be used for Data Change Notifications and the URI shall be as provided during the subscription procedure.

NOTE: A stateless UDM/NF has provided a URI which identifies a set of UDMs/NFs, a stateful UDM/NF has provided a specific URI identifying a node.

Resource URI: {callbackReference}

Support of URI query parameters is specified in table 5.3.2-1.

Table 5.3.2-1: URI query parameters supported by the POST method

Name	Data type	P	Cardinality	Description
n/a				

Support of request data structures is specified in table 5.3.2-2 and of response data structures and response codes is specified in table 5.3.2-3.

Table 5.3.2-2: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
DataChangeNotify	M	1	

Table 5.3.2-3: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Upon success, an empty response body shall be returned.
NOTE: In addition common data structures as listed in table 5.5-1 are supported.				

5.4 Data Model

5.4.1 General

This subclause specifies the application data model supported by the API.

Table 5.4.1-1 specifies the data types defined for the Nudr service based interface protocol.

Table 5.4.1-1: Nudr Subscriber Data specific Data Types

Data type	Section defined	Description
AuthenticationData	5.4.2.2	A UE's authentication data
OperatorSpecificDataContainer	5.4.2.3	Container for operator specific data
SmfRegList	5.4.2.4	The list of all the SMF registrations of a UE
SubscriptionDataSubscriptions	5.4.2.5	A subscription to notifications.
DataChangeNotify	5.4.2.6	Container for data which have changed and notification was requested when changed.

Table 5.4.1-2 specifies data types re-used by the Nudr service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nudr service based interface.

Table 5.4.1-2: Nudr re-used Data Types

Data type	Reference	Comments
Nssai	3GPP TS 29.503 [6]	Network Slice Selection Assistance Information
AccessAndMobilitySubscriptionData	3GPP TS 29.503 [6]	Access and Mobility Subscription Data
SmfSelectionSubscriptionData	3GPP TS 29.503 [6]	SMF Selection Subscription Data
SessionManagementSubscriptionData	3GPP TS 29.503 [6]	Session Management Subscription Data
Amf3GppAccessRegistration	3GPP TS 29.503 [6]	
AmfNon3GppAccessRegistration	3GPP TS 29.503 [6]	The complete set of information relevant to the AMF where the UE has registered via non 3GPP access.
SmfRegistration	3GPP TS 29.503 [6]	
SmsfRegistration	3GPP TS 29.503 [6]	
SmsManagementSubscriptionData	3GPP TS 29.503 [6]	
ProblemDetails	3GPP TS 29.571 [7]	Detailed information about the status code.
PpData	3GPP TS 29.503 [6]	
SmsSubscriptionData	3GPP TS 29.503 [6]	
PatchItem	3GPP TS 29.571 [7]	Data structure used for JSON patch.
SdmSubscription	3GPP TS 29.503 [6]	
EeSubscription	3GPP TS 29.503 [6]	
Uri	3GPP TS 29.571 [7]	

5.4.2 Structured data types

5.4.2.1 Introduction

This subclause defines the structures to be used in resource representations.

Allowed structures are: array, object.

5.4.2.2 Type: AuthenticationData

Table 5.4.2.2-1: Definition of type AuthenticationData

Attribute name	Data type	P	Cardinality	Description
authenticationMethod	AuthMethod	M	1	string either "5G_AKA" or "EAP_AKA_PRIME"
permanentKey				
sequenceNumber				
tbc				

5.4.2.3 Type: OperatorSpecificDataContainer

Table 5.4.2.3-1: Definition of type OperatorSpecificDataContainer

Attribute name	Data type	P	Cardinality	Description
dataType	string	M	1	This attribute value must be a string equals to the name of the actual data type of the "Value" attribute.
value	any type	M	1	

5.4.2.4 Type: SmfRegList

Table 5.4.2.4-1: Definition of type SmfRegList

Attribute name	Data type	P	Cardinality	Description
N/A	array(SmfRegistration)	M	1..N	Each member of the array is an individual SMF registration of the UE.

5.4.2.5 Type: SubscriptionDataSubscriptions

Table 5.4.2.5-1: Definition of type SubscriptionDataSubscriptions

Attribute name	Data type	P	Cardinality	Description
callbackReference	Uri	M	1	Identifies the UDM/NF pool or an individual UDM/NF which should be used by the UDR to send notification to UDM/NF.
originalCallbackReference	Uri	O	0..1	URI provided by the NF service consumer to the UDM to receive notifications from the UDR.
ueld	string	O	0..1	User identity if subscription to notifications is related to a user.
monitoredResourceUri	array(Uri)	M	1..N	A set or URIs that identify the resources for which a modification of the representation triggers a notification.

5.4.2.6 Type: DataChangeNotify

Table 5.4.2.6-1: Definition of type DataChangeNotify

Attribute name	Data type	P	Cardinality	Description
originalCallbackReference	array(Uri)	C	0..N	Original Callback Reference shall be present if a UDM has subscribed to notification due to an request from an NF. If present it is Identifying the NF to which the UDM has to provide the notification of data change.
accessAndMobilitySubscriptionData	AccessAndMobilitySubscriptionData	O	0..1	Access and Mobility Subscription Data, if changed and notification was requested.
smfSelectionSubscriptionData	SmfSelectionSubscriptionData	O	0..1	SMF Selection Subscription Data, if changed and notification was requested.
sessionManagementSubscriptionData	SessionManagementSubscriptionData	O	0..1	Session Management Subscription Data, if changed and notification was requested.
amf3GppAccessRegistration	Amf3GppAccessRegistration	O	0..1	AMF 3GPP Access Registration, if changed and notification was requested.
amfNon3GppAccessRegistration	AmfNon3GppAccessRegistration	O	0..1	AMF non 3GPP Access Registration, if changed and notification was requested.
operatorSpecificData	OperatorSpecificData	O	0..1	Operator specific data, if changed and notification was requested.
smsManagementSubscriptionData	SmsManagementSubscriptionData	O	0..1	SMS Management Subscription Data, if changed and notification was requested.
smsf3GppAccessRegistration	Smsf3GppAccessRegistration	O	0..1	SMSF 3GPP Access Registration, if changed and notification was requested.
smsfNon3GppAccessRegistration	SmsfNon3GppAccessRegistration	O	0..1	SMSF non 3GPP Access Registration, if changed and notification was requested.
eeSubscriptions	EeSubscriptions	O	0..1	EE subscriptions, if changed and notification was requested and the change was not provided by a UDM.
provisionedParameterData	ProvisionedParameterData	O	0..1	Provisioned parameter data, if changed and notification was requested.
smsSubscriptionData	SmsSubscriptionData	O	0..1	SMS subscriptions, if changed and notification was requested.

5.4.3 Simple data types and enumerations

5.4.3.1 Introduction

This subclause defines simple data types and enumerations that can be referenced from data structures defined in the previous subclauses.

5.4.3.2 Simple data types

The simple data types defined in table 5.4.3.2-1 shall be supported.

Table 5.4.3.2-1: Simple data types

Type Name	Type Definition	Description

5.4.3.3 Enumeration: AuthMethod

Table 5.4.3.3-1: Enumeration AuthMethod

Enumeration value	Description
"5G_AKA"	5G AKA
"EAP_AKA_PRIME"	EAP AKA'

5.4.4 Binary data

N/A

5.5 Error handling

Table 5.5-1 lists common response body data structures used within the Nudr-dr API

Table 5.5-1: Common Response Body Data Structures

Data type	P	Cardinality	Response codes	Description
ProblemDetails	O	0..1	4xx, 5xx responses	For unsuccessful status codes, the UDR may provide detailed information.

NOTE: In addition common data structures as defined in 3GPP TS 29.500 [8] are supported.

The application layer error handling shall follow 3GPP TS 29.504 [2] subclause 6.1.6 unless explicitly specified in this document.

5.6 Feature negotiation

N/A

Annex A (normative): OpenAPI specification

A.1 General

This Annex specifies the formal definition of the Nudr_DataRepository service. It consists of OpenAPI 3.0.0 specifications, in YAML format.

A.2 Nudr_DataRepository API

```

openapi: 3.0.0
info:
  version: 1.PreR15.0.0
  title: 'UDR Data Repository Service for subscriber data'
  description: 'UDR Data Repository Service for subscriber data'
servers:
  - description: API root
    url: https://{apiRoot}/nudr-dr/v1
    variables:
      apiRoot:
        default: https://demohost.com

security:
  - oAuth2Clientcredentials: []

paths:
  /subscription-data/{ueId}/authentication-data:

```

```

get:
  summary: Retrieves the authentication data of a UE
  operationId: QueryAuthData
  tags:
    - Authentication Data (Document)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
  responses:
    '200':
      description: Expected response to a valid request
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AuthenticationData'
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
patch:
  summary: modify the authentication data of a UE
  operationId: ModifyAuthData
  tags:
    - Authentication Data (Document)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
  requestBody:
    content:
      application/json-patch+json:
        schema:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PatchItem'
        required: true
  responses:
    '204':
      description: Expected response to a valid request
    '403':
      description: modification is rejected
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
/subscription-data/{ueId}/{servingPlmnId}/provisioned-data/am-data:
get:
  summary: Retrieves the access and mobility subscription data of a UE
  operationId: QueryAmData
  tags:
    - Access And Mobility Subscription Data (Document)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
    - name: servingPlmnId
      in: path
      description: PLMN ID
      required: true

```

```

    schema:
      $ref: '#/components/schemas/VarPlmnId'
  - name: fields
    in: query
    description: attributes to be retrieved
    required: false
    schema:
      type: array
      items:
        type: string
  responses:
    '200':
      description: Expected response to a valid request
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AccessAndMobilitySubscriptionData'
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'

/subscription-data/{ueId}/{servingPlmnId}/provisioned-data/smf-selection-subscription-data:
  get:
    summary: Retrieves the SMF selection subscription data of a UE
    operationId: QuerySmfSelectData
    tags:
      - SMF Selection Subscription Data (Document)
    parameters:
      - name: ueId
        in: path
        description: UE id
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
      - name: servingPlmnId
        in: path
        description: PLMN ID
        required: true
        schema:
          $ref: '#/components/schemas/VarPlmnId'
      - name: fields
        in: query
        description: attributes to be retrieved
        required: false
        schema:
          type: array
          items:
            type: string
    responses:
      '200':
        description: Expected response to a valid request
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/SmfSelectionSubscriptionData'
      default:
        description: Unexpected error
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'

/subscription-data/{supi}/{servingPlmnId}/provisioned-data/sm-data:
  get:
    summary: Retrieves the Session Management subscription data of a UE
    operationId: QuerySmData
    tags:
      - Session Management Subscription Data
    parameters:
      - name: supi
        in: path
        description: SUPI
        required: true
        schema:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'

```

```

- name: servingPlmnId
  in: path
  description: PLMN ID
  required: true
  schema:
    $ref: '#/components/schemas/VarPlmnId'
- name: singleNssai
  in: query
  description: single NSSAI
  required: false
  schema:
    $ref: '#/components/schemas/VarSnsai'
- name: dnn
  in: query
  description: DNN
  required: false
  schema:
    $ref: '#/components/schemas/Dnn'
- name: fields
  in: query
  description: attributes to be retrieved
  required: false
  schema:
    type: array
    items:
      type: string
responses:
  '200':
    description: Expected response to a valid request
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/SessionManagementSubscriptionData'
  default:
    description: Unexpected error
    content:
      application/problem+json:
        schema:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
/subscription-data/{ueId}/context-data/amf-3gpp-access:
  get:
    summary: Retrieves the AMF context data of a UE using 3gpp access
    operationId: QueryAmfContext3gpp
    tags:
      - AMF 3GPP Access Registration (Document)
    parameters:
      - name: ueId
        in: path
        description: UE id
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
      - name: fields
        in: query
        description: attributes to be retrieved
        required: false
        schema:
          type: array
          items:
            type: string
    responses:
      '200':
        description: Expected response to a valid request
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/Amf3GppAccessRegistration'
      default:
        description: Unexpected error
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
  put:
    summary: To store the AMF context data of a UE using 3gpp access in the UDR
    operationId: CreateAmfContext3gpp
    tags:

```



```

    - AMF 3GPP Access Registration (Document)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
  requestBody:
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/Amf3GppAccessRegistration'
  responses:
    '204':
      description: Upon success, an empty response body shall be returned
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
  patch:
    summary: To modify the AMF context data of a UE using 3gpp access in the UDR
    operationId: AmfContext3gpp
    tags:
      - AMF 3GPP Access Registration (Document)
    parameters:
      - name: ueId
        in: path
        description: UE id
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
    requestBody:
      content:
        application/json-patch+json:
          schema:
            type: array
            items:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/PatchItem'
          required: true
    responses:
      '204':
        description: Expected response to a valid request
      '403':
        description: modification is rejected
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'

/subscription-data/{ueId}/context-data/amf-non-3gpp-access:
  get:
    summary: Retrieves the AMF context data of a UE using non-3gpp access
    operationId: QueryAmfContextNon3gpp
    tags:
      - AMF Non-3GPP Access Registration (Document)
    parameters:
      - name: ueId
        in: path
        description: UE id
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
      - name: fields
        in: query
        description: attributes to be retrieved
        required: false
        schema:
          type: array
          items:

```

```

        type: string
responses:
  '200':
    description: Expected response to a valid request
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/AmfNon3GppAccessRegistration'
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
put:
  summary: To store the AMF context data of a UE using non-3gpp access in the UDR
  operationId: CreateAmfContextNon3gpp
  tags:
    - AMF Non-3GPP Access Registration (Document)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
  requestBody:
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/AmfNon3GppAccessRegistration'
  responses:
    '204':
      description: Upon success, an empty response body shall be returned
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
patch:
  summary: To modify the AMF context data of a UE using non 3gpp access in the UDR
  operationId: AmfContextNon3gpp
  tags:
    - AMF Non-3GPP Access Registration (Document)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
  requestBody:
    content:
      application/json-patch+json:
        schema:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PatchItem'
        required: true
  responses:
    '204':
      description: Expected response to a valid request
    '403':
      description: modification is rejected
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
/subscription-data/{ueId}/context-data/smf-registrations:
  get:

```

```

summary: Retrieves the SMF registration list of a UE
operationId: QuerySmfRegList
tags:
  - SMF Registrations (Collection)
parameters:
  - name: ueId
    in: path
    description: UE id
    required: true
    schema:
      $ref: '#/components/schemas/VarUeId'
responses:
  '200':
    description: Expected response to a valid request
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/SmfRegList'
  default:
    description: Unexpected error
    content:
      application/problem+json:
        schema:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'

/subscription-data/{ueId}/context-data/smf-registrations/{pduSessionId}:
get:
  summary: Retrieves the individual SMF registration of a UE
  operationId: QuerySmfRegistration
  tags:
    - SMF Registration (Document)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
    - name: pduSessionId
      in: path
      description: PDU session id
      required: true
      schema:
        type: string
    - name: fields
      in: query
      description: attributes to be retrieved
      required: false
      schema:
        type: array
        items:
          type: string
  responses:
    '200':
      description: Expected response to a valid request
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/SmfRegistration'
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'

put:
  summary: To create an individual SMF context data of a UE in the UDR
  operationId: CreateSmfContextNon3gpp
  tags:
    - SMF Registration (Document)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
    - name: pduSessionId

```

```

    in: path
    description: PDU session id
    required: true
    schema:
      type: integer
  requestBody:
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/SmfRegistration'
  responses:
    '201':
      description: Upon success, a response body containing a representation of the created
Individual SmfRegistration resource shall be returned
      default:
        description: Unexpected error
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
delete:
  summary: To remove an individual SMF context data of a UE the UDR
  operationId: DeleteSmfContext
  tags:
    - SMF Registration (Document)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
    - name: pduSessionId
      in: path
      description: PDU session id
      required: true
      schema:
        type: string
  responses:
    '204':
      description: Upon success, an empty response body shall be returned.
      default:
        description: Unexpected error
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'

/subscriber-data/{ueId}/operator-specific-data:
  get:
    summary: Retrieves the operator specific data of a UE
    operationId: QueryOperSpecData
    tags:
      - Operator-Specific Data Container (Document)
    parameters:
      - name: ueId
        in: path
        description: UE id
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
      - name: fields
        in: query
        description: attributes to be retrieved
        required: false
        schema:
          type: array
          items:
            type: string
    responses:
      '200':
        description: Expected response to a valid request
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/OperatorSpecificDataContainer'
      default:
        description: Unexpected error

```

```

        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
    patch:
      summary: To modify operator specific data of a UE
      operationId: AmfContext3gpp
      tags:
        - Operator-Specific Data Container (Document)
      parameters:
        - name: ueId
          in: path
          description: UE id
          required: true
          schema:
            $ref: '#/components/schemas/VarUeId'
      requestBody:
        content:
          application/json-patch+json:
            schema:
              type: array
              items:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/PatchItem'
            required: true
      responses:
        '204':
          description: Expected response to a valid request
        '403':
          description: modification is rejected
          content:
            application/problem+json:
              schema:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
      default:
        description: Unexpected error
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'

/subscriber-data/{ueId}/context-data/smsf-3gpp-access:
  put:
    summary: Create the SMSF context data of a UE via 3GPP access
    operationId: CreateSmsfContext3gpp
    tags:
      - SMSF 3GPP Registration (Document)
    parameters:
      - name: ueId
        in: path
        description: UE id
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/SmsfRegistration'
    responses:
      '204':
        description: Upon success, an empty response body shall be returned
      default:
        description: Unexpected error
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
  delete:
    summary: To remove the SMSF context data of a UE via 3GPP access
    operationId: DeleteSmsfContext3gpp
    tags:
      - SMSF 3GPP Registration (Document)
    parameters:
      - name: ueId
        in: path
        description: UE id
        required: true
        schema:

```

```

    $ref: '#/components/schemas/VarUeId'
  responses:
    '204':
      description: Upon success, an empty response body shall be returned
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
  get:
    summary: Retrieves the SMSF context data of a UE using 3gpp access
    operationId: QuerySmsfContext3gpp
    tags:
      - SMSF 3GPP Registration (Document)
    parameters:
      - name: ueId
        in: path
        description: UE id
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
      - name: fields
        in: query
        description: attributes to be retrieved
        required: false
        schema:
          type: array
          items:
            type: string
    responses:
      '200':
        description: Expected response to a valid request
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/SmsfRegistration'
      default:
        description: Unexpected error
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
/subscriber-data/{ueId}/context-data/smsf-non-3gpp-access:
  put:
    summary: Create the SMSF context data of a UE via non-3GPP access
    operationId: CreateSmsfContextNon3gpp
    tags:
      - SMSF Non-3GPP Registration (Document)
    parameters:
      - name: ueId
        in: path
        description: UE id
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/SmsfRegistration'
    responses:
      '204':
        description: Upon success, an empty response body shall be returned
      default:
        description: Unexpected error
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
  delete:
    summary: To remove the SMSF context data of a UE via non-3GPP access
    operationId: DeleteSmsfContextNon3gpp
    tags:
      - SMSF Non-3GPP Registration (Document)
    parameters:
      - name: ueId

```

```

    in: path
    description: UE id
    required: true
    schema:
      $ref: '#/components/schemas/VarUeId'
  responses:
    '204':
      description: Upon success, an empty response body shall be returned
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
get:
  summary: Retrieves the SMSF context data of a UE using non-3gpp access
  operationId: QuerySmsfContextNon3gpp
  tags:
    - SMSF Non-3GPP Registration (Document)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
    - name: fields
      in: query
      description: attributes to be retrieved
      required: false
      schema:
        type: array
        items:
          type: string
  responses:
    '200':
      description: Expected response to a valid request
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/SmsfRegistration'
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
/subscription-data/{ueId}/{servingPlmnId}/provisioned-data/sms-mng-data:
get:
  summary: Retrieves the SMS management subscription data of a UE
  operationId: QuerySmsMngData
  tags:
    - SMS Management Subscription Data (Document)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
    - name: servingPlmnId
      in: path
      description: PLMN ID
      required: true
      schema:
        $ref: '#/components/schemas/VarPlmnId'
  responses:
    '200':
      description: Expected response to a valid request
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/SmsManagementSubscriptionData'
    default:
      description: Unexpected error
      content:
        application/problem+json:

```

```
    schema:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
/subscription-data/{ueId}/{servingPlmnId}/provisioned-data/sms-data:
  get:
    summary: Retrieves the SMS subscription data of a UE
    operationId: QuerySmsData
    tags:
      - SMS Subscription Data (Document)
    parameters:
      - name: ueId
        in: path
        description: UE id
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
      - name: servingPlmnId
        in: path
        description: PLMN ID
        required: true
        schema:
          $ref: '#/components/schemas/VarPlmnId'
    responses:
      '200':
        description: Expected response to a valid request
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/SmsSubscriptionData'
        default:
          description: Unexpected error
          content:
            application/problem+json:
              schema:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
/subscription-data/{ueId}/pp-data:
  get:
    summary: Read the profile of a given UE
    operationId: GetppData
    tags:
      - Parameter Provision (Document)
    parameters:
      - name: ueId
        in: path
        description: pp data for a UE
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
    responses:
      '200':
        description: Expected response to a valid request
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/PpData'
      '403':
        description: Forbidden
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
        default:
          description: Unexpected error
          content:
            application/problem+json:
              schema:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
/subscription-data/{ueId}/context-data/ee-subscriptions:
  get:
    summary: Retrieves the ee subscriptions of a UE
    operationId: Queryeesubscriptions
    tags:
      - Event Exposure Subscriptions (Collection)
    parameters:
      - name: ueId
        in: path
```



```

    description: UE id
    required: true
    schema:
      $ref: '#/components/schemas/VarUeId'
  responses:
    '200':
      description: Expected response to a valid request
      content:
        application/json:
          schema:
            type: array
            items:
              $ref: '#/components/schemas/EeSubscription'
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
  post:
    summary: Create individual EE subscription
    operationId: CreateEeSubscriptions
    tags:
      - Event Exposure Subscriptions (Collection)
    parameters:
      - name: ueId
        in: path
        description: UE ID
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/EeSubscription'
      required: true
    responses:
      '201':
        description: Expected response to a valid request
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/EeSubscription'
      default:
        description: Unexpected error
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
/subscription-data/{ueId}/context-data/ee-subscriptions/{subsId}:
  put:
    summary: Stores an individual ee subscriptions of a UE
    operationId: UpdateEesubscriptions
    tags:
      - Event Exposure Subscription (Document)
    parameters:
      - name: ueId
        in: path
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
      - name: subsId
        in: path
        required: true
        schema:
          type: string
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/EeSubscription'
    responses:
      '204':
        description: Upon success, an empty response body shall be returned
      default:
        description: Unexpected error

```

```

    content:
      application/problem+json:
        schema:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
delete:
  summary: Deletes a eeSubscription
  operationId: RemoveeeSubscriptions
  tags:
    - Event Exposure Subscription (Document)
  parameters:
    - name: ueId
      in: path
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
    - name: subsId
      in: path
      required: true
      description: Unique ID of the subscription to remove
      schema:
        type: string
  responses:
    '204':
      description: Expected response to a successful subscription removal

/subscription-data/{ueId}/context-data/sdm-subscriptions:
get:
  summary: Retrieves the sdm subscriptions of a UE
  operationId: Querysdmsubscriptions
  tags:
    - SDM Subscriptions (Collection)
  parameters:
    - name: ueId
      in: path
      description: UE id
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
  responses:
    '200':
      description: Expected response to a valid request
      content:
        application/json:
          schema:
            type: array
            items:
              $ref: '#/components/schemas/SdmSubscription'
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
post:
  summary: Create individual sdm subscription
  operationId: CreateSdmSubscriptions
  tags:
    - SDM Subscriptions (Collection)
  parameters:
    - name: ueId
      in: path
      description: UE ID
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
  requestBody:
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/SdmSubscription'
    required: true
  responses:
    '201':
      description: Expected response to a valid request
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/SdmSubscription'

```

```

    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'

/subscription-data/{ueId}/context-data/sdm-subscriptions/{subsId}:
  put:
    summary: Stores an individual sdm subscriptions of a UE
    operationId: Updatesdmsubscriptions
    tags:
      - SDM Subscription (Document)
    parameters:
      - name: ueId
        in: path
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
      - name: subsId
        in: path
        required: true
        schema:
          type: string
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/SdmSubscription'
    responses:
      '204':
        description: Upon success, an empty response body shall be returned
      default:
        description: Unexpected error
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'

delete:
  summary: Deletes a sdmsubscriptions
  operationId: RemovesdmSubscriptions
  tags:
    - SDM Subscription (Document)
  parameters:
    - name: ueId
      in: path
      required: true
      schema:
        $ref: '#/components/schemas/VarUeId'
    - name: subsId
      in: path
      required: true
      description: Unique ID of the subscription to remove
      schema:
        type: string
  responses:
    '204':
      description: Expected response to a successful subscription removal

/subscription-data/subs-to-notify:
  post:
    summary: Subscription data subscriptions
    operationId: SubscriptionDataSubscriptions
    tags:
      - Subs To Nofify (Collection)
    parameters:
      - name: ueId
        in: path
        description: UE ID
        required: true
        schema:
          $ref: '#/components/schemas/VarUeId'
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/SubscriptionDataSubscriptions'
    required: true

```

```

responses:
  '201':
    description: Expected response to a valid request
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/SubscriptionDataSubscriptions'
    default:
      description: Unexpected error
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
callbacks:
  onDataChange:
    '{request.body#/callbackReference}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/DataChangeNotify'
        responses:
          '204':
            description: Expected response to a valid request

/subscription-data/subs-to-Notify/{subsId}:
delete:
  summary: Deletes a subscriptionDataSubscriptions
  operationId: RemovesubscriptionDataSubscriptions
  tags:
    - Subs To Notify (Document)
  parameters:
    - name: subsId
      in: path
      required: true
      description: Unique ID of the subscription to remove
      schema:
        type: string
  responses:
    '204':
      description: Expected response to a successful subscription removal

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes: {}
  schemas:
    VarUeId:
      type: string
      pattern: '(imsi-[0-9]{5,15}|nai-.+|msisdn-[0-9]{5,15}|extid-.+|.+) '
    AuthenticationData:
      required:
        - authenticationMethod
      properties:
        authenticationMethod:
          $ref: '#/components/schemas/AuthMethod'
        permanentKey:
          type: string #place holder
          # data type to be defined in normative text
        sequenceNumber:
          type: integer #place holder
          # data type to be defined in normative text
    VarPlmnId:
      type: string
      pattern: '[0-9]{5,6}'
    AccessAndMobilitySubscriptionData:
      $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/AccessAndMobilitySubscriptionData'
    SmfSelectionSubscriptionData:
      $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/SmfSelectionSubscriptionData'
    VarSnssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
    Dnn:

```

```

    $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
  SessionManagementSubscriptionData:
    $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/SessionManagementSubscriptionData'
  Amf3GppAccessRegistration:
    $ref: 'TS29503_Nudm_UECM.yaml#/components/schemas/Amf3GppAccessRegistration'
  AmfNon3GppAccessRegistration:
    $ref: 'TS29503_Nudm_UECM.yaml#/components/schemas/AmfNon3GppAccessRegistration'
  SmfRegistration:
    $ref: 'TS29503_Nudm_UECM.yaml#/components/schemas/SmfRegistration'
  SmsfRegistration:
    $ref: 'TS29503_Nudm_UECM.yaml#/components/schemas/SmsfRegistration'
  SmsManagementSubscriptionData:
    $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/SmsManagementSubscriptionData'
  SmsSubscriptionData:
    $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/SmsSubscriptionData'
  OperatorSpecificDataContainer:
    properties:
      StringTypeElements:
        type: object
        additionalProperties:
          type: string
      IntegerTypeElements:
        type: object
        additionalProperties:
          type: integer
      NumberTypeElements:
        type: object
        additionalProperties:
          type: number
      BooleanTypeElements:
        type: object
        additionalProperties:
          type: boolean
  AuthMethod:
    type: string
    enum:
      - 5G_AKA
      - EAP_AKA_PRIME
  PpData:
    $ref: 'TS29503_Nudm_PP.yaml#/components/schemas/PpData'
  EeSubscription:
    $ref: 'TS29503_Nudm_EE.yaml#/components/schemas/EeSubscription'
  SdmSubscription:
    $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/SdmSubscription'
  SmfRegList:
    type: array
    items:
      $ref: '#/components/schemas/SmfRegistration'
  SubscriptionDataSubscriptions:
    type: object
    required:
      - ueId
      - callbackReference
      - originalCallbackReference
    properties:
      ueId:
        type: string
      callbackReference:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      originalCallbackReference:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      monitoredResourceUri:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
  DataChangeNotify:
    type: object
    properties:
      originalCallbackReference:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      accessAndMobilitySubscriptionData:
        $ref: '#/components/schemas/AccessAndMobilitySubscriptionData'
      smfSelectionSubscriptionData:
        $ref: '#/components/schemas/SmfSelectionSubscriptionData'
      sessionManagementSubscriptionData:
        $ref: '#/components/schemas/SessionManagementSubscriptionData'
      amf3GppAccessRegistration:
        $ref: '#/components/schemas/Amf3GppAccessRegistration'

```

```
amfNon3GppAccessRegistration:
  $ref: '#/components/schemas/AmfNon3GppAccessRegistration'
operatorSpecificData:
  $ref: '#/components/schemas/OperatorSpecificDataContainer'
smsManagementSubscriptionData:
  $ref: '#/components/schemas/SmsManagementSubscriptionData'
smsf3GppAccessRegistration:
  $ref: '#/components/schemas/SmsfRegistration'
smsfNon3GppAccessRegistration:
  $ref: '#/components/schemas/SmsfRegistration'
eeSubscriptions:
  $ref: '#/components/schemas/EeSubscription'
provisionedParameterData:
  $ref: '#/components/schemas/PpData'
smsSubscriptionData:
  $ref: '#/components/schemas/SmsSubscriptionData'
externalDocs:
  description: Documentation
  url: 'http://www.3gpp.org/ftp/Specs/archive/29_series/29.505/29505-040.zip'
```

Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2018-01	CT4#82					TS skeleton of Usage of the Unified Data Repository service for Subscription Data	0.0.0
2018-01	CT4#82	C4-181397				Version after CT4#82 including agreed pCRs	0.1.0
2018-03	CT4#83	C4-182442				Version after CT4#83 including agreed pCRs	0.2.0
2018-04	CT4#84	C4-183523				Version after CT4#84 including agreed pCRs	0.3.0
2018-05	CT4#85	C4-184638				Version after CT4#85 including agreed pCRs	0.4.0
2018-06	CT#80	CP-181103				Presented for information and approval	1.0.0
2018-06	CT#80					Approved in CT#80.	15.0.0